ISEC

Arhiepiskopa Danila II 18 , 18000 Niš
Tel: 018 574 048
Mob: 060 339 79 09 | 060 339 79 59
www.isec.rs | office@isec.rs
Licenca MUP-a za privatno obezbedjenje : 18737

CENOVNIK UNIVIEW VIDEO NADZORA – 03.11.2026.



NAZIV	ŠIFRA	OPIS	CENA	
DVR UREDJAJI			sa PDV	bez PDV
4 KANALNI				
XVR301-04G3				
 	I1031	**4-CH Hybrid DVR** Podrzan video ulaz: 5MP @ 20fps (Prvi kanal 20fps, ostali 12fps) 5MP @ 12fps, 4MP @ 30fps (Prvi kanal) 4MP @ 15fps,1080P @ 30fps, 720P @ 60fps Podrzan video ulaz IP kamere: do 4MP (2 IP kamere ili svih 6) Rezolucija snimanja encoding: 5MP Lite/4MP Lite /1080P/720P/960H/D1/CIF Video kompresija: H.265, H.264 Video/audio ulazi: 4ch BNC, 1ch audio, RCA Video/audio izlazi: HDMI/VGA (FULL HD), 1ch audio Ulazno/Izlazni saobraćaj: 16/48 Mbps Smart funkcije: Detekcija pokreta, video loss detection Dodatni ulazi: RJ45 mrežni ulaz, 2xUSB 2.0 interfejs Mrežni protokoli: TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE Hard disk prostor: 1 sata HDD do 8TB kapaciteta Opšte: Napajanje 12V DC, Potrošnja 8W bez HDD, Podržava audio over coaxial cable Radna temperatura: -10 °C ~ +55 °C, Dimenzije: 260mm ×226mm× 47mm (10.2" × 8,9"×1.8"), 1.1kg	69,60	58,00
XVR301-04Q3				
	I1032	**4-CH Hybrid DVR** Rezolucija snimanja: 8MP Lite/5MP/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF Podržava TVI,AHD, CVI,CVBS Rezolucija snimanja IP kamera: do 8mp (2 IP kamere ili svih 6) Video kompresija: H.265, H.264 Video/audio ulazi: 4ch BNC, 1ch audio Video/audio izlazi: HDMI/VGA (FULL HD), CVBS (960x576), 1ch audio Ulazno/Izlazni saobraćaj: 48/60 Mbps Smart funkcije: Motion detection, video loss detection, audio detection, Dodatni ulazi: RJ45 mrežni ulaz, 2xUSB 2.0 interfejs, 1xRS485 Mrežni protokoli: TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP Hard disk: 1 sata HDD do 8TB kapaciteta Napajanje 12V DC, Potrošnja 10W bez HDD, Radna temperatura: -10 °C ~ +55 °C, Dimenzije: 260mm ×226mm× 47mm	96,00	80,00

XVR301-04U3



I1129

4-ch 1U Digital Video Recorder
Recording Resolution: 8MP/5MP/4MP/1080P/720P/D1
Support Ultra 265/H.265/H.264 video formats
Support audio over coaxial cable (TVI cameras)
Control the dual-light of UNV analog cameras under TVI
Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
Support 1-ch CVBS output, 1-ch VGA output,
1-ch HDMI output at up to 4K (3840 x 2160)
HDMI and VGA simultaneous output
Long transmission distance over coaxial cable
Support mainstream cameras of ONVIF and RTSP protocols
1HDD Up to 16 TB

144,00 120,00

8 KANALNI

XVR301-08G



I1176

8-Ch Digital Video Recorder
Support H.265/H.264 video formats
Recording Resolution: 5MP Lite/4MP Lite /1080P/720P/960H/D1/CIF
Support audio over coaxial cable (only for TVI cameras)
Control the dual-light of UNV analog cameras under TVI
Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
4/8/16-channel BNC input
Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080
HDMI and VGA simultaneous output
Long transmission distance over coaxial cable
Support mainstream cameras of ONVIF and RTSP protocols
1 SATA interface up to 6 TB

84,00 70,00

XVR301-08G3



I1025

8-CH Hybrid DVR
Podržava: TVI,AHD, CVI, CVBS
Rezolucija snimanja: 5MP Lite/4MP Lite /1080P/1080P Lite/720P/CIF
Rezolucija snimanja IP kamera: do 4mp (4 IP kamere ili svih 8)
Video/audio ulazi: 8-ch (BNC) / 1-ch (RCA)
Video/audio izlazi: HDMI/VGA (FULL HD), CVBS, 1ch audio
Ulazno/Izlazni saobraćaj: 32/64 Mbps
Dodatni ulazi: RJ45 mrežni ulaz, 2xUSB 2.0 interfejs
Mrežni protokoli: TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP
Hard disk: 1 sata HDD do 8TB
Napajanje 12V DC, Potrošnja 8W bez HDD
Radna temperatura: -10 °C ~ +55 °C
Dimenzije: 260mm ×226mm× 47mm

91,20 76,00

XVR301-08Q3



I1033

8-CH Hybrid DVR
Rezolucija snimanja: 8MP Lite/5MP/ 5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF
Podržava TVI,AHD, CVI,CVBS
Rezolucija snimanja IP kamera: do 8mp (4 IP kamere ili svih 12)
Video kompresija: H.265, H.264
Video/audio ulazi: 8ch BNC, 1ch audio
Video/audio izlazi: HDMI/VGA (FULL HD), CVBS (960x576), 1ch audio
Ulazno/Izlazni saobraćaj: 40/64 Mbps
Smart funkcije: Motion detection, video loss detection, audio detection,
Dodatni ulazi: RJ45 mrežni ulaz, 2xUSB 2.0 interfejs, 1xRS485, Alarmni ulaz/izlaz 4/1
Mrežni protokoli: TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP
Hard disk: 1 sata HDD do 8TB kapaciteta
Napajanje 12V DC,
Potrošnja 10W bez HDD,
Radna temperatura: -10 °C ~ +55 °C,
Dimenzije: 260mm ×226mm× 47mm

138,00 115,00

XVR301-08U3



I1080	**8-Ch 1U Digital Video Recorder** Recording Resolution: 8MP/5MP/4MP/1080P/720P/D1 Support Ultra 265/H.265/H.264 video formats Support audio over coaxial cable (TVI cameras) Control the dual-light of UNV analog cameras under TVI Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access 8-channel BNC input Support 1-ch CVBS output, 1-ch VGA output, 1-ch HDMI output at up to 4K (3840 x 2160) HDMI and VGA simultaneous output Long transmission distance over coaxial cable Support mainstream cameras of ONVIF and RTSP protocols	222,00	185,00

16 KANALNI

XVR301-16G3



I1026	**16-CH Hybrid DVR** Podržava: TVI, AHD, CVI, CVBS, IP cameras Rezolucija snimanja: 5MP Lite/4MP Lite /1080P/1080P Lite/720P/D1/CIF IP kamere: do 8 IP kamere ili svih 16 Video/audio ulazi: 16-ch BNC / 1-ch RCA Video/audio izlazi: VGA, HDMI, CVBS, 1ch audio Ulazno/Izlazni saobraćaj: 40/64 Mbps Dodatni ulazi: RJ45 mrežni ulaz, 2x USB, 1x RS485 Mrežni protokoli: TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP Hard disk: 1 SATA HDD do 8TB Napajanje 12V DC, Potrošnja 10W bez HDD Radna temperatura: -10 °C ~ +55 °C Dimenzije: 260mm ×226mm× 47mm	148,80	124,00

XVR302-16Q3



I1034	**16-CH Hybrid DVR** Rezolucija snimanja: 8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF Podržava 8MP@15fps na prva 4 kanala Rezolucija snimanja IP kamera: 8IP kamera (isključivanjem analognih kanala 24IP), svaki kanal do 8mpx. Ulazno/Izlazni saobraćaj: 72/80 Mbps Video kompresija: H.265/H.264 video kompresija, Video/audio ulazi: 16ch BNC, 1ch RCA Video/audio izlazi: HDMI/VGA (FULL HD), 1ch RCA Smart funkcije: Motion detection, tampering, video loss detection, face detection, instrusion detection, cross line detection, audio detection, defocus detection, scene change detection Dodatni ulazi: RJ45 mrežni ulaz, 1xUSB 3.0 interfejs (pozadi) 1xUSB 2.0 (napred), 1x RS485 Mrežni protokoli: TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE Hard disk prostor: 2 sata HDD do 6TB kapaciteta Opšte: Napajanje 12V DC, Potrošnja 12W bez HDD, Radna temperatura: -10 °C ~ +55 °C, Dimenzije: 380mm ×315mm× 53mm, Težina 1.9Kg	288,00	240,00

KIT/XVR 301-04G3/4*UAC-T112-F28



I1065	**UNV KIT/XVR 301-04G3/4*UAC-T112-F28** Kompet sadrži: 1x XVR 04G3 4x UAC-T112-F28 1x Napajanje 2A 4x 20m Koaksijalni kabl + napajanje (sa konektorima) 1x Razdelnik 1 /4	180,00	150,00

ANALOGNE DOME KAMERE 2MP

UAC-T112-AF28



I1066	**2MP HD Fixed IR Turret Analog Camera** 2MP high quality image TVI/AHD/CVI/CVBS IR-cut filter with auto switch (ICR) Built-in microphone Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages	24,00	20,00

UAC-T122-AF28LM 	I1054	**2MP LightHunter HD IR Fixed Turret Analog Camera** High quality imaging with 2MP resolution TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) LightHunter monitoring with high-sensitivity sensor 3D noise reduction technology delivers clean and sharp images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables Supports digital defog 3-Axis	36,00	30,00
UAC-T122-AF40LM 	I1099	**2MP LightHunter HD IR Fixed Turret Analog Camera** High quality imaging with 2MP resolution TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) LightHunter monitoring with high-sensitivity sensor 3D noise reduction technology delivers clean and sharp images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables Supports digital defog 3-Axis	36,00	30,00
UAC-T122-AF28M-W 	I1016	**2MP ColorHunter HD Fixed Turret Analog Camera** 2MP high quality imaging TVI/AHD/CVI/CVBS Supports white light illumination, 24/7 color images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables Supports digital defog Metal front face and housing 3-Axis	36,00	30,00
UAC-T142-AF28LM-DL 	I1077	**2MP ColorHunter Fixed Dual-light Turret Analog Camera** High quality imaging with 2MP resolution TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) Smart Dual Light (only TVI) 3D noise reduction technology delivers clean and sharp images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables	43,20	36,00

ANALOGNE BULLET KAMERE 2MP

UAC-B112-AF28 	I1121	**2MP Fixed IR Bullet Analog Camera** 2MP high quality image TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) 3D noise reduction technology delivers clean and sharp images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables	26,40	22,00
UAC-B122-AF28LM 	I1053	**2MP LightHunter HD IR Fixed Mini Bullet Analog Camera** High quality imaging with 2MP resolution TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) LightHunter monitoring with high-sensitivity sensor 3D noise reduction technology delivers clean and sharp images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables Supports digital defog	36,00	30,00

UAC-B122-AF40LM



I1098

2MP LightHunter HD IR Fixed Mini Bullet Analog Camera
High quality imaging with 2MP resolution
TVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
LightHunter monitoring with high-sensitivity sensor
3D noise reduction technology delivers clean and sharp images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables
Supports digital defog

36,00 30,00

UAC-B122-AF28M-W



I1014

2MP ColorHunter HD Fixed Mini Bullet Analog Camera
2MP high quality imaging
TVI/AHD/CVI/CVBS
Supports white light illumination, 24/7 color images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
SD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables
Supports digital defog
Metal front face and housing

36,00 30,00

UAC-B122-AF28M-W-Black



I1214

2MP ColorHunter HD Fixed Mini Bullet Analog Camera
2MP high quality imaging
TVI/AHD/CVI/CVBS
Supports white light illumination, 24/7 color images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
SD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables
Supports digital defog
Metal front face and housing

36,00 30,00

UAC-B122-AF40M-W



I1015

2MP ColorHunter HD Fixed Mini Bullet Analog Camera
2MP high quality imaging
TVI/AHD/CVI/CVBS
Supports white light illumination, 24/7 color images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables
Supports digital defog
Metal front face and housing

37,20 31,00

UAC-B142-AF28LM-DL



I1076

2MP ColorHunter Fixed Dual-light Bullet Analog Camera
High quality imaging with 2MP resolution
TVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
Smart Dual Light (only TVI)
3D noise reduction technology delivers clean and sharp images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables

46,80 39,00

UAC-B142-AF40LM-DL



I1122	**2MP ColorHunter Fixed Dual-light Bullet Analog Camera** High quality imaging with 2MP resolution TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) Smart Dual Light (only TVI) 3D noise reduction technology delivers clean and sharp images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables	46,80	39,00

ANALOGNE DOME KAMERE 5MP

UAC-T115-AF28



I1126	**5MP Fixed IR Turret Analog Camera** 5MP high quality image TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables	30,00	25,00

UAC-T125-AF28LM



I1056	**5MP LightHunter HD IR Fixed Turret Analog Camera** High quality imaging with 5MP resolution TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) LightHunter monitoring with high-sensitivity sensor Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables 3-Axis	46,80	39,00

UAC-T125-AF28M-W



I1020	**5MP ColorHunter HD Fixed Turret Analog Camera** 5MP high quality imaging TVI/AHD/CVI/CVBS Supports white light illumination, 24/7 color images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables Metal front face and housing 3-Axis	48,00	40,00

UAC-T145-AF28LM-DL



I1079	**5MP ColorHunter Fixed Dual-light Turret Analog Camera** High quality imaging with 5MP resolution TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) Smart Dual Light (only TVI) Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables	50,40	42,00

ANALOGNE BULLET KAMERE 5MP

UAC-B115-F28



I1002	**5MP HD Fixed IR Mini Bullet Analog Camera** 5MP high quality image TVI/AHD/CVI/CVBS IR-cut filter with auto switch (ICR) Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages	30,00	25,00

UAC-B115-AF28 	I1125	**5MP Fixed IR Bullet Analog Camera** 5MP high quality imageTVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables	30,00	25,00
UAC-B125-AF28LM 	I1055	**5MP LightHunter HD IR Fixed Mini Bullet Analog Camera** High quality imaging with 5MP resolution TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) LightHunter monitoring with high-sensitivity sensor Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables	44,40	37,00
UAC-B125-AF40LM 	I1124	**5MP LightHunter HD IR Fixed Mini Bullet Analog Camera** High quality imaging with 5MP resolution TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) LightHunter monitoring with high-sensitivity sensor Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables	44,40	37,00
UAC-B125-AF28M-W 	I1018	**5MP ColorHunter HD Fixed Mini Bullet Analog Camera** 5MP high quality imaging TVI/AHD/CVI/CVBS Supports white light illumination, 24/7 color images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables Metal front face and housing	48,00	40,00
UAC-B125-AF40M-W 	I1019	**5MP ColorHunter HD Fixed Mini Bullet Analog Camera** 5MP high quality imaging TVI/AHD/CVI/CVBS Supports white light illumination, 24/7 color images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables Metal front face and housing	49,20	41,00
UAC-B145-AF28LM-DL 	I1078	**5MP ColorHunter Fixed Dual-light Bullet Analog Camera** High quality imaging with 5MP resolution TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) Smart Dual Light (only TVI) Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables	54,00	45,00

UAC-B315-ADZLM



I1185	**5MP LightHunter VARIFOCAL IR Bullet Analog Camera** High quality imaging with 5MP resolution 2.8mm-12mm motorized lens TVI/AHD/CVI/CVBS Illumination Distance: 50m Supports IR cut filter with auto switch (ICR) LightHunter monitoring with high sensitivity sensor 3D noise reduction technology delivers clean and sharp images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built in microphone for high quality audio transmission via coaxial cables		90,00	75,00

NVR UREDJAJI

NVR301-04S3



I1049	**4-ch NVR** Rezolucija snimanja: 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p Ulazno/Izlazni saobraćaj: 64/48Mbps Video kompresija: Ultra 265, H.265, H.264 video kompresija, Video/audio izlazi: HDMI 4K resolution /VGA (FULL HD), Smart Funkcije:Face detection, Intrusion detection, Cross line detection, Audio detection ONVIF conformance: Profile S, Profile G, Profile T Pretraga snimka po smart funkcijama: Face search, Behavior search, Human Body search Dodatni ulazi: RJ45 mrežni ulaz, 2 x USB2.0,Audio out 3.5mm Mrežni protokoli: TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE Hard disk prostor: 1 sata HDD do 6TB kapaciteta Opšte: Napajanje 12V DC, Potrošnja 5W bez HDD, Radna temperatura: -10 °C ~ +55 °C, Dimenzije: 260mm × 240mm × 46mm (10.2"×9.4"×1.8 "), 1kg		108,00	90,00

NVR301-04B-IQ



I1115	**4-ch NVR** Decoding Capability: Smart Off： 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30 Smart On： 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30 Support Ultra 265/H.265/H.264 video formats Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T) and RTSP protocols Support HDMI and VGA simultaneous output Up to 12 Megapixels resolution recording ANR technology to enhance the storage reliability when the network is disconnected Support cloud upgrade 1x HDD, up to 10TB		132,00	110,00

NVR501-04B-IQ



I1150	**4-ch NVR** Decoding Capability: Smart Off: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30 Smart On: 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30 Support Ultra H.265/H.265/H.264 video formats Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution Support HDMI and VGA simultaneous output Up to 16 Megapixels resolution recording ANR technology to enhance the storage reliability when the network is disconnected Support cloud upgrade 1 SATA Interface, up to 16 TB		150,00	125,00

NVR301-08S3



I1048	**8-ch NVR** Rezolucija snimanja: 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF Ulazno/Izlazni saobraćaj: 64/48 Mbps Video kompresija: Ultra 265, H.265, H.264 video kompresija, Video/audio izlazi: 1-ch HDMI, 1-ch VGA, HDMI do 4K(3840x2160) rezolucije Smart Funkcije: Face detection, Intrusion detection, Cross line detection, Audio detection Pretraga snimka po smart funkcijama: Face search, Behavior search, Human Body search ONVIF conformance: Profile S, Profile G, Profile T Dodatni ulazi: RJ45 mrežni ulaz, 2xUSB 2.0,. Mrežni protokoli: P2P, UPnP, NTP, DHCP, PPPoE Hard disk prostor: 1 sata HDD do 6TB kapaciteta Opšte: Napajanje 12V DC, Potrošnja 5W bez HDD, Radna temperatura: -10 °C ~ +55 °C, Dimenzije: 260mm × 240mm × 46mm, Težina 1Kg		120,00	100,00

NVR301-08B-IQ



I1117

8-ch NVR
Decoding Capability: Smart Off： 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30
Smart On： 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30
Support Ultra 265/H.265/H.264 video formats
4/8/16 channel input
Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T) and RTSP protocols
Support HDMI and VGA simultaneous output
Up to 12 Megapixels resolution recording
ANR technology to enhance the storage reliability when the network is disconnected
Support cloud upgrade
1x HDD, up to 10TB

150,00 **125,00**

NVR501-08B-IQ



I1118

8-ch NVR
Decoding Capability: Smart Off: Smart Off: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30
Smart On: 2 x 12MP@30, 2 x 4K@30, 6 x 4MP@30, 8 x 3MP@30
Smart On: 2 x 12MP@30, 2 x 4K@30, 6 x 4MP@30, 8 x 3MP@30, 12 x 1080P@30, 16 x 720P@30
Support Ultra H.265/H.265/H.264 video formats
Supports mainstream cameras of ONVIF conformance (Profile S, Profile G, Profile T) and RTSP protocols
Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
Support HDMI and VGA simultaneous output
Up to 16 Megapixels resolution recording
ANR technology to enhance the storage reliability When the network is disconnected
Support cloud upgrade
1 SATA Interface, up to 16 TB

168,00 **140,00**

NVR301-16S3



I1116

16-ch NVR
Rezolucija snimanja: 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p
Ulazno/Izlazni saobraćaj: 64/48Mbps
Video kompresija: Ultra 265, H.265, H.264 video kompresija,
Video/audio izlazi: HDMI 4K resolution /VGA (FULL HD),
Smart Funkcije:Face detection, Intrusion detection,
Cross line detection, Audio detection
ONVIF conformance: Profile S, Profile G, Profile T
Pretraga snimka po smart funkcijama: Face search, Behavior search,
Human Body search
Dodatni ulazi: RJ45 mrežni ulaz, 2 x USB2.0,Audio out 3.5mm
Mrežni protokoli: TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Hard disk prostor: 1 sata HDD do 6TB kapaciteta
Opšte: Napajanje 12V DC, Potrošnja 5W bez HDD,
Radna temperatura: -10 °C ~ +55 °C,
Dimenzije: 260mm × 240mm × 46mm (10.2"×9.4"×1.8 "), 1kg

138,00 **115,00**

NVR301-16B-IQ



I1151

16-ch NVR
Decoding Capability – Smart Off： 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 10 x 1080P@30, 16 x 720P@30
Smart On： 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30, 16 x 720P@30
Support Ultra 265/H.265/H.264 video formats
Support mainstream cameras of ONVIF conformance (Profile S, Profile G, Profile T) and RTSP protocols
Support HDMI and VGA simultaneous output
Up to 12 Megapixels resolution recording
ANR technology to enhance the storage reliability when the network is disconnected
Support cloud upgrade

210,00 **175,00**

NVR501-16B



I1047

16-ch NVR
Rezolucija snimanja: 16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Ulazno/Izlazni saobraćaj: 80/64 Mbps
Video kompresija: Ultra 265/H.265/H.264
Video/audio izlazi: HDMI (4K) / HD, VGA
Smart Funkcije: Intrusion Detection, Cross Line Detection,Enter Area, Leave Area, Defocus Detection,Scene Change Detection, Object Left Behind, Object Removed,Auto Tracking, UMD(Ultra Motion Detection)
Statisticke analize: People counting
Dodatni ulazi: 1xRJ45 mrežni ulaz, 1xUSB 2.0, 1x USB 3.0
Mrežni protokoli: TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP,HTTPS, DNS, DDNS, SNMP, SMTP
Hard disk prostor: 1 sata HDD do 8TB kapaciteta
Opšte: Napajanje 12V DC, Potrošnja 15W bez HDD,
Radna temperatura: -10 °C ~ +55 °C,
Dimenzije: 260mm × 222mm × 47mm, Težina 0,98Kg

216,00 | 180,00

NVR501-16B-IQ



I1119

16-ch NVR
Decoding Capability: Smart Off: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
Smart On: 2 x 12MP@30, 2 x 4K@30, 6 x 4MP@30, 8 x 3MP@30, 12 x 1080P@30, 16 x 720P@30
Support Ultra H.265/H.265/H.264 video formats
Supports mainstream cameras of ONVIF conformance (Profile S, Profile G, Profile T) and RTSP protocols
Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
Support HDMI and VGA simultaneous output
Up to 16 Megapixels resolution recording
ANR technology to enhance the storage reliability When the network is disconnected
Support cloud upgrade
1 SATA Interface, up to 16 TB

228,00 | 190,00

NVR502-16B-IQ

NOVO



I1180

16-ch NVR
Decoding Capability: Smart Off: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
Smart On: 2 x 12MP@30, 2 x 4K@30, 6 x 4MP@30, 8 x 3MP@30, 12 x 1080P@30, 16 x 720P@30
Support Ultra H.265/H.265/H.264 video formats
Supports mainstream cameras of ONVIF conformance (Profile S, Profile G, Profile T) and RTSP protocols
Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
Support HDMI and VGA simultaneous output
Up to 16 Megapixels resolution recording
ANR technology to enhance the storage reliability When the network is disconnected
Support cloud upgrade
2 SATA Interface, up to 16 TB per HDD

264,00 | 220,00

NVR304-32X



I1154

32-ch NVR
32-KANALNI MREŽNI SNIMAČ
Rezolucija snimanja:
12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Ulazno/Izlazni saobraćaj: 384/384 Mbps
Video kompresija: Ultra 265, H.265, H.264 video kompresija,
Video/audio izlazi: HDMI1 (4K) / VGA I HDMI2 nezavisni izlazi, 1ch RCA
Smart Funkcije: Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking, Object left behind, Object removed, Face search, Behavior search
Statisticke analize: People counting
ONVIF conformance: Profile S, Profile G, Profile T
Dodatni ulazi: 2xRJ45 mrežni ulaz, 2xUSB 2.0, 1x USB 3.0, 1 x RS485, 1 x RS232, 16 x Alarmnih ulaza, 4 x Alarmnih izlaza
Mrežni protokoli: P2P, UPnP, NTP, DHCP, PPPoE
Hard disk prostor: 4 sata HDD do 10TB kapaciteta, RAID 1, 5
Opšte: Napajanje 12V DC, Potrošnja 25W bez HDD,
Radna temperatura: -10 °C ~ +55 °C,
Dimenzije: 442mm ×426mm× 89mm, Težina 5,7Kg

600,00 | 500,00

NVR502-32E-IX-G



2 HDDs 32-Ch Network Video Recorder
Support Ultra H.265/H.265/H.264 video formats
Support 32-channel input
Support 2-ch HDMI, 2-ch VGA. HDMI up to 4K (3840x2160) resolution
Support HDMI and VGA independent output
Support up to 16 Megapixels resolution recording
Support ANR technology to enhance the storage reliability when the network is disconnected
Support SeekFree function: up to 16-ch with 3rd party IPC, up to 32-ch With UNV SIP/UMD IPC
Support external USB keyboards
Support Video Metadata, Diverse Algorithms by NVR
Support cloud upgrade

1140,00 950,00

DOME IP KAMERE 2MPX

IPC3612LB-SF28-A





I1144

2MP Fixed IR Turret Network Camera
High quality image with 1080P, 1/2.8" CMOS sensor
1080P (1920 × 1080)@30/25 fps; 720P (1280 × 720)@30/25 fps
Ultra 265, H.265, H.264
Smart IR, up to 30 m (98.4 ft) IR distance
Day/night functionality
2D/3D DNR (digital noise reduction)
IP67 protection
Supports PoE power supply
3-axis

66,00 55,00

IPC322LB-SF28-A





I1174

2MP Vandal-resistant Network IR Fixed Dome Camera
High quality image with 2MP, 1/2.8"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264
Smart IR, up to 30m (98ft) IR distance
Day/night functionality
2D/3D DNR (Digital Noise Reduction)
IP67 protection
IK10 vandal resistant
Support PoE power supply
2-Axis

56,40 47,00

IPC322LB-AF28WK-G





I1008

2MP WIFI Fixed Dome Network Camera
High quality image with 2MP, 1/2.9"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
IK10 vandal resistant
IP67 protection
3-Axis

86,40 72,00

IPC322LB-DSF28K-G



I1177

High quality image with 2MP, 1/2.7"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
IK10 vandal resistant
IP67 protection
Support PoE power supply

72,00 60,00

IPC3622LE-ADF28K-WP



I1112

2MP ColorHunter Wise-ISP Fixed Warm Light Turret Network Camera
High quality image with 2MP, 1/2.7" CMOS sensor and F1.0 large aperture lens
2MP (1920 × 1080)@30/25 fps; 720P (1280 × 720)@30/25 fps
Ultra 265, H.265, H.264, MJPEG
Support ColorHunter with Wise-ISP technology, deeply optimizing color,
Detail, and smear effects in extremely low-light scenes
120 dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
White Light, up to 30 m (98 ft) warm light distance
Supports up to 512 GB Micro SD Card
IP67 protection
Support PoE power supply
3-Axis

104,40 87,00

IPC3612LE-ADF28KC-WL



I1038

2MP HD ColorHunter IR Fixed Eyeball Network Camera
High quality image with 2MP, 1/2.8"CMOS sensor
2MP (1920*1080) @30/25fps; 720P (1280*720) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic & Speaker
Smart IR, up to 30m (98ft) IR distance
White Light, up to 30m (98ft) white light distance
Supports 128 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

110,40 92,00

IPC3532LB-ADZK-G-BLACK



I1092

2MP HD IR VF (2.8 ~ 12mm) Dome Network Camera
High quality image with 2MP, 1/2.7"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 40m (131ft) IR distance
Supports 128 G Micro SD card
IK10 vandal resistant
IP67 protection
Support PoE power supply
3-Axis

156,00 130,00

BULLET IP KAMERE 2MPX

IPC2122LB-SF28-A



I1143

2MP Mini Fixed Bullet Network Camera
High quality image with 2MP, 1/2.8"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264
Smart IR, up to 30m (98ft) IR distance
Day/night functionality
2D/3D DNR (Digital Noise Reduction)
IP67 protection
Support PoE power supply
3-Axis

55,20 46,00

IPC2122LB-SF40-A





I1173

2MP Mini Fixed Bullet Network Camera
High quality image with 2MP, 1/2.8"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264
Smart IR, up to 30m (98ft) IR distance
Day/night functionality
2D/3D DNR (Digital Noise Reduction)
IP67 protection
Support PoE power supply
3-Axis

55,20 46,00

IPC2122LB-AF28WK-G





I1009

2MP HD WIFI Bullet Network Camera
High quality image with 2MP, 1/2.9"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
IP67 protection
3-Axis

78,00 65,00

IPC2122LB-AF40WK-G BLACK





I1093

2MP HD WIFI Bullet Network Camera
High quality image with 2MP, 1/2.9"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
IP67 protection
3-Axis

78,00 65,00

IPC2122LB-ADF40KM-G






I1175

2MP HD WDR Fixed IR Bullet Network Camera
High quality image with 2MP, 1/2.7"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
Support PoE power supply
3-Axis

72,00 60,00

IPC2122LB-AF28K-WL





I1050

2MP HD ColorHunter Mini Fixed Bullet Network Camera
High quality image with 2MP, 1/2.9"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra H.265,H.265, H.264
Built-in Mic
Warm Light, up to 30m (98ft) warm light distance
2D/3D DNR (Digital Noise Reduction)
Support 128GB Micro SD card
IP67 protection
Support PoE power supply
3-Axis

99,00 82,50

IPC2312LE-ADF28KM-WP



I1111

2MP ColorHunter with Wise-ISP Fixed Bullet Network Camera
High quality image with 2MP, 1/2.7"CMOS sensor and F1.0 large aperture lens
2MP (1920*1080) @30/25fps; 720P (1280*720) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
Colorhunter with Wise-ISP technology ensures 24-hour full-color images
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
White Light, up to 30m warm light distance
Supports 512 GB Micro SD card
IP67 protection
Support PoE power supply
3-Axis

104,40 87,00

IPC2122LE-ADF28KMC-WL



I1028

2MP HD ColorHunter Mini IR Fixed Bullet Network Camera
High quality image with 2MP, 1/2.8"CMOS sensor
2MP (1920*1080) @30/25fps; 720P (1280*720) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic & Speaker
Smart IR, up to 30m (98ft) IR distance
White Light, up to 30m (98ft) white light distance
Supports 128 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

110,40 92,00

BULLET IP KAMERE 3MPX

IPC2123LB-AF28KM-G



I1037

3MP HD Fixed IR Bullet Network Camera
High quality image with 3MP, 1/2.7"CMOS sensor
3MP (2304*1296)@30/25fps; 2MP (1920*1080)@30/25fps;
Ultra 265, H.265, H.264, MJPEG
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

86,40 72,00

DOME IP KAMERE 4MPX

IPC3614LB-SF28-A



I1030

4MP Fixed Dome Network Camera
High quality image with 4MP, 1/3"CMOS sensor
4MP (2560*1440)@25/20fps; 3MP (2304*1296)@30/25fps; 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart IR, up to 30m (98ft) IR distance
Support PoE power supply
3-Axis

81,60 68,00

IPC3614LB-AF28K-A2

NOVO



I1178

4MP IR Eyeball Network Camera
High quality image with 4 MP, 1/3.0" CMOS sensor
4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
Supports accurate human body detection 2.0
Ultra 265, H.265, H.264
Built-in mic
Smart IR, up to 30 m (98.4 ft) IR distance
Day/night functionality
2D/3D DNR (digital noise reduction)
MicroSD, up to 512 GB
DC 12 V, PoE (IEEE 802.3af) power supply
IP67 protection
3-axis

86,40 72,00

IPC324LB-AF28K-A2



I1010

4MP Fixed IR Dome Network Camera
High quality image with 4 MP, 1/3.0" CMOS sensor
4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
Supports accurate human body detection 2.0
Ultra 265, H.265, H.264
Built-in mic
Smart IR, up to 30 m (98.4 ft) IR distance
Day/night functionality
2D/3D DNR (digital noise reduction)
MicroSD, up to 512 GB
DC 12 V, PoE (IEEE 802.3af) power supply
IP67 protection
IK10 vandal resistant
2-axis

86,40 | 72,00

IPC3624LE-ADF28K-WP



I1086

4MP ColorHunter Wise-ISP Fixed Warm Light Turret Network Camera
High quality image with 4MP, 1/1.8"CMOS sensor and F1.0 large aperture lens
4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Support ColorHunter with Wise-ISP technology, deeply optimizing color, detail,
And smear effects in extremely low-light scenes
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
White Light, up to 30m (98ft) warm light distance
Supports 512 GB Micro SD card
IP67 protection
Support PoE power supply
3-Axis

128,40 | 107,00

IPC3524LE-ADF28K-WP



I1084

4MP ColorHunter Wise-ISP Fixed Dome Network Camera
High quality image with 4MP, 1/1.8"CMOS sensor and F1.0 large aperture lens
4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps;
3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Support ColorHunter with Wise-ISP technology, deeply optimizing color,
detail, and smear effects in extremely low-light scenes
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Supports 512 GB Micro SD card
IP67 protection
IK10 protection
Support PoE power supply
3-Axis

128,40 | 107,00

IPC3614LE-ADF28K-H



I1137

4MP EasyStar Fixed IR Turret Network Camera
High quality image with 4MP, 1/3" CMOS sensor
4MP (2688 × 1520)@25/20 fps; 4MP (2560 × 1440)@25/20 fps; 3MP (2304 × 1296)@30/25 fps; 2MP (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG
Easystar technology ensures high image quality in low illumination environment
120 dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 30 m (98 ft) IR distance
Supports up to 512 GB Micro SD Card
IP67 protection
Support PoE power supply
3-Axis

147,60 | 123,00

IPC3614LE-ADF28KC-WL



I1040

4MP HD ColorHunter IR Fixed Eyeball Network Camera
High quality image with 4MP, 1/3"CMOS sensor
4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps;
3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic & Speaker
Smart IR, up to 30m (98ft) IR distance
White Light, up to 30m (98ft) white light distance
Supports 128 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

150,00 | 125,00

IPC3614SB-ADF28KMC-I0





I1194

4MP HD Intelligent Light and Audible Warning Fixed Eyeball Network Camera
High quality image with 4MP, 1/2.7"CMOS sensor
4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Supports sound and light alarm linkage.When Smart intrusion prevention is triggered The camera links sound alarm and light linkage.
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic and Speaker
Smart IR, up to 30m (98ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply

156,00 130,00

IPC3614SB-ADF40KMC-I0





I1094

4MP HD Intelligent Light and Audible Warning Fixed Eyeball Network Camera
High quality image with 4MP, 1/2.7"CMOS sensor
4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Supports sound and light alarm linkage.When Smart intrusion prevention is triggered , the camera links sound alarm and light linkage.
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic and Speaker
Smart IR, up to 30m (98ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply

156,00 130,00

IPC354SB-ADNF28K-I0





i1087

4MP LightHunter Fixed IR Dome Network Camera
High quality image with 4MP, 1/2.7"CMOS sensor
4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps;
3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and,
Motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 30m (98 ft) IR distance
Supports 512 G Micro SD card
Cable-free
Support PoE power supply

180,00 150,00

IPC3534LB-ADZK-G





I1166

4MP HD IR VF (2.8 ~ 12mm) Dome Network Camera
High quality image with 4MP, 1/3"CMOS sensor
4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296)@ 30/25fps;2MP (1920*1080)@30/25fps
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 40m (131ft) IR distance
Supports 256 G Micro SD card
IK10 vandal resistant
IP67 protection
Support PoE power supply
3-Axis

180,00 150,00

BULLET IP KAMERE 4MPX

IPC2124LB-SF28-A



I1011

4MP Fixed IR Mini Bullet Network Camera
High quality image with 4MP, 1/3.0"CMOS sensor
4MP (2560*1440)@25/20fps; 3MP (2304*1296)@25/20fps; 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
H.265, H.264
Smart IR, up to 30m (98ft) IR distance
Day/night functionality
2D/3D DNR (Digital Noise Reduction)
IP67 protection
DC12V or PoE(IEEE 802.3af) power supply
3-Axis

81,60 | 68,00

IPC2124LB-SF40-A



I1081

4MP Fixed IR Mini Bullet Network Camera
High quality image with 4MP, 1/3.0"CMOS sensor
4MP (2560*1440)@25/20fps; 3MP (2304*1296)@25/20fps; 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
H.265, H.264
Smart IR, up to 30m (98ft) IR distance
Day/night functionality
2D/3D DNR (Digital Noise Reduction)
IP67 protection
DC12V or PoE(IEEE 802.3af) power supply
3-Axis

84,00 | 70,00

IPC2124LB-AF28K-A2



I1155

4MP Fixed IR Bullet Network Camera
High quality image with 4 MP, 1/3.0" CMOS sensor
4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
Supports accurate human body detection 2.0
Ultra 265, H.265, H.264
Built-in mic
Smart IR, up to 30 m (98.4 ft) IR distance
Day/night functionality
2D/3D DNR (digital noise reduction)
MicroSD, up to 512 GB
DC 12 V, PoE (IEEE 802.3af) power supply
IP67 protection
3-axis

86,40 | 72,00

IPC2124LB-ADF28KM-H



I1068

4MP Mini Fixed Bullet Network Camera
High quality image with 4MP, 1/2.9"CMOS sensor
4MP (2560*1440)@25/20fps; 3MP (2304*1296)@30/25fps;
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
Support PoE power supply
120dB WDR
3-Axis

114,00 | 95,00

IPC2124LB-ADF40KM-H



I1075

4MP Mini Fixed Bullet Network Camera
High quality image with 4MP, 1/2.9"CMOS sensor
4MP (2560*1440)@25/20fps; 3MP (2304*1296)@30/25fps;
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Built-in Mic
Ultra 265, H.265, H.264, MJPEG
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
Support PoE power supply
120dB WDR
3-Axis

116,40 | 97,00

IPC2314LE-ADF28KM-WP 	I1085	**4MP ColorHunter with Wise-ISP Fixed Bullet Network Camera** High quality image with 4MP, 1/1.8"CMOS sensor and F1.0 large aperture lens 4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps; Ultra 265, H.265, H.264, MJPEG Colorhunter with Wise-ISP technology ensures 24-hour full-color images 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic White Light, up to 30m warm light distance Supports 512 GB Micro SD card IP67 protection Support PoE power supply 3-Axis	128,40	107,00
IPC2314LE-ADF40KM-WP 	I1184	**4MP ColorHunter with Wise-ISP Fixed Bullet Network Camera** High quality image with 4MP, 1/1.8"CMOS sensor and F1.0 large aperture lens 4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps; Ultra 265, H.265, H.264, MJPEG Colorhunter with Wise-ISP technology ensures 24-hour full-color images 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic White Light, up to 30m warm light distance Supports 512 GB Micro SD card IP67 protection Support PoE power supply 3-Axis	128,40	107,00
IPC2124LE-ADF28KMC-WL 	I1148	**4MP ColorHunter Fixed Bullet Network Camera** High quality image with 4 MP, 1/3.0" CMOS sensor 4 MP (2688 × 1520)@25/20 fps; 4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps Ultra 265, H.265, H.264, MJPEG 120 dB true WDR technology enables clear image in strong light scene Supports 9:16 corridor mode Built-in mic and speaker Smart IR, up to 30 m (98.4 ft) IR distance White light, up to 30 m (98.4 ft) white light distance MicroSD, up to 512 GB IP67 protection Supports PoE power supply 3-axis	132,00	110,00
IPC2124LE-ADF28KM-G 	I1027	**4MP HD Mini IR Fixed Bullet Network Camera** High quality image with 4MP, 1/3"CMOS sensor 4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps; Ultra 265, H.265, H.264, MJPEG Easystar technology ensures high image quality in low illumination environment 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic Smart IR, up to 50m (164ft) IR distance Supports 256 G Micro SD card IP67 protection Support PoE power supply 3-Axis	147,60	123,00
IPC2314LE-ADF28KM-WL 	I1029	**4MP HD ColorHunter Fixed Bullet Network Camera** High quality image with 4MP, 1/1.8"CMOS sensor and F1.0 large aperture lens 4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps; Ultra 265, H.265, H.264, MJPEG Colorhunter technology ensures 24-hour full-color images 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic White Light, up to 30m white light distance Supports 128 GB Micro SD card IP67 protection Support PoE power supply 3-Axis	159,60	133,00

IPC2124SB-ADF28KM-I0






I1088

4MP HD Intelligent LightHunter IR Fixed Bullet Network Camera
High quality image with 4MP, 1/3"CMOS sensor
4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
LightHunter technology ensures ultra-high image quality in low illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 40m (131ft) IR distance
Supports 512 G Micro SD card
IP67 protection
Support PoE power supply

162,00 135,00

IPC2314SB-ADF60KM-I0





I1097

4MP HD Intelligent 80m IR Fixed Bullet Network Camera
High quality image with 4MP, 1/2.7"CMOS sensor
4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle
And non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in 2 Mic
Smart IR, up to 80m (262 ft) IR distance
Supports 256 G Micro SD card
IP67 protection

192,00 160,00

IPC2314SB-ADF40KM-I0





I1167


4MP LightHunter Fixed IR Bullet Network Camera
High quality image with 4MP, 1/2.7"CMOS sensor
4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in 2 Mic
Smart IR, up to 80m (262 ft) IR distance
Supports 512 G Micro SD card
IP67 protection

192,00 160,00

IPC2324LE-ADZK-DL3

NOVO





I1193

4MP WDR Bullet Varifocal Network Camera
High quality image with 4 MP, 1/3.0" CMOS sensor
4 MP (2688 × 1520)@25/20 fps; 4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG (Sub Stream Only)
Wise-ISP technology ensures 24-hour full-color images
Support cross line, intrusion detection (based on human body detection)
Support ultra motion detection (human/ vehicle detection)
120 dB true WDR technology enables clear image in strong light scene
Built in mic
Supports 9:16 corridor mode
Smart IR, up to 50 m (164.0 ft) IR distance
Warm light, up to 50 m (164.0 ft) warm light distance
IP67 protection
MicroSD, up to 512 G

198,00 165,00

PKC2640@Z28-IR-P



4MP Recognition Of Vehicle License Plate **Bullet IP Camera (2.8 ~ 12mm)**

Features
Optics
Built-in lens supports motorized zoom to adapt to different scenes and allows for easy installation.
Automatic gain control, white balance, and WDR for various light conditions.
Compression
Supports triple streams.
Advanced H.265 encoding technology improves compression efficiency.
Custom OSD allows various vehicle information to be overlaid on the video image.
Functions
Built-in vehicle and license plate recognition algorithm can recognize
standard license plates of multiple countries.
Supports capturing vehicle head only.
Supports plate allowlist and blocklist configuration.
Supports vehicle access control when connected to a barrier.
Supports Micro SD cards of up to 256GB.
Automatic network replenishment (ANR) allows to automatically
store video to SD card in case of network disconnection.
Supports audio collection and intercom.

I1120 Network 840,00 700,00

Network auto-adaptability ensures smooth live video in relatively bad
network conditions such as packet loss.
Supports SNMP.
Supports UNP for NAT traversal between public and private networks.
Supports integration with the third party via SDK or HTTP.
Network Security
Supports authorized user access by password. Weak password
detection and account lock-up when failed login attempts reach the
Upper limit enhance password security.
Supports Web access via HTTPS.
RTSP authentication prevents unauthorized video stream requests.
IP address filtering prevents illegal access from untrusted IP addresses.
Gateway ARP protection prevents MAC address spoofing.
Structure
Supports DC 12V and PoE (802.3at) power supplies.
Cast aluminum body offers excellent heat dissipation.
3-axis mounting bracket for various installation scenarios.
A junction box on the mounting bracket is convenient for storing tail cables.
IP67 and IK10 protection.



DOME IP KAMERE 5MPX

IPC3615LB-SF28-A




5MP Fixed IR Turret Network Camera

High quality image with 5 MP, 1/3.0" CMOS sensor
5 MP (2592 × 1944)@20 fps; 4 MP (2560 × 1440)@20 fps;
3 MP (2304 × 1296)@20 fps; 1080P (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG

I1147 Smart IR, up to 30 m (98.4 ft) IR distance 86,40 72,00

Day/night functionality
2D/3D DNR (digital noise reduction)
IP67 protection
DC 12 V, PoE (IEEE 802.3af) power supply
3-axis



IPC3635LB-ADZK-G



5MP HD IR VF Eyeball Network Camera

High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 25/20fps; 4MP (2560*1440)@ 25/20fps;
3MP (2304*1296)@ 30/25fps;2MP (1920*1080)@30/25fps
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene

I1139 Support 9:16 Corridor Mode 192,00 160,00

Built-in Mic
Smart IR, up to 40m (131ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis



IPC3615SS-ADF28K-I1

PRIME





I1105

5MP HD Intelligent LightHunter IR Fixed Turret Dome Network Camera
High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 30/25(default)fps; 4MP (2560*1440)@ 30/25fps;
3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Intelligent perimeter protection, include cross line, intrusion, enter area,
leave area detection
Based on target classification, smart intrusion prevention significantly
reduce false alarm caused by leaves, birds and lights etc., accurately
focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
Auto Scene Match (ASM) (WDR only)
LightHunter technology ensures ultra-high image quality in low
Illumination environment
130dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 40m (131ft) IR distance
Supports 256 G Micro SD card
IP67 protection

192,00 160,00

IPC3615SE-ADF28KM-WL-I0

PRIME





I1161

5MP HD Intelligent ColorHunter Fixed Eyeball Network Camera
High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@30/25fps; 4MP (2560*1440)@30/25fps;3MP (2304*1296)@30/25fps; 2MP
(1920*1080)@30/25fps;
Ultra 265, H.265, H.264, MJPEG
Intelligent perimeter protection, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce
False alarm caused by leaves,
Birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
Colorhunter technology ensures 24-hour full-color images
120dB true WDR technology enables clear image in strong light scene
Support 9:16 corridor Mode
Support built-in Mic
Support 256 G Micro SD card
IP67 protection
Support PoE power supply

237,00 197,50

BULLET IP KAMERE 5MPX

IPC2125LB-SF28-A

EASY





I1145

5MP Fixed IR Bullet Network Camera
High quality image with 5 MP, 1/3.0" CMOS sensor
5 MP (2592 × 1944)@20 fps; 4 MP (2560 × 1440)@20 fps;
3 MP (2304 × 1296)@20 fps; 1080P (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG
Smart IR, up to 30 m (98.4 ft) IR distance
Day/night functionality
2D/3D DNR (digital noise reduction)
IP67 protection
DC 12 V, PoE (IEEE 802.3af) power supply
3-axis

86,40 72,00

IPC2125LB-SF40-A

EASY





I1146

5MP Fixed IR Bullet Network Camera
High quality image with 5 MP, 1/3.0" CMOS sensor
5 MP (2592 × 1944)@20 fps; 4 MP (2560 × 1440)@20 fps;
3 MP (2304 × 1296)@20 fps; 1080P (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG
Smart IR, up to 30 m (98.4 ft) IR distance
Day/night functionality
2D/3D DNR (digital noise reduction)
IP67 protection
DC 12 V, PoE (IEEE 802.3af) power supply
3-axis

86,40 72,00

IPC2125LE-ADF28KM-G

EASYSTAR





I1041


5MP HD Mini IR Fixed Bullet Network Camera
High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 25/20fps; 4MP (2560*1440)@ 25/20fps;
3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
IC domet: do 50m
Easystar technology ensures high image quality in low illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 50m (164ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

159,60 133,00

IPC2125SB-ADF40KMC-I0

PRIME





I1095


5MP HD Intelligent Light and Audible Warning Fixed Bullet Network Camera
High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Supports sound and light alarm linkage.When Smart intrusion prevention is triggered, The camera links sound alarm and light linkage.
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic and Speaker
Smart IR, up to 30m (98ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply

168,00 140,00

IPC2125SB-ADF28KM-I0

PRIME





I1110


5MP LightHunter Fixed IR Bullet Network Camera
High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 30/25fps; 4MP (2560*1440)@ 30/25fps;
3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
LightHunter technology ensures ultra-high image quality in low Illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 40m (131ft) IR distance
Supports 512 G Micro SD card
IP67 protection
Support PoE power supply

168,00 140,00

IPC2125SB-ADF28KM-I0 BLACK

PRIME






I1106

5MP LightHunter Fixed IR Bullet Network Camera
High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 30/25fps; 4MP (2560*1440)@ 30/25fps;
3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
LightHunter technology ensures ultra-high image quality in low Illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 40m (131ft) IR distance
Supports 512 G Micro SD card
IP67 protection
Support PoE power supply

168,00 140,00

IPC2125SB-ADF28KMC-I0





I1156

5MP Tri-Guard Fixed Dual-light Bullet Network Camera
High quality image with 5 MP, 1/2.7" CMOS sensor
5 MP (2880 × 1620)@30/25 fps; 4 MP (2560 × 1440)@30/25 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, including cross line, intrusion, enter area, leave area detection
Intelligent intrusion prevention system based on target classification significantly reduces false alarms caused by leaves, birds, and lights, accurately focusing on humans, vehicles, and non-motor vehicles
Supports sound and light alarm linkage. When smart intrusion prevention is triggered, the camera links sound alarm and light linkage
120 dB true WDR technology enables clear image in strong light scene
Supports 9:16 corridor mode
Built-in mic and speaker
Smart IR, up to 30 m (98.4 ft) IR distance
MicroSD, up to 512 GB
IP67 protection
Supports PoE power supply

168,00 | 140,00

IPC2325LB-ADZK-H





I1069

5MP HD IR VF (2.8 ~ 12mm) Bullet Network Camera
High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;
Built-in Mic
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Smart IR, up to 50m (164ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

192,00 | 160,00

IPC2315SB-ADF40KM-I0






I1096

5MP LightHunter Fixed IR Bullet Network Camera
High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor Vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in 2 Mic
Smart IR, up to 80m (262 ft) IR distance
Supports 512 G Micro SD card
IP67 protection

198,00 | 165,00

IPC2225SE-DF40K-WL-I0





I1158

5MP ColorHunter Fixed Warm Light Bullet Network Camera
High quality image with 5 MP, 1/2.7" CMOS sensor
5 MP (2880 × 1620)@30/25 fps; 4 MP (2560 × 1440)@30/25 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG
Intelligent perimeter protection, including cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduces false alarm caused by leaves, birds and lights, accurately focusing on human, motor vehicle and non-motor vehicle
Intelligent people flow counting and crowd density monitoring
ColorHunter technology ensures 24-hour full-color images
120 dB true WDR technology enables clear image in strong light scene
Supports 9:16 corridor mode
Alarm I/O: 1/1, audio I/O: 1/1
MicroSD, up to 512 GB
IK10 vandal resistant and IP67 protection
Supports PoE power supply

261,60 | 218,00

DOME IP KAMERE 8MPX

IPC328SB-ADF28K-I0






I1043

8MP HD Intelligent IR Fixed Dome Network Camera
High quality image with 8MP, 1/2.7"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps;
4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Intelligent perimeter protection, include cross line, intrusion,
enter area, leave area detection
Based on target classification, smart intrusion prevention significantly
reduce false alarm caused by leaves, birds and lights etc., accurately
focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Alarm:1 in/1 out, Audio: 1 in/1 out
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 256 G Micro SD card
IK10 vandal resistant and IP67 protection

229,20 | 191,00

IPC3618LE-ADF28K-G





I1162

4K HD IR Fixed Eyeball Network Camera
High quality image with 8MP, 1/2.7"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps; 4MP (2560*1440)@30/25fps; 2MP (1920*1080)
@30/25fps
Ultra 265, H.265, H.264, MJPEG
Easystar technology ensures high image quality in low illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

216,00 | 180,00

BULLET IP KAMERE 8MPX

IPC2318LE-ADF28KM-WP





I1113

8MP ColorHunter Wise-ISP Warm Light Bullet Network Camera
High quality image with 8MP, 1/1.8"CMOS sensor and F1.0 large aperture lens
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps; 4MP (2560*1440)@30/25fps; 2MP (1920*1080)
@30/25fps
Ultra 265, H.265, H.264, MJPEG
Colorhunter with Wise-ISP technology ensures 24-hour full-color images
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
White Light, up to 30m warm light distance
Supports 512 GB Micro SD card
IP67 protection
Support PoE power supply
3-Axis

210,00 | 175,00

IPC2128LE-ADF28KM-G






I1012

4K 8MP Mini Fixed Bullet Network Camera
High quality image with 8MP, 1/2.7"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps; 4MP (2560*1440)@30/25fps; 2MP (1920*1080)
@30/25fps
Ultra 265, H.265, H.264, MJPEG
Easystar technology ensures high image quality in low illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 50m (164ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

211,20 | 176,00

IPC2128SB-ADF28KMC-I0





I1090

8MP Tri-Guard Fixed Dual-light Bullet Network Camera
High quality image with 8MP, 1/2.7"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps; 4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Built-in Speaker
Smart IR, up to 30m (98ft) IR distance
Supports 512 G Micro SD card
IP67 protection

246,00 | 205,00

IPC2328SB-DZK-I0





I1138

8MP HD Intelligent LighterHunter IR VF (2.8 ~ 12mm) Bullet Network Camera
High quality image with 8MP, 1/2.8"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps;
4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion,
enter area, leave area detection
Based on target classification, smart intrusion prevention
significantly reduce false alarm caused by leaves,
Birds and lights etc., accurately focus on human and,
motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
LightHunter technology ensures ultra-high image
Quality in low illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Alarm:1 in/1 out, Audio: 1 in/1 out
Smart IR, up to 50m (164ft) IR distance
Supports 256 G Micro SD card
IK10 vandal resistant
IP67 protection
Support PoE power supply

264,00 | 220,00

IPC2328SB-ADZKM-DL-I1







I1192


8MP Dual-light Varifocal Bullet Network Camera
High quality image with 8 MP, 1/2.7" CMOS sensor
8 MP (3840 × 2160)@25/24 fps; 5 MP (3072 × 1728)@30/25 fps; 4 MP (2560 × 1440)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, including cross line, intrusion, enter area, leave area detection
Intelligent intrusion prevention system based on target classification significantly reduces false alarms caused by leaves, birds, and lights, accurately focusing on humans, vehicles, and non-motor vehicles
Support ultra motion detection
Intelligent people flow counting and crowd density monitoring
120 dB true WDR technology enables clear image in strong light scene
Supports 9:16 corridor mode
Alarm I/O: 1/1, audio I/O: 1/1
MicroSD, up to 512 GB
IK10 vandal resistant and IP67 protection

420,00 | 350,00

Uniarch

Uho-S2






I1091

High quality image with 2MP, 1/3"CMOS sensor
2MP (1920*1080)@25/20fps; 720P (1280*720) @25/20fps
Ultra 265, H.265, H.264
Built-in Mic & Speaker, support two-way audio, offer better interaction
IR night vision, up to 10m (33ft) IR distance
Support 256 G Micro SD card
Wi-Fi connection and easy installation

36,00 | 30,00

Uho-S3E-M3





I1051	High quality image with 3MP, 1/3"CMOS sensor 3MP (2304*1296)@25/20fps; 2MP (1920*1080)@30/25fps;720P (1280*720) @30/25/fps Ultra 265, H.265, H.264 Built-in Mic & Speaker, support two-way audio,offer better interaction IR night vision, up to 10m (33ft) IR distance Support 256 G Micro SD card Wi-Fi connection and easy installation	42,00	35,00

IPC-B122-APF28





I1140	High quality image with 1080P, 1/2.9" CMOS sensor 1080P (1920 × 1080)@25/20 fps; 720P (1280 × 720)@25/20 fps Ultra 265, H.265, H.264 2D/3D DNR (digital noise reduction) ROI (region of interest) ensures image quality in areas of interest With low bandwidth Smart IR, up to 30 m (98.4 ft.) IR distance Built-in mic Wide temperature range: -30 ℃ to 60 ℃ (-22 ℉ to 140 ℉) DC 12 V, PoE (IEEE 802.3af) power supply	43,20	36,00

IPC-T122-APF28





I1141	High quality image with 1080P, 1/2.8" CMOS sensor 1080P (1920 × 1080)@25 fps; 720P (1280 × 720)@25 fps Ultra 265, H.265, H.264 2D/3D DNR (digital noise reduction) ROI (region of interest) ensures image quality in areas of Interest with low bandwidth Smart IR, up to 30 m (98.4 ft.) IR distance Built-in mic Wide temperature range: -30 ℃ to 60 ℃ (-22 ℉ to 140 ℉) DC 12 V, PoE (IEEE 802.3af) power supply	43,20	36,00

Uho-B1R-M2F3





I1127	High quality image with 2MP, 1/2.9"CMOS sensor 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps Ultra 265, H.265, H.264, MJPEG Built-in Mic Smart IR, up to 30m (98ft) IR distance Supports 128 G Micro SD card IP67 protection 3-Axis	51,60	43,00

IPC-B125-APF28






I1142	High quality image with 5 MP, 1/3.0" CMOS sensor 5 MP (2592 × 1944)@20 fps; 4 MP (2560 × 1440)@20 fps; 3 MP (2304 × 1296)@20 fps; 1080P (1920 × 1080)@30 fps; 720P (1280 × 720)@30 fps; D1 (720 × 576)@30 fps Ultra 265, H.265, H.264 2D/3D DNR (digital noise reduction) ROI (region of interest) ensures image quality in areas Of interest with low bandwidth Smart IR, up to 30 m (98.4 ft.) IR distance Built-in mic Wide temperature range: -30 ℃ to 60 ℃ (-22 °F to 140 °F) DC 12 V, PoE (IEEE 802.3af) power supply	60,00	50,00

Uho-P1A-M3F4D





I1052	High quality image with 3MP, 1/2.8"CMOS sensor 2304*1296@20fps in the main stream Ultra 265, H.265, H.264 Support digital WDR (Wide Dynamic Range) Built-in Mic & Speaker, support two-way audio, offer better interaction Support sound and light warning, makes warning and alarming more noticeable Smart IR, up to 30 m (98 ft) IR and 10m (33 ft) warm light distance, Suitable for more scenes Self-contained bracket, support two kinds of mounting Supports 256 GB Micro SD card Wi-Fi connection and easy installation IP66 ingress protection The front face is made of grapheme, which has better heat dissipation and more Environmental protection	68,40	57,00

Uho-P2S-M33F34






I1128	Fixed camera and PTZ camera integration, dual channels with one IP, Look at overall situation and consider details at the same time Ultra 265, H.265, H.264 Support digital WDR (Wide Dynamic Range) Built in Mic Speaker, support two way audio, offer better interaction Support sound and light warning, makes warning and alarming more noticeable Smart IR, up to 30 m (98 ft) IR and 10m (33ft) warm light distance, suitable for more scenes IR warm light illumination to deal with different scenes and achieve full color illumination Supports 512 GB Micro SD card Wi Fi connection and easy installation IP66 ingress protection	118,80	99,00

PTZ IP KAMERE

IPC6312LR-AX4-VG





I1073	2MP **LightHunter IR Network PTZ Camera** High quality image with 2MP, 1/2.7"CMOS sensor Ultra 265, H.265, H.264, MJPEG Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection People Counting, support people flow counting and crowd density monitoring, suitable for different statistical scenarios LightHunter technology ensures ultra-high image quality in Low illumination environment Up to 120 dB Optical WDR (Wide Dynamic Range) Built-in Mic & Speaker Smart IR, Up to 50 m (164 ft) IR distance Micro SD, up to 256GB IP66 protection DC12V or PoE (IEEE 802.3af) power supply	255,00	212,50

IPC675LFW-AX4DUPKC-VG





I1109

5MP LightHunter Active Deterrence Mini PTZ Camera
High quality image with 5MP, 1/2.7"CMOS sensor
Ultra 265, H.265, H.264, MJPEG
LightHunter technology ensures ultra-high image quality in low illumination environment
Up to 120 dB Optical WDR (Wide Dynamic Range)
Built-in Mic & Speaker
Smart IR, Up to 50 m (164 ft) IR distance and 10m (33 ft) warm light distance
Micro SD, up to 256GB
IP66 protection
DC12V or PoE (IEEE 802.3af) power supply

270,00 225,00

IPC6412LR-X5UPW-VG







I1157

2MP 5X LightHunter Wi-Fi IR Network Mini PTZ Camera
High quality image with 1080P, 1/2.7" CMOS sensor
1920 × 1080@30 fps in the main stream
Ultra 265, H.265, H.264, MJPEG
5X optical zoom allows for closer viewing of subjects
Smart intrusion prevention, supports false alarm filtering, including cross line, intrusion, enter area, leave area detection
automatic selection of best snapshots
LightHunter technology ensures ultra-high image quality in low illumination environment
Up to 120 dB optical WDR (wide dynamic range)
Wi-Fi connection and easy installation
Built-in mic and speaker, supports two-way audio
Alarm I/O: 1/1
Smart IR, up to 30 m (98.4 ft) IR distance

228,00 190,00

IPC6412LR-X16-VG





I1074

2MP 16x LightHunter Network PTZ Dome Camera
High quality image with 2MP,1/2.8" CMOS sensor
1920*1080@30fps in the main stream
Ultra 265, H.265, H.264, MJPEG
16X optical zoom allows for closer viewing of subjects
LightHunter technology ensures ultra-high image quality
In low illumination environment
Smart IR, up to 100m (328ft) IR distance
Micro SD, up to 256GB
DC 12V±25% or PoE+ (IEEE 802.3at)
IP66 ingress protection

396,00 330,00

IPC6424SR-X25--B






I1152

4MP 25x LightHunter IR Network PTZ Camera
High quality image with 4 MP, 1/2.8" CMOS sensor
2688 × 1520@30 fps in the main stream
Ultra 265, H.265, H.264, MJPEG
25X optical zoom
Smart intrusion prevention, supports false alarm filtering, including cross line, intrusion, enter area, leave area detection
automatic selection of best snapshots, supports face detection masked area
People counting, supports people flow counting and crowd density monitoring, suitable for different statistical scenarios
LightHunter technology ensures ultra-high image quality in low illumination environment
Smart IR, up to 100 m (328 ft) IR distance
DC 12 V±25%, PoE+ (IEEE 802.3at)
Alarm I/O: 2/1, audio I/O: 1/1
IP67 ingress protection
IK10 vandal resistant

636,00 530,00

IPC6634S-X33-VF

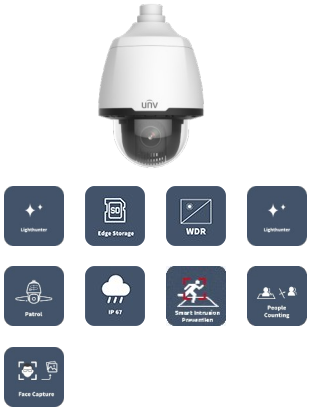

I1153

4MP 33X LightHunter IR Network PTZ Camera
High quality image with 4 MP, 1/2.8" CMOS sensor
2688 × 1520@30 fps in the main stream
Ultra 265, H.265, H.264, MJPEG
33X optical zoom
Smart intrusion prevention, supports false alarm filtering,
including cross line, intrusion, enter area, leave area detection
automatic selection of best snapshots, supports face detection masked area
People counting, supports people flow counting and crowd density monitoring,
Suitable for different statistical scenarios
LightHunter technology ensures ultra-high image quality in low illumination environment
AC 24 V±25%, DC 24 V±25%, PoE+ (IEEE802.3 at)
Alarm I/O: 7/2, audio I/O: 1/1
IP67 ingress protection
IK10 vandal resistant

1320,00 1100,00

VIDEO INTERFONI

OEU-201B-HMK-W



I1201

Outdoor Station
Front panel: Plastic cement
Supports batch configuration
Supports intercom calls to associated indoor units or APPs
Support monitoring function, security alarm, tamper alarm
Support Wi-Fi
Built-in IC card reader
Card Capacity 2000
IP65(Apply silica gel to gaps between the device and the wall)

216,00 180,00

OEU-202S-HMK2



I1202

Outdoor Station
Front panel: Metal
Vandal-resistant: IK08
Supports batch configuration
WDR: Digital
Built-in IC card reader
Card Capacity 10000
IP65(Apply silica gel to gaps between the device and the wall)

252,00 210,00

OEU-202S-HMK4



I1204

Outdoor Station
Front panel: Metal
Vandal-resistant: IK08
Supports batch configuration
WDR: Digital
Built-in IC card reader
Card Capacity 10000
IP65(Apply silica gel to gaps between the device and the wall)

276,00 230,00

OEU-301S-HMKA



I1301

Outdoor Station
Front panel: Metal
Vandal-resistant: IK08
Supports batch configuration
WDR: Digital
Built-in IC card reader
Card Capacity 10000
Alarm Output: 2
IP65(Apply silica gel to gaps between the device and the wall)

420,00 350,00

EP-CS201



I1203	Wall Mount Sunshield Compatible with OEU-201B-HMK-W, OEU-201B-HMK-W-NB, OEU-201S-HMK-W, And OEU-201S-HMK-W-NB villa door stations	18,00	15,00

OEI-372S-H-W



I1372	Indoor Station Rugged ABS casing and glass panel. 1024*600 HD touch screen. Batch configuration transfer. Remote opening of linked door stations, one-key opening. Network camera monitoring, security alarm	192,00	160,00

KIT/201S/372S/NSW2020



I1205	OEU-201S-HMK-W Metal casing. Supports call and intercom with the connected indoor station and app. Supports security protection alarm and tamper alarm triggered by door magnet, infrared, etc. Supports Wi-Fi. Built-in IC card reader. OEI-372S-H-W ABS casing and glass panel, solid and durable. Supports Wi-Fi. Supports touchscreen operation. 1024 x 600 HD screen. Supports remote door opening by sending signal to the door station. Allows to view live video of connected door stations and network cameras. NSW2020-6T-POE-IN Allows to switch operating modes, including Default, VLAN, and Extend. Supports VLAN isolation. All PoE ports are isolated from each other and only able to communicate with uplink ports. Supports network extension. With a high-quality network cable and IPC, the network transmission distance can reach up to 250 meters by lowering the network port rate to 10Mbps. Supports port priority. Packets from high-priority ports will be forwarded first. Supports flow control. When there is data congestion in the uplink ports, the switch will actively send flow control frames to PoE ports. Plug-and-play, simple and convenient. All metal casing, secure and reliable.	360,00	300,00

HARD DISKOVI

WD GREEN 320 GB



Western Digital, 320GB GREEN, 7200RPM, SATA III, 32MB	KONTAKT	

WD GREEN 500 GB



Western Digital,500GB GREEN, 7200RPM, SATA III, 32MB	KONTAKT	

WD GREEN 1 TB



Western Digital, 1 TB GREEN, 7200RPM, SATA III, 32MB	KONTAKT	

HDD 1TB WD11PURZ-85C5HY0



I1100	Western Digital, 1TB Purple, IntelliPower, SATA III, 64MB	160,80	134,00

HDD 2TB WD23PURZ-85C5HY0



I1200	Western Digital, 2TB Purple, IntelliPower, SATA III, 64MB	198,00	165,00

HDD 4TB WD44PURZ-85CPDY0



I1400	Western Digital, 4TB Purple, IntelliPower, SATA III, 64MB	283,80	236,50

HDD 6TB WD64PURZ-74BWUY0



I1600	Western Digital, 6TB Purple, IntelliPower, SATA III, 64MB	434,40	362,00

HDD 8TB WD64PURZ-85BWUY0



6250	Western Digital, 8TB Purple, IntelliPower, SATA III, 5400RPM, 256MB	594,00	495,00

TF-64G-T-L




I1021	Uniview memorijska kartica Kapacitet: 64GB Maksimalna brzina čitanja: 90MB/s Maksimalna brzina pisanja: 65MB/s Dimenzije: 11mm x 15mm x 1mm Težina: 0,33g	27,60	23,00

TF-128G-T-L



I1022	Uniview memorijska kartica Kapacitet: 128GB Maksimalna brzina čitanja: 100MB/s Maksimalna brzina pisanja: 80MB/s Dimenzije: 11mm x 15mm x 1mm Težina: 0,33g	45,60	38,00

TF-256G-T-L



I1123	Uniview memorijska kartica Kapacitet: 256GB Maksimalna brzina čitanja: 90MB/s Maksimalna brzina pisanja: 65MB/s Dimenzije: 11mm x 15mm x 1mm Težina: 0,33g	108,00	90,00

Uniview SVIČEVI

NSW1010-5T-IN



I1130	5-Port 100 Megabit Plastic Shell Switch Supports IEEE802.3 and IEEE802.3u standards. Supports 10/100Mbps or 10/100/1000Mbps self-adaptive Ethernet port. Supports auto MDI/MDIX. Supports IEEE802.3 flow control for full-duplex mode and backpressure For half-duplex mode.	8,40	7,00

NSW1010-8T-IN



I1131	8-Port 100 Megabit Plastic Shell Switch Supports IEEE802.3 and IEEE802.3u standards. Supports 10/100Mbps or 10/100/1000Mbps self-adaptive Ethernet port. Supports auto MDI/MDIX. Supports IEEE802.3 flow control for full-duplex mode and backpressure For half-duplex mode.	12,00	10,00

NSW1010-5GT-IN



I1132	5-Port GIgabit Plastic Shell Switch Supports IEEE802.3 and IEEE802.3u standards. Supports 10/100Mbps or 10/100/1000Mbps self-adaptive Ethernet port. Supports auto MDI/MDIX. Supports IEEE802.3 flow control for full-duplex mode and backpressure For half-duplex mode	14,40	12,00

NSW1010-8GT-IN



I1133	8-Port Gigabit Plastic Shell Switch Supports IEEE802.3 and IEEE802.3u standards. Supports 10/100Mbps or 10/100/1000Mbps self-adaptive Ethernet port. Supports auto MDI/MDIX. Supports IEEE802.3 flow control for full-duplex mode and backpressure For half-duplex mode.	24,00	20,00

NSW3000-25GT1GP1GC-IN





I1190	Gigabit Cloud Management Switch Ports Type: 24 x 10/100/1000Mbps port (RJ45) 1 x 10/100/1000Mbps port (RJ45) 1 x Gigabit SFP 1 x Gigabit Combo Supports unified configuration, management, and search on the software, convenient for rapid operation and maintenance of multiple devices; supports automatically discovering the connected video devices and generating a network topology on the software. Supports Web login, and device configuration and management on the Web interface; Supports visiting the cloud by scanning the QR code. Allows to view the device status and network topology in real time on the app. Supports the extend mode for up to 250m communication range and 10Mbps auto-negotiation rate. Allows to report port abnormal alarms to the software for realtime monitoring. Supports port priority. The packets received by the priority port will be forwarded first when the switch is fully loaded. All metal casing, secure and reliable.	192,00	160,00

Uniview POE SVIČEVI

NSW2020-6T-POE-IN



I1023	6×100Mbps network ports (RJ45), od toga 4 PoE porta Podržava: IEEE802.3,IEEE802.3u, IEEE802.3az,IEEE802.3x,IEEE802.3af,IEEE802.3at Modovi rada: Default(Normal mode): Svi portovi komuniciraju normalno međusobno EXTEND(Surveillance mode): Distanca prenosa do 250 metara uz brzinu 10Mb/s. 6kV zaštita od prenapona PoE Budžet: 60W Maksimalna snaga porta: 30W Dimenzije: 108mm x 100mm x 25.5mm	54,00	45,00

NSW2100-6GT-POE-IN



I1188	4 Port Gigabits PoE Switch Ports Type: 4x 10/100/1000Mbps PoE port (RJ45) 2 x 10/100/1000Mbps port (RJ45) Supports Web login, and device configuration and management on the Web interface. Supports visiting the cloud by scanning the QR code. Allows to view the device status in real time on the app, and remotely restart the PoE power supply. Supports PoE power supply ; allows to enable or disable PoE power supply for the powered device; allows up to 250m power supply using a standard network cable. Supports the extend mode for up to 250m communication range and 10Mbps auto-negotiation rate. Supports port priority. The priority port will be powered first when the PoE power supply is full. All metal casing, secure and reliable. Max capacity:65W Maximum PoE power for single port: 30W	60,00	50,00

NSW2010-5GT-POE-IN



I1059	4 Port GigabitPoE Switch 1 Port Gigabit Uplink PoE Power up to 30W Each Port Supports IEEE802.3 at Standard, compatible with IEEE802.3af by electrical equipment (PD) Auto Detect Power Device Power Port Supply prioritization, guarantees the continuous power supply of key nodes IEEE802.3 X full duplex flow control and Backpressure half duplex flow control Line Speed Forwarding, intelligent identification Up to 250m transmission distance on surveillance mode	78,00	65,00

NSW2020-10T-POE-IN



I1024	10×100Mbps network ports (RJ45), od toga 8 PoE porta Podržava: IEEE802.3,IEEE802.3u, IEEE802.3az,IEEE802.3x,IEEE802.3af,IEEE802.3at Modovi rada: Default(Normal mode): Svi portovi komuniciraju normalno međusobno EXTEND(Surveillance mode): Distanca prenosa do 250 metara uz brzinu 10Mb/s. VLAN(Secure mode): 8 Downlink portova mogu komunicirati samo sa uplink portovima. 6kV zaštita od prenapona PoE Budžet: 88W Maksimalna snaga porta: 30W Dimenzije: 171mm x 101mm x 25.5mm	90,00	75,00

NSW2010-10GT-POE-IN



I1060	8 Port Gigabit PoE Switch 2 Port Gigabit Uplink PoE Power up to 30W Each Port Supports IEEE802.3 at Standard, compatible with IEEE802.3af by electrical equipment (PD) Auto Detect Power Device Power Port Supply prioritization, guarantees the continuous power Supply of key nodes IEEE802.3 X full duplex flow control and Backpressure half duplex flow control Line Speed Forwarding, intelligent identification Up to 250m transmission distance on surveillance mode	NEMA NA STANJU	

NSW2100-9GT1GP-LPOE-IN



I1179	8 Port Gigabits PoE Switch Ports Type: 8x 10/100/1000Mbps PoE port (RJ45) 1 x 10/100/1000Mbps port (RJ45) 1 x Gigabit SFP Supports Web login, and device configuration and management on the Web interface. Supports visiting the cloud by scanning the QR code. Allows to view the device status in real time on the app, and remotely restart the PoE power supply. Supports PoE power supply ; allows to enable or disable PoE power supply for the powered device; allows up to 250m power supply using a standard network cable. Supports the extend mode for up to 250m communication range and 10Mbps auto-negotiation rate. Supports port priority. The priority port will be powered first when the PoE power supply is full. All metal casing, secure and reliable.	96,00	80,00

NSW3000-8T2GT-POE-IN



I1134

Cloud Managed Ethernet Switch(PoE)
8 x 10/100Mbps POE port (RJ45) ,2 x Gigabit port (RJ45)
Supports unified configuration, management, and search on the software,
convenient for rapid operation and maintenance of multiple devices;
supports automatically discovering the connected video devices and
generating a network topology on the software.
Supports Web login, and device configuration and management on the
Web interface; supports visiting the cloud by scanning the QR code.
Allows to view the device status and network topology in real time on the app,
and remotely restart the PoE power supply.
Allows up to 250m power supply using a standard network cable.
Supports the extend mode for up to 250m communication range and
10Mbps auto-negotiation rate.
Allows to report port abnormal alarms to the software for realtime monitoring.
Supports port priority. The packets received by the priority port will be forwarded first when the switch
is fully loaded and the priority port will be powered first when the PoE power supply is full.
All metal casing, secure and reliable.
Maximum total power: 120W
Maximum PoE power for single port: 30W

96,00 **80,00**

NSW2020-16T2GC-POE-IN



I1067

16×100Mbps network ports (RJ45), 2x1000Mbps
uplink porta (RJ45), 2x1000Mbps SFP porta,
od toga 16x PoE porta
Podržava: IEEE802.3,IEEE802.3u,IEEE802.3az,
IEEE802.3x,IEEE802.3af,IEEE802.3at
Modovi rada: Default(Normal mode):
Svi portovi komuniciraju normalno međusobno
EXTEND(Surveillance mode): Distanca prenosa do
250 metara uz brzinu 10Mb/s.
VLAN(Secure mode): 16 x Downlink portova mogu
komunicirati samo sa uplink portovima.
6kV zaštita od prenapona PoE Budžet: 370W
Maksimalna snaga: 250W
Maksimalna PoE snaga porta: 30W
Dimenzije: 440mm x 207mm x 45mm
Moguća rek montaža 19'' , dolazi uz switch

216,00 180,00

NSW3000-16T1GT1GC-LPOE-IN



I1135

Cloud Management Switch
16 x 10/100Mbps POE port (RJ45) + 1 x Gigabit port (RJ45)+ 1 x Gigabit Combo
Supports unified configuration, management,
and search on the software, convenient for rapid
operation and maintenance of multiple devices;
supports automatically discovering the connected
video devices and generating a network topology on the software.
Supports Web login, and device configuration and
management on the Web interface
in real time on the app, and remotely restart the PoE power supply.
Supports PoE power supply and allows to view the power;
allows to enable or disable PoE power supply for the powered device;
Allows up to 250m power supply using a standard network cable.
Supports the extend mode for up to 250m communication range and
10Mbps auto-negotiation rate.
Allows to report port abnormal alarms to the software for realtime monitoring.
Supports port priority. The packets received by the priority port will be forwarded first when the switch
is fully loaded and the priority port will be powered first when the PoE power supply is full.
All metal casing, secure and reliable.
Maximum total power: 150W
Maximum PoE power for single port: 30W

192,00 **160,00**

NSW2020-24T1GT1GC-POE-IN



I1163

Unmanaged Ethernet Switch(PoE)
24×100Mbps PoE ports (RJ45) + 1×1000Mbps Gigaethernet ports +1×1000Mbps Combo ports
Multiple working modes to address your business needs: Default(Normal mode), VLAN(Secure mode),
EXTEND(Surveillance mode)
Support port traffic control
Support for secure mode, all downlink ports can communicate only with uplink ports
Up to 250m transmission distance on surveillance mode
Support buffer optimization
All metal housing, safe and reliable
Max capacity:370W
Max capacity for single port: 30W

232,20 **193,50**

NSW2010-24T2GC-PoE-IN



I1136

Ethernet Switch(PoE)
24×100Mbps PoE ports (RJ45)+2×1000Mbps Combo ports
Multiple working modes to address your business needs:
Default(Normal mode), VLAN(Secure mode), EXTEND(Surveillance mode)
Support port traffic control
Support for secure mode, all downlink ports can communicate
Only with uplink ports
Up to 250m transmission distance on surveillance mode
Support buffer optimization
All metal housing, safe and reliable
Max power: 390W

288,00 240,00

NSW3000-25GT1GP1GC-LPOE-IN

NOVO



I1191

Gigabit Cloud Management PoE Switch
Ports Type:
24 x 10/100/1000Mbps PoE port (RJ45)
1 x 10/100/1000Mbps port (RJ45)
1 x Gigabit SFP
1 x Gigabit Combo
Supports unified configuration, management, and search on the software, convenient for rapid operation and maintenance of multiple devices; supports automatically discovering the connected video devices and generating a network topology on the software.
Supports Web login, and device configuration and management on the Web interface;
Supports visiting the cloud by scanning the QR code. Allows to view the device status and network topology in real time on the app, and remotely restart the PoE power supply.
Supports PoE power supply and allows to view the power; allows to enable or disable PoE power supply for the powered device; allows up to 250m power supply using a standard network cable.
Supports the extend mode for up to 250m communication range and 10Mbps auto-negotiation rate.
Allows to report port abnormal alarms to the software for realtime monitoring.
Supports port priority. The packets received by the priority port will be forwarded first when the switch is fully loaded and the priority port will be powered first when the PoE power supply is full.
All metal casing, secure and reliable.

300,00 250,00

MONITORI

MW3224-V

NOVO



I1164

UNV 24" LED Monitor
Resolution 1920 × 1080
Color Support: 16.7 M
Refresh Rate: 60 Hz
Operation Hour: 24/7

120,00 100,00

DODATNA OPREMA

GCB01-B7

NOVO



I1101

UNV-Link Pro Connect Box
Network: 4 x RJ45 10M/100M Base-TX EthernetNetwork
Port 1 Support POE (IEEE802.3af) OutputNetwork Port 4
Support PSE Voltage Test
Wi-Fi 2.4G Wi-Fi
Battery: 7500mAH
Power Input: 1 x DC 5V/2A max, type-c
Power Output: 1 x DC 12V/1A output; 1 x DC 5V/1A output, type-A

78,00 65,00

PoE Extender




2317

Model: ZX-14AF-S (HORACO)
PoE Input Port (Uplink): 1x 10/100Mbps RJ45
PoE Output Ports: 4x 10/100Mbps RJ45
PoE Protocol: IEEE 802.3af / IEEE 802.3at
Power Capacity: Supports up to 60W Total Input / Max 30W Output per port
Transmission Distance: 100 meters (Standard) / Up to 250 meters (Extend Mode)

30,00 25,00


KABLOVI

UNV Cat6 (UTP), CCA




i1044	CAB-LC3100B-CCA-IN Conductor material: CCA(Copper content: 27%) Insulation material: HDPE Packing length: 305±1 m Sheath material: PVC	0,30	0,250

UNV Cat5e (UTP), BC



i1045	CAB-LC2100A-E2-ECA-IN Conductor material: OFC (Oxygen free copper) Insulation material:HDPE Packing length: 305±1 m Sheath material: PVC (complies RoHS/REACH)	0,54	0,45

UNV Cat6 (UTP), BC



i1046	CAB-LC3100A-EC-ECA-IN Conductor material: OFC (Oxygen free copper) Insulation material: HDPE Packing length: 305±1 m Sheath material: PVC (complies RoHS/REACH)	0,78	0,65

CAB-LC3110B-E-IN



I1186	Cat6 305m Outdoor UTP Network Cable (OFC 0.5mm Black) Packing length: 305±1m Material: Solid-Bare Copper Insulation material: HDPE Sheath material(IN Jacket): PVC(complies RoHS/REACH) Sheath material (OUT Jacket): LDPE Color: Black	0,84	0,70


KUĆIŠTA I NOSAČI

DOZNA ZA KAMERE BA-01



5633	Razvodna kutija za spoljašnu montažu kamere, 131x131x51 mm; Pogodna za direktnu montažu kamere na kutiju i smeštanje konektora za povezivanje.	3,60	3,00

DOZNA ZA KAMERE G153



8644	Razvodna kutija za spoljašnu montažu kamere, 115x115x55 mm; Pogodna za direktnu montažu kamere na kutiju i smeštanje konektora za povezivanje.	3,20	2,67

DOZNA ZA KAMERE BA-02



8645	Razvodna kutija za unutrašnju montažu kamere, 120/50mm; Pogodna za direktnu montažu kamere na kutiju i smeštanje konektora za povezivanje.	3,00	2,50

TR-JB05-B-IN



I1062 Nosač za Dome kamere serije IPC21XX
Dimenzije: Φ104.4mm*54.5mm
Težina: 0.36kg
Materijal: Aluminijum

19,20 16,00

TR-JB05-A-IN



I1061 Nosač za kamere
Dimenzije: Φ93 × 93 × 39mm
Težina: 0.2kg
Materijal: Aluminijum

15,60 13,00

TR-JB03-G-IN



I1064 Nosač za Dome kamere serije IPC32x i IPC31x
Dimenzije: φ106.6mm*36mm
Težina: 0.2kg
Materijal: Aluminijum

13,20 11,00

TR-JB03-I-IN



I1063 Nosač za Dome kamere serije IPC36XXL i IPCT1XX
Dimenzije: Ø117.8 × 36mm
Težina: 0.2kg
Materijal: Aluminijum

15,60 13,00

TR-JB03-H-IN



I1171 Nosač za Dome kamere serije IPC363X, IPC36XXS/E i 4MP fisheye
Dimenzije: Φ126mm*36mm (4.96" x1.42")
Težina: 0.24kg
Materijal: Aluminijum legura

14,40 12,00

TR-JB04-C-IN



I1172 Nosač za Dome kamere serije 323
Dimenzije: **Φ**144.8 mm × 42.5 mm (5.7" × 1.7")
Težina: 0.3kg
Materijal: Aluminijum legura

15,60 13,00

TR-JB07-D-IN



I1170 Bullet Junction Box(Support wiring from behind)

30,00 25,00

TR-JB07/WM03-G-IN



I1165 Wall Mounting Assembling Bracket For 32 Fix-dome
&Mini Fix-dome&Plastic Turret Camera


36,00 30,00

TR-WM07P-B



I1181	Dome Wall Mounting Plastic Bracket Application: IPC32X Series, IPC361XX Series （Plastic） Bracket Weight: 0,10kg	7,20	6,00

UNV TR-UP06-C-IN-V2



I1169	Pole Mounting Bracket for Bullet Junction Box Only Application: Outdoor, pole or rail installation for Bullet camera of IPC23XX OEM IPC23XX/22X、IPC74X and IPC252/26X series Bracket Dimensions: 136.0 mm × 127.0 mm × 63.6 mm (5.4" × 5.0" × 2.5") Bracket Weight: 0.34kg Bracket Material: Aluminum alloy	14,40	12,00

KONEKTORI

BNC NA LEMLJENJE
SA ŠRAFOM



3299	BNC konektor muški sa šrafom. Pakovanje 100 kom.	0,54	0,45

BNC NA LEMLJENJE



2560	BNC konektor muški na lemljenje. Pakovanje 100 kom.	0,54	0,45

BNC KONEKTOR



30020	BNC konektor muški na šraf.	0,50	0,42

BNC NA KRIMP RG59



2534	BNC konektor za RG59 kabl na krimp. Pakovanje 100 kom.	0,60	0,50

BNC MUŠKI- F ŽENSKI



1795	BNC konektor muški F ženski. Pakovanje 100 kom.	0,70	0,58

BNC NASTAVAK



4447	BNC konektor. Nastavak ženski-ženski. Pakovanje 100 kom.	0,54	0,45

F KONEKTOR na krimp
RG6



2559	F konektor za RG6 kabl. Pakovanje 100 kom.	0,14	0,12

F KONEKTOR na krimp RG59



1796	F konektor za RG59 kabl. Pakovanje 100 kom.	0,14	0,12

RF METALNI G MUŠKI



4448	RF metalni G muški (UGAONI) konektor Pakovanje 100 kom.	0,35	0,29

RCA MUŠKI-F ŽENSKI



4446 RCA muški - F ženski konektor
Pakovanje 100 kom.

0,53 0,44

F NASTAVAK



3300 F nastavak Ženski - Ženski
Pakovanje 100 kom

0,22 0,18

F KONEKTOR
KOMPRESIONI RG6 XL



1625 Profesionalni PPC F konektor za RG6 kabl.
Pakovanje 50 kom.

0,44 0,37

F KONEKTOR
KOMPRESIONI RG11 XL



1627 Profesionalni PPC F konektor za RG11 kabl.

2,96 2,47

F KONEKTOR
KOMPRESIONI RG59 XL



1624 Profesionalni PPC F konektor za RG59 kabl.
Pakovanje 50 kom.

0,47 0,39

DC KABL-MUŠKI



1387 DC utikač-muški

0,47 0,39

DC KABL-ŽENSKI



1391 DC utikač-ženski

0,47 0,39

DC KONEKTOR MUŠKI



3425 DC konektor Muški

0,37 0,31

DC KONEKTOR ŽENSKI



4197 DC konektor ženski.

0,38 0,32

DC RAZDELNIK 1-4



1388 1 DC utičnica - 4 DC utikača

1,99 1,66

DC RAZDELNIK 1-8



1389 1 DC utičnica - 8 DC utikača

3,97 3,31

CAT7 RJ45



Mrežni konektor RJ45 kategorija 7

0,50 0,42

CAT6 UNV RJ45 GC-RJ6-IN



I1182	Cat6 Unshielded Crystal Head 3µ inches gold-plated for excellent contact performance Stable data transmission with up to 750 plugs and unplugs Highly transparent PC material support RoHS standards, Wear-resistant and durable 8 pins × 8 conductors, support 1000Bas-T Ethernet	0,12	0,10

CAT5 UNV GC-RJ5e-IN



i1183	Cat5e Unshielded Crystal Head 3µ inches gold-plated for excellent contact performance Stable data transmission with up to 750 plugs and unplugs Highly transparent PC material support RoHS standards, wear-resistant and durable 8 pins × 8 conductors, support 1000Base-T Ethernet	0,10	0,08

CAT5 RJ45



0067	Mrežni konektor RJ45	0,05	0,04

Telefonski konektor RJ11



0066	Telefonski konektor RJ11	0,02	0,02

DODATNA OPREMA

ŠTAMPAČ P-TOUCH E100



4663	Širina TZ trake: 6, 9 i 12mm ABC Tastatura LCD displej sa 16 karaktera u jednoj liniji Ispis u najviše 2 linije Najveća visina slova za štampanje: 9mm Brzina štampe: 20mm/s Rezolucija štampe: 180 dpi Serijsko numerisanje 1-9 Podešavanje dužine etikete 30-300mm 9 različitih vrsta fontova, veličine 15 Horizontalni ili vertikalni ispis Manuali sekač Napajanje: 6 AAA baterija *dolazi u kompletu sa praktičnim koferom, trakom za ruku, jednom TZe trakom kao uzorkom i uputstvom za upotrebu	106,56	88,80

MIKROFON LY-501C



2584	Audio modul sa izvedenim konektorima. Napajanje 12 V DC	3,97	3,31

MIKROFON LY-502B



2583	Audio modul plastični sa trimerom. Napajanje 12 V DC	6,00	5,00

MIKROFON LY-506



1937	Audio modul metalni sa trimerom. Napajanje 12 V DC	10,00	8,33

DS-2FP2020



5222	Viisoko osetljivi omnidirekcioni mikrofon. Osetljivost -34 dB. Prenos zvuka do 3.000 metara. SNR: 60dB. Nivo signala 2Vpp, 12Vdc. Dimenzije 78 x 28mm. Napajanje 12 VDC (9 V to 15 V).	36,00	30,00

DH-PFM800-4K (par)



3632	One (1) Channel Balun Real-time Transmission over UTP CAT5E/6 Cable Compatible with HDCVI, TVI, AHD, and CVBS Video Formats Transmission Distance at 4K: 200 m (656 ft) External Power Supply not Required	7,80	6,50

OG razvodna kutija 100x100				
	00091	Razvodna kutija 100x100	1,80	1,50
OG razvodna kutija 80x80				
	00092	Razvodna kutija 80x80	1,10	0,92
OG razvodna kutija 160x100x74				
	00093	Razvodna kutija 160x100x74	3,00	2,50
OG razvodna kutija 160x100x48				
	00094	Razvodna kutija 160x100x48	2,64	2,20
ALAT ZA KRIMP RG6, RG11,RG59				
	3302	Alat za krimpovanje RG6, RG11,RG59 konektora	48,00	40,00
STRIPER ZA KABLOVE RG59,RG6				
	3301	Alat za stripovanje RG59,RG6 kablova	20,40	17,00
ALAT KOMPRESIONI ZA RG59, RG6				
	1629	Profesionalni PPC alat za kompresovanje kompresionih F konektora RG59,RG6 XL oznake.	37,92	31,60
ALAT KOMPRESIONI, ZA RG6,RG11,RG59				
	3796	Profesionalni PPC alat za kompresovanje kompresionih F konektora RG6,RG11,RG59 XL oznake.	54,34	45,28
KLEŠTA ZA KRIMPOVANJE KOMPLET				
	5790	Komplet sadrži: - LAN Tester RJ11, 12 i 45 - LSA Punch Down Tool sa sečicom za kabl - Alat za krimpovanje RJ11, 12 i 45 - Alat za sečenje i skidanje izolacije - Torbica Ne sadrži bateriju za Network Tester (9V block cell)	28,68	23,90
NAPAJANJA				
XED-1212S				
	1633	Ulaz: 90V-264V Izlaz: 12V , 1A Snaga: 12W Dimenzije: 74 (D) x 46 (Š) x 30 (V) mm Dužina izlaznog kabla: 110cm, 10.5x5,5x2mm konektor	6,00	5,00
XED-2012S				
	1382	Ulaz: 90V-264V Izlaz: 12V , 2A Snaga: 24W Dimenzije: 98 (D) x 52 (Š) x 35 (V) mm Dužina izlaznog kabla: 110cm, 10.5x5,5x2mm konektor	8,04	6,70

XED-3013S 	1383	Ulaz: 90V-264V Izlaz: 12V , 3A Snaga: 36W Dimenzije: 98 (D) x 52 (Š) x 35 (V) mm Dužina izlaznog kabla: 110cm, 10.5x5,5x2mm konektor	12,60	10,50
XED-5013S 	1384	Ulaz: 100V-240V Izlaz: 12V , 5A Snaga: 60W Dimenzije: 126 (D) x 57 (Š) x 32 (V) mm Dužina izlaznog kabla: 110cm, 10.5x5,5x2mm konektor	16,20	13,50
XED-6013B 	3509	Ulaz: 100V-240V Izlaz: 12V , 6A Snaga: 72W Dimenzije: 126 (D) x 57 (Š) x 32 (V) mm Dužina izlaznog kabla: 110cm, 10.5x5,5x2mm konektor	20,40	17,00
9-KANALNO NAPAJANJE XED-10A12VX-9L 	5435	Snaga: 120W Ulaz: 100~240V 50~60Hz Izlaz: 12V 10A 9 kanala Dimenzije: 237*213*70mm Neto težina: 1800g Napomena: Sadrži AC kabl	82,80	69,00
18-KANALNO NAPAJANJE XED-15A12VX-18L 	5114	Snaga: 180W Ulaz: 100~240V 50~60Hz Izlaz: 12V 15A 18 kanala Dimenzije: 240*218*70mm Neto težina: 2300g Napomena: Sadrži AC kabl	94,80	79,00

Sve cene su iskazane u EUR sa obračunatim PDV-om, podložne su promenama i zavisne od odnosa DIN/EUR/USD. Plaćanje se vrši u dinarima po važećem prodajnom kursu poslovne banke. ISEC zadržava pravo izmene cena bez prethodne najave. Dostupna i oprema koje nema u cenovniku! Za detaljnije informacije, molimo kontakirajte nas na gore navedene brojeve telefona ili posetite www.isec.rs