

CENOVNIK UNIVIEW VIDEO NADZORA - 25.09.2026.



NAZIV	ŠIFRA	OPIS	CENA	
DVR UREDJAJI			sa PDV	bez PDV
4 KANALNI				

XVR301-04G3



4-CH Hybrid DVR

Podrzan video ulaz: 5MP @ 20fps (Prvi kanal 20fps, ostali 12fps) 5MP @ 12fps, 4MP @ 30fps (Prvi kanal)

4MP @ 15fps, 1080P @ 30fps, 720P @ 60fps

Podrzan video ulaz IP kamere: do 4MP (2 IP kamere ili svih 6)

Rezolucija snimanja encoding: 5MP Lite/4MP Lite /1080P/720P/960H/D1/CIF

Video kompresija: H.265, H.264

Video/audio ulazi: 4ch BNC, 1ch audio, RCA

Video/audio izlazi: HDMI/VGA (FULL HD), 1ch audio

Ulazno/Izlazni saobraćaj: 16/48 Mbps

Smart funkcije: Detekcija pokreta, video loss detection

Dodatni ulazi: RJ45 mrežni ulaz, 2xUSB 2.0 interfejs

Mrežni protokoli: TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE

Hard disk prostor: 1 sata HDD do 8TB kapaciteta

Opšte: Napajanje 12V DC, Potrošnja 8W bez HDD, Podržava audio over coaxial cable

Radna temperatura: -10 °C ~ +55 °C,

Dimenzije: 260mm × 226mm × 47mm (10.2" × 8.9" × 1.8"), 1.1kg

11031

69,60

58,00



XVR301-04Q3



4-CH Hybrid DVR

Rezolucija snimanja: 8MP Lite/5MP/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF

Podržava TVI,AHD, CVI,CVBS

Rezolucija snimanja IP kamera: do 8mp (2 IP kamere ili svih 6)

Video kompresija: H.265, H.264

Video/audio ulazi: 4ch BNC, 1ch audio

Video/audio izlazi: HDMI/VGA (FULL HD), CVBS (960x576), 1ch audio

Ulazno/Izlazni saobraćaj: 48/60 Mbps

Smart funkcije: Motion detection, video loss detection, audio detection,

Dodatni ulazi: RJ45 mrežni ulaz, 2xUSB 2.0 interfejs, 1xRS485

Mrežni protokoli: TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP

Hard disk: 1 sata HDD do 8TB kapaciteta

Napajanje 12V DC, Potrošnja 10W bez HDD,

Radna temperatura: -10 °C ~ +55 °C,

Dimenzije: 260mm × 226mm × 47mm

11032

96,00

80,00

XVR301-04U3



11129

4-ch 1U Digital Video Recorder

Recording Resolution: 8MP/5MP/4MP/1080P/720P/D1
Support Ultra 265/H.265/H.264 video formats
Support audio over coaxial cable (TVI cameras)
Control the dual-light of UNV analog cameras under TVI
Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
Support 1-ch CVBS output, 1-ch VGA output,
1-ch HDMI output at up to 4K (3840 x 2160)
HDMI and VGA simultaneous output
Long transmission distance over coaxial cable
Support mainstream cameras of ONVIF and RTSP protocols
1HDD Up to 16 TB

144,00 120,00

8 KANALNI

XVR301-08G



11176

8-Ch Digital Video Recorder

Support H.265/H.264 video formats
Recording Resolution: 5MP Lite/4MP Lite /1080P/720P/960H/D1/CIF
Support audio over coaxial cable (only for TVI cameras)
Control the dual-light of UNV analog cameras under TVI
Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
4/8/16-channel BNC input
Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080
HDMI and VGA simultaneous output
Long transmission distance over coaxial cable
Support mainstream cameras of ONVIF and RTSP protocols
1 SATA interface up to 6 TB

84,00 70,00



XVR301-08G3



11025

8-CH Hybrid DVR

Podrška: TVI,AHD, CVI, CVBS
Rezolucija snimanja: 5MP Lite/4MP Lite /1080P/1080P Lite/720P/CIF
Rezolucija snimanja IP kamera: do 4mp (4 IP kamere ili svih 8)
Video/audio ulazi: 8-ch (BNC) / 1-ch (RCA)
Video/audio izlazi: HDMI/VGA (FULL HD), CVBS, 1ch audio
Ulazno/Izlazni saobraćaj: 32/64 Mbps
Dodatni ulazi: RJ45 mrežni ulaz, 2xUSB 2.0 interfejs
Mrežni protokoli: TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP
Hard disk: 1 sata HDD do 8TB
Napajanje 12V DC, Potrošnja 8W bez HDD
Radna temperatura: -10 °C ~ +55 °C
Dimenzije: 260mm × 226mm × 47mm

91,20 75,00



XVR301-08Q3



11033

8-CH Hybrid DVR

Rezolucija snimanja: 8MP Lite/5MP/ 5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF
Podrška TVI,AHD, CVI,CVBS
Rezolucija snimanja IP kamera: do 8mp (4 IP kamere ili svih 12)
Video kompresija: H.265, H.264
Video/audio ulazi: 8ch BNC, 1ch audio
Video/audio izlazi: HDMI/VGA (FULL HD), CVBS (960x576), 1ch audio
Ulazno/Izlazni saobraćaj: 40/64 Mbps
Smart funkcije: Motion detection, video loss detection, audio detection,
Dodatni ulazi: RJ45 mrežni ulaz, 2xUSB 2.0 interfejs, 1xRS485, Alarmni ulaz/izlaz 4/1
Mrežni protokoli: TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP
Hard disk: 1 sata HDD do 8TB kapaciteta
Napajanje 12V DC,
Potrošnja 10W bez HDD,
Radna temperatura: -10 °C ~ +55 °C,
Dimenzije: 260mm × 226mm × 47mm

138,00 115,00



XVR301-08U3



uniview
Better Security. Better World.

8-Ch 1U Digital Video Recorder

Recording Resolution: 8MP/5MP/4MP/1080P/720P/D1
Support Ultra 265/H.265/H.264 video formats
Support audio over coaxial cable (TVI cameras)
Control the dual-light of UNV analog cameras under TVI
Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
8-channel BNC input
Support 1-ch CVBS output, 1-ch VGA output, 1-ch HDMI output at up to 4K (3840 x 2160)
HDMI and VGA simultaneous output
Long transmission distance over coaxial cable
Support mainstream cameras of ONVIF and RTSP protocols

I1080

222,00 185,00

16 KANALNI

XVR301-16G3



uniview
Better Security. Better World.

16-CH Hybrid DVR

Podržava: TVI, AHD, CVI, CVBS, IP cameras
Rezolucija snimanja: 5MP Lite/4MP Lite /1080P/1080P Lite/720P/D1/CIF
IP kamere: do 8 IP kamere ili svih 16
Video/audio ulazi: 16-ch BNC / 1-ch RCA
Video/audio izlazi: VGA, HDMI, CVBS, 1ch audio
Ulazno/Izlazni saobraćaj: 40/64 Mbps
Dodatni ulazi: RJ45 mrežni ulaz, 2x USB, 1x RS485
Mrežni protokoli: TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP
Hard disk: 1 SATA HDD do 8TB
Napajanje 12V DC, Potrošnja 10W bez HDD
Radna temperatura: -10 °C ~ +55 °C
Dimenzije: 260mm x 226mm x 47mm

I1026

148,80 124,00

XVR302-16Q3



uniview
Better Security. Better World.

16-CH Hybrid DVR

Rezolucija snimanja: 8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF
Podržava 8MP@15fps na prva 4 kanala
Rezolucija snimanja IP kamera: 8IP kamera (isključivanjem analognih kanala 24IP), svaki kanal do 8mpx.
Ulazno/Izlazni saobraćaj: 72/80 Mbps
Video kompresija: H.265/H.264 video kompresija,
Video/audio ulazi: 16ch BNC, 1ch RCA
Video/audio izlazi: HDMI/VGA (FULL HD), 1ch RCA
Smart funkcije: Motion detection, tampering, video loss detection, face detection, intrusion detection, cross line detection, audio detection, defocus detection, scene change detection
Dodatni ulazi: RJ45 mrežni ulaz, 1xUSB 3.0 interfejs (pozadi) 1xUSB 2.0 (napred), 1x RS485
Mrežni protokoli: TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Hard disk prostor: 2 sata HDD do 6TB kapaciteta
Opšte: Napajanje 12V DC, Potrošnja 12W bez HDD,
Radna temperatura: -10 °C ~ +55 °C,
Dimenzije: 380mm x 315mm x 53mm, Težina 1.9Kg

I1034

288,00 240,00

KIT/XVR 301-04G3/4*UAC-T112-F28



UNV KIT/XVR 301-04G3/4*UAC-T112-F28

Kompet sadrži:
1x XVR 04G3
4x UAC-T112-F28
1x Napajanje 2A
4x 20m Koaksijalni kabl + napajanje (sa konektorima)
1x Razdelnik 1 / 4

I1065

180,00 150,00

ANALOGNE DOME KAMERE 2MP

UAC-T112-AF28



2MP HD Fixed IR Turret Analog Camera

2MP high quality image
TVI/AHD/CVI/CVBS
IR-cut filter with auto switch (ICR)
Built-in microphone
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages

I1066

24,00 20,00

UAC-T122-AF28LM 		2MP LightHunter HD IR Fixed Turret Analog Camera High quality imaging with 2MP resolution TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) LightHunter monitoring with high-sensitivity sensor 3D noise reduction technology delivers clean and sharp images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables Supports digital defog 3-Axis	11054	36,00	30,00
UAC-T122-AF40LM 		2MP LightHunter HD IR Fixed Turret Analog Camera High quality imaging with 2MP resolution TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) LightHunter monitoring with high-sensitivity sensor 3D noise reduction technology delivers clean and sharp images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables Supports digital defog 3-Axis	11099	36,00	30,00
UAC-T122-AF28M-W 		2MP ColorHunter HD Fixed Turret Analog Camera 2MP high quality imaging TVI/AHD/CVI/CVBS Supports white light illumination, 24/7 color images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables Supports digital defog Metal front face and housing 3-Axis	11016	36,00	30,00
UAC-T142-AF28LM-DL 		2MP ColorHunter Fixed Dual-light Turret Analog Camera High quality imaging with 2MP resolution TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) Smart Dual Light (only TVI) 3D noise reduction technology delivers clean and sharp images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables	11077	43,20	36,00
ANALOGNE BULLET KAMERE 2MP					
UAC-B112-F28 		2MP HD Fixed IR Mini Bullet Analog Camera 2MP high quality image TVI/AHD/CVI/CVBS IR-cut filter with auto switch (ICR) Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages	11000	25,20	21,00
UAC-B112-AF28 		2MP Fixed IR Bullet Analog Camera 2MP high quality image TVI/AHD/CVI/CVBS Supports IR-cut filter with auto-switch (ICR) 3D noise reduction technology delivers clean and sharp images Supports 180° horizontal flip, 180° vertical flip OSD configuration menu, easy to operate IP67 waterproof and dustproof design, high reliability OSD configuration menu in 11 languages Built-in microphone for high quality audio transmission via coaxial cables	11121	26,40	22,00

UAC-B122-AF28LM



I1053	2MP LightHunter HD IR Fixed Mini Bullet Analog Camera		
	High quality imaging with 2MP resolution		
	TVI/AHD/CVI/CVBS		
	Supports IR-cut filter with auto-switch (ICR)		
	LightHunter monitoring with high-sensitivity sensor		
	3D noise reduction technology delivers clean and sharp images	36,00	30,00
	Supports 180° horizontal flip, 180° vertical flip		
	OSD configuration menu, easy to operate		
	IP67 waterproof and dustproof design, high reliability		
	OSD configuration menu in 11 languages		
	Built-in microphone for high quality audio transmission via coaxial cables		
	Supports digital defog		

UAC-B122-AF40LM



I1098	2MP LightHunter HD IR Fixed Mini Bullet Analog Camera		
	High quality imaging with 2MP resolution		
	TVI/AHD/CVI/CVBS		
	Supports IR-cut filter with auto-switch (ICR)		
	LightHunter monitoring with high-sensitivity sensor		
	3D noise reduction technology delivers clean and sharp images	36,00	30,00
	Supports 180° horizontal flip, 180° vertical flip		
	OSD configuration menu, easy to operate		
	IP67 waterproof and dustproof design, high reliability		
	OSD configuration menu in 11 languages		
	Built-in microphone for high quality audio transmission via coaxial cables		
	Supports digital defog		

UAC-B122-AF28M-W



I1014	2MP ColorHunter HD Fixed Mini Bullet Analog Camera		
	2MP high quality imaging		
	TVI/AHD/CVI/CVBS		
	Supports white light illumination, 24/7 color images		
	Supports 180° horizontal flip, 180° vertical flip		
	OSD configuration menu, easy to operate	36,00	30,00
	IP67 waterproof and dustproof design, high reliability		
	SD configuration menu in 11 languages		
	Built-in microphone for high quality audio transmission via coaxial cables		
	Supports digital defog		
	Metal front face and housing		

UAC-B122-AF28M-W-Black



I1214	2MP ColorHunter HD Fixed Mini Bullet Analog Camera		
	2MP high quality imaging		
	TVI/AHD/CVI/CVBS		
	Supports white light illumination, 24/7 color images		
	Supports 180° horizontal flip, 180° vertical flip		
	OSD configuration menu, easy to operate	36,00	30,00
	IP67 waterproof and dustproof design, high reliability		
	SD configuration menu in 11 languages		
	Built-in microphone for high quality audio transmission via coaxial cables		
	Supports digital defog		
	Metal front face and housing		

UAC-B122-AF40M-W



I1015	2MP ColorHunter HD Fixed Mini Bullet Analog Camera		
	2MP high quality imaging		
	TVI/AHD/CVI/CVBS		
	Supports white light illumination, 24/7 color images		
	Supports 180° horizontal flip, 180° vertical flip		
	OSD configuration menu, easy to operate	37,20	31,00
	IP67 waterproof and dustproof design, high reliability		
	OSD configuration menu in 11 languages		
	Built-in microphone for high quality audio transmission via coaxial cables		
	Supports digital defog		
	Metal front face and housing		

UAC-B142-AF28LM-DL



2MP ColorHunter Fixed Dual-light Bullet Analog Camera
High quality imaging with 2MP resolution
TVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
Smart Dual Light (only TVI)
3D noise reduction technology delivers clean and sharp images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables

11076

46,80 39,00

UAC-B142-AF40LM-DL



2MP ColorHunter Fixed Dual-light Bullet Analog Camera
High quality imaging with 2MP resolution
TVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
Smart Dual Light (only TVI)
3D noise reduction technology delivers clean and sharp images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables

11122

46,80 39,00

ANALOGNE DOME KAMERE 5MP

UAC-T115-AF28



5MP Fixed IR Turret Analog Camera
5MP high quality image
TVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables

11126

30,00 25,00

UAC-T125-AF28LM



5MP LightHunter HD IR Fixed Turret Analog Camera
High quality imaging with 5MP resolution
TVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
LightHunter monitoring with high-sensitivity sensor
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables
3-Axis

11056

46,80 39,00

UAC-T125-AF28M-W



5MP ColorHunter HD Fixed Turret Analog Camera
5MP high quality imaging
TVI/AHD/CVI/CVBS
Supports white light illumination, 24/7 color images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables
Metal front face and housing
3-Axis

11020

48,00 40,00

UAC-T145-AF28LM-DL



5MP ColorHunter Fixed Dual-light Turret Analog Camera
High quality imaging with 5MP resolution
TVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
Smart Dual Light (only TVI)
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables

11079

50,40 42,00

ANALOGNE BULLET KAMERE 5MP

UAC-B115-F28



I1002

5MP HD Fixed IR Mini Bullet Analog Camera

5MP high quality image
TVI/AHD/CVI/CVBS
IR-cut filter with auto switch (ICR)
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages

30,00 25,00

UAC-B115-AF28



I1125

5MP Fixed IR Bullet Analog Camera

5MP high quality imageTVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables

30,00 25,00

UAC-B125-AF28LM



I1055

5MP LightHunter HD IR Fixed Mini Bullet Analog Camera

High quality imaging with 5MP resolution
TVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
LightHunter monitoring with high-sensitivity sensor
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables

44,40 37,00

UAC-B125-AF40LM



I1124

5MP LightHunter HD IR Fixed Mini Bullet Analog Camera

High quality imaging with 5MP resolution
TVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
LightHunter monitoring with high-sensitivity sensor
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables

44,40 37,00

UAC-B125-AF28M-W



I1018

5MP ColorHunter HD Fixed Mini Bullet Analog Camera

5MP high quality imaging
TVI/AHD/CVI/CVBS
Supports white light illumination, 24/7 color images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables
Metal front face and housing

48,00 40,00

UAC-B125-AF40M-W



I1019

5MP ColorHunter HD Fixed Mini Bullet Analog Camera

5MP high quality imaging
TVI/AHD/CVI/CVBS
Supports white light illumination, 24/7 color images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables
Metal front face and housing

49,20 41,00

UAC-B145-AF28LM-DL



I1078

5MP ColorHunter Fixed Dual-light Bullet Analog Camera

High quality imaging with 5MP resolution
TVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
Smart Dual Light (only TVI)
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables

54,00

45,00

UAC-B315-ADZLM



I1185

5MP LightHunter VARIFOCAL IR Bullet Analog Camera

High quality imaging with 5MP resolution
2.8mm-12mm motorized lens
TVI/AHD/CVI/CVBS
Illumination Distance: 50m
Supports IR cut filter with auto switch (ICR)
LightHunter monitoring with high sensitivity sensor
3D noise reduction technology delivers clean and sharp images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built in microphone for high quality audio transmission via coaxial cables

90,00

75,00

NVR UREDJAJI

NVR301-04S3



I1049

4-ch NVR

Rezolucija snimanja: 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p
Ulazno/Izlazni saobraćaj: 64/48Mbps
Video kompresija: Ultra 265, H.265, H.264 video kompresija,
Video/audio izlazi: HDMI 4K resolution /VGA (FULL HD),
Smart Funkcije: Face detection, Intrusion detection, Cross line detection,
Audio detection
ONVIF conformance: Profile S, Profile G, Profile T
Pretraga snimka po smart funkcijama: Face search, Behavior search,
Human Body search
Dodatni ulazi: RJ45 mrežni ulaz, 2 x USB2.0, Audio out 3.5mm
Mrežni protokoli: TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Hard disk prostor: 1 sata HDD do 6TB kapaciteta
Opšte: Napajanje 12V DC, Potrošnja 5W bez HDD,
Radna temperatura: -10 °C ~ +55 °C,
Dimenzije: 260mm × 240mm × 45mm (10.2"×9.4"×1.8 "), 1kg

108,00

90,00

NVR301-04B-IQ



I1115

4-ch NVR

Decoding Capability: Smart Off: 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30
Smart On: 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30
Support Ultra 265/H.265/H.264 video formats
Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T) and RTSP protocols
Support HDMI and VGA simultaneous output
Up to 12 Megapixels resolution recording
ANR technology to enhance the storage reliability when the network is disconnected
Support cloud upgrade
1x HDD, up to 10TB

132,00

110,00

NVR501-04B-IQ



I1150

4-ch NVR

Decoding Capability:
Smart Off: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30
Smart On: 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30
Support Ultra H.265/H.265/H.264 video formats
Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
Support HDMI and VGA simultaneous output
Up to 16 Megapixels resolution recording
ANR technology to enhance the storage reliability when the network is disconnected
Support cloud upgrade
1 SATA Interface, up to 16 TB

150,00

125,00

NVR301-08S3 	EASY	8-ch NVR Rezolucija snimanja: 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF Ulazno/Izlazni saobraćaj: 64/48 Mbps Video kompresija: Ultra 265, H.265, H.264 video kompresija, Video/audio izlazi: 1-ch HDMI, 1-ch VGA, HDMI do 4K(3840x2160) rezolucije Smart Funkcije: Face detection, Intrusion detection, Cross line detection, Audio detection Pretraga snimka po smart funkcijama: Face search, Behavior search, Human Body search ONVIF conformance: Profile S, Profile G, Profile T Dodatni ulazi: RJ45 mrežni ulaz, 2xUSB 2.0., Mrežni protokoli: P2P, UPnP, NTP, DHCP, PPPoE Hard disk prostor: 1 sata HDD do 6TB kapaciteta Opšte: Napajanje 12V DC, Potrošnja 5W bez HDD, Radna temperatura: -10 °C ~ +55 °C, Dimenzije: 260mm × 240mm × 46mm, Težina 1Kg	I1048	120,00	100,00
NVR301-08B-IQ 	EASY	8-ch NVR Decoding Capability: Smart Off: 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30 Smart On: 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30 Support Ultra 265/H.265/H.264 video formats 4/8/16 channel input Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T) and RTSP protocols Support HDMI and VGA simultaneous output Up to 12 Megapixels resolution recording ANR technology to enhance the storage reliability when the network is disconnected Support cloud upgrade 1x HDD, up to 10TB	I1117	150,00	125,00
NVR501-08B-IQ 	PRIME	8-ch NVR Decoding Capability: Smart Off: Smart Off: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30 Smart On: 2 x 12MP@30, 2 x 4K@30, 6 x 4MP@30, 8 x 3MP@30 Smart On: 2 x 12MP@30, 2 x 4K@30, 6 x 4MP@30, 8 x 3MP@30, 12 x 1080P@30, 16 x 720P@30 Support Ultra H.265/H.265/H.264 video formats Supports mainstream cameras of ONVIF conformance (Profile S, Profile G, Profile T) and RTSP protocols Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution Support HDMI and VGA simultaneous output Up to 16 Megapixels resolution recording ANR technology to enhance the storage reliability When the network is disconnected Support cloud upgrade 1 SATA Interface, up to 16 TB	I1118	168,00	140,00
NVR301-16S3 	EASY	16-ch NVR Rezolucija snimanja: 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p Ulazno/Izlazni saobraćaj: 64/48Mbps Video kompresija: Ultra 265, H.265, H.264 video kompresija, Video/audio izlazi: HDMI 4K resolution /VGA (FULL HD), Smart Funkcije:Face detection, Intrusion detection, Cross line detection, Audio detection ONVIF conformance: Profile S, Profile G, Profile T Pretraga snimka po smart funkcijama: Face search, Behavior search, Human Body search Dodatni ulazi: RJ45 mrežni ulaz, 2 x USB2.0,Audio out 3.5mm Mrežni protokoli: TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE Hard disk prostor: 1 sata HDD do 6TB kapaciteta Opšte: Napajanje 12V DC, Potrošnja 5W bez HDD, Radna temperatura: -10 °C ~ +55 °C, Dimenzije: 260mm × 240mm × 46mm (10.2"×9.4"×1.8 "), 1kg	I1116	138,00	115,00
NVR301-16B-IQ 	EASY	16-ch NVR Decoding Capability – Smart Off: 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 10 x 1080P@30, 16 x 720P@30 Smart On: 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30, 16 x 720P@30 Support Ultra 265/H.265/H.264 video formats Support mainstream cameras of ONVIF conformance (Profile S, Profile G, Profile T) and RTSP protocols Support HDMI and VGA simultaneous output Up to 12 Megapixels resolution recording ANR technology to enhance the storage reliability when the network is disconnected Support cloud upgrade	I1151	210,00	175,00

NVR501-16B**PRIME****I1047****16-ch NVR**

Rezolucija snimanja: 16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
 Ulazno/Izlazni saobraćaj: 80/64 Mbps
 Video kompresija: Ultra 265/H.265/H.264
 Video/audio izlazi: HDMI (4K) / HD, VGA
 Smart Funkcije: Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, UMD(Ultra Motion Detection)
 Statisticke analize: People counting
 Dodatni ulazi: 1xRJ45 mrežni ulaz, 1xUSB 2.0, 1x USB 3.0
 Mrežni protokoli: TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP
 Hard disk prostor: 1 sata HDD do 8TB kapaciteta
 Opšte: Napajanje 12V DC, Potrošnja 15W bez HDD,
 Radna temperatura: -10 °C ~ +55 °C,
 Dimenzije: 260mm × 222mm × 47mm, Težina 0,98Kg

216,00 180,00

Better Security. Better World.

NVR501-16B-IQ**PRIME****I1119****16-ch NVR**

Decoding Capability: Smart Off: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
 Smart On: 2 x 12MP@30, 2 x 4K@30, 6 x 4MP@30, 8 x 3MP@30, 12 x 1080P@30, 16 x 720P@30
 Support Ultra H.265/H.265/H.264 video formats
 Supports mainstream cameras of ONVIF conformance (Profile S, Profile G, Profile T) and RTSP protocols
 Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
 Support HDMI and VGA simultaneous output
 Up to 16 Megapixels resolution recording
 ANR technology to enhance the storage reliability
 When the network is disconnected
 Support cloud upgrade
 1 SATA Interface, up to 16 TB

228,00 190,00**NVR502-16B-IQ****PRIME****I1180****16-ch NVR**

Decoding Capability: Smart Off: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
 Smart On: 2 x 12MP@30, 2 x 4K@30, 6 x 4MP@30, 8 x 3MP@30, 12 x 1080P@30, 16 x 720P@30
 Support Ultra H.265/H.265/H.264 video formats
 Supports mainstream cameras of ONVIF conformance (Profile S, Profile G, Profile T) and RTSP protocols
 Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
 Support HDMI and VGA simultaneous output
 Up to 16 Megapixels resolution recording
 ANR technology to enhance the storage reliability
 When the network is disconnected
 Support cloud upgrade
 2 SATA Interface, up to 16 TB per HDD

264,00 220,00**NVR304-32X****PRIME****I1154****32-ch NVR**

32-KANALNI MREŽNI SNIMAČ
 Rezolucija snimanja: 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
 Ulazno/Izlazni saobraćaj: 384/384 Mbps
 Video kompresija: Ultra 265, H.265, H.264 video kompresija,
 Video/audio izlazi: HDMI1 (4K) / VGA I HDMI2 nezavisni izlazi, 1ch RCA
 Smart Funkcije: Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking, Object left behind, Object removed, Face search, Behavior search
 Statisticke analize: People counting
 ONVIF conformance: Profile S, Profile G, Profile T
 Dodatni ulazi: 2xRJ45 mrežni ulaz, 2xUSB 2.0, 1x USB 3.0, 1 x RS485, 1 x RS232, 16 x Alarmnih ulaza, 4 x Alarmnih izlaza
 Mrežni protokoli: P2P, UPnP, NTP, DHCP, PPPoE
 Hard disk prostor: 4 sata HDD do 10TB kapaciteta, RAID 1, 5
 Opšte: Napajanje 12V DC, Potrošnja 25W bez HDD,
 Radna temperatura: -10 °C ~ +55 °C,
 Dimenzije: 442mm × 426mm × 89mm, Težina 5,7Kg

600,00 500,00

NVR502-32E-IX-G



2 HDDs 32-Ch Network Video Recorder
Support Ultra H.265/H.265/H.264 video formats
Support 32-channel input
Support 2-ch HDMI, 2-ch VGA. HDMI up to 4K (3840x2160) resolution
Support HDMI and VGA independent output
Support up to 16 Megapixels resolution recording
Support ANR technology to enhance the storage reliability when the network is disconnected
Support SeekFree function: up to 16-ch with 3rd party IPC, up to 32-ch With UNV SIP/UMD IPC
Support external USB keyboards
Support Video Metadata, Diverse Algorithms by NVR
Support cloud upgrade

1140,00 950,00

IP KAMERE 2MPX

IPC3612LB-SF28-A



2MP Fixed IR Turret Network Camera
High quality image with 1080P, 1/2.8" CMOS sensor
1080P (1920 × 1080)@30/25 fps; 720P (1280 × 720)@30/25 fps
Ultra 265, H.265, H.264
Smart IR, up to 30 m (98.4 ft) IR distance
Day/night functionality
2D/3D DNR (digital noise reduction)
IP67 protection
Supports PoE power supply
3-axis

I1144 66,00 55,00

IPC322LB-SF28-A



2MP Vandal-resistant Network IR Fixed Dome Camera
High quality image with 2MP, 1/2.8" CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264
Smart IR, up to 30m (98ft) IR distance
Day/night functionality
2D/3D DNR (Digital Noise Reduction)
IP67 protection
IK10 vandal resistant
Support PoE power supply
2-Axis

I1174 56,40 47,00

IPC322LB-AF28WK-G



2MP WIFI Fixed Dome Network Camera
High quality image with 2MP, 1/2.9" CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
IK10 vandal resistant
IP67 protection
3-Axis

I1008 86,40 72,00

IPC322LB-DSF28K-G



High quality image with 2MP, 1/2.7"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
IK10 vandal resistant
IP67 protection
Support PoE power supply

I1177 72,00 60,00

IPC3622LE-ADF28K-WP



2MP ColorHunter Wise-ISP Fixed Warm Light Turret Network Camera
High quality image with 2MP, 1/2.7" CMOS sensor and F1.0 large aperture lens
2MP (1920 × 1080)@30/25 fps; 720P (1280 × 720)@30/25 fps
Ultra 265, H.265, H.264, MJPEG
Support ColorHunter with Wise-ISP technology, deeply optimizing color, Detail, and smear effects in extremely low-light scenes
120 dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
White Light, up to 30 m (98 ft) warm light distance
Supports up to 512 GB Micro SD Card
IP67 protection
Support PoE power supply
3-Axis

I1112 104,40 87,00


IPC3612LE-ADF28KC-WL



2MP HD ColorHunter IR Fixed Eyeball Network Camera
High quality image with 2MP, 1/2.8"CMOS sensor
2MP (1920*1080) @30/25fps; 720P (1280*720) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic & Speaker
Smart IR, up to 30m (98ft) IR distance
White Light, up to 30m (98ft) white light distance
Supports 128 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

I1038 110,40 92,00

IPC3532LB-ADZK-G-BLACK

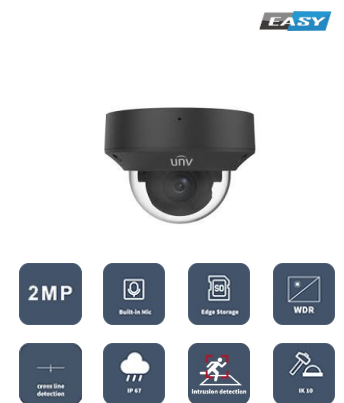

2MP HD IR VF (2.8 ~ 12mm) Dome Network Camera
High quality image with 2MP, 1/2.7"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 40m (131ft) IR distance
Supports 128 G Micro SD card
IK10 vandal resistant
IP67 protection
Support PoE power supply
3-Axis

I1092 156,00 130,00

BULLET IP KAMERE 2MPX

IPC2122LB-SF28-A



2MP Mini Fixed Bullet Network Camera
High quality image with 2MP, 1/2.8"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264
Smart IR, up to 30m (98ft) IR distance
Day/night functionality
2D/3D DNR (Digital Noise Reduction)
IP67 protection
Support PoE power supply
3-Axis

I1143 55,20 46,00

IPC2122LB-SF40-A

					
      					
		2MP Mini Fixed Bullet Network Camera High quality image with 2MP, 1/2.8"CMOS sensor 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps Ultra 265, H.265, H.264 Smart IR, up to 30m (98ft) IR distance Day/night functionality 2D/3D DNR (Digital Noise Reduction) IP67 protection Support PoE power supply 3-Axis		11173	
				55,20	46,00

IPC2122LB-AF28WK-G

					
       					
		2MP HD WIFI Bullet Network Camera High quality image with 2MP, 1/2.9"CMOS sensor 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps Ultra 265, H.265, H.264, MJPEG Built-in Mic Smart IR, up to 30m (98ft) IR distance Supports 128 G Micro SD card IP67 protection 3-Axis		11009	
				78,00	65,00

IPC2122LB-AF40WK-G BLACK

					
       					
		2MP HD WIFI Bullet Network Camera High quality image with 2MP, 1/2.9"CMOS sensor 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps Ultra 265, H.265, H.264, MJPEG Built-in Mic Smart IR, up to 30m (98ft) IR distance Supports 128 G Micro SD card IP67 protection 3-Axis		11093	
				78,00	65,00

IPC2122LB-ADF40KM-G

					
       					
		2MP HD WDR Fixed IR Bullet Network Camera High quality image with 2MP, 1/2.9"CMOS sensor 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps Ultra 265, H.265, H.264, MJPEG 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic Smart IR, up to 30m (98ft) IR distance Supports 128 G Micro SD card Support PoE power supply 3-Axis		11175	
				72,00	60,00

IPC2122LB-AF28K-WL

					
       					
		2MP HD ColorHunter Mini Fixed Bullet Network Camera High quality image with 2MP, 1/2.9"CMOS sensor 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps Ultra H.265,H.265, H.264 Built-in Mic Warm Light, up to 30m (98ft) warm light distance 2D/3D DNR (Digital Noise Reduction) Support 128GB Micro SD card IP67 protection Support PoE power supply 3-Axis		11050	
				99,00	82,50

IPC2312LE-ADF28KM-WP

  2MP Built-In Mic Edge Storage Wise-ISP F1.0 Large Aperture Ultra Motion Detection IP 67 WDR			2MP ColorHunter with Wise-ISP Fixed Bullet Network Camera High quality image with 2MP, 1/2.7"CMOS sensor and F1.0 large aperture lens 2MP (1920*1080) @30/25fps; 720P (1280*720) @30/25fps; Ultra 265, H.265, H.264, MJPEG Colorhunter with Wise-ISP technology ensures 24-hour full-color images 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic White Light, up to 30m warm light distance Supports 512 GB Micro SD card IP67 protection Support PoE power supply 3-Axis		104,40	87,00
I1111						

IPC2122LE-ADF28KMC-WL

  2MP ColorHunter Edge Storage Built-In Mic POE IP 67 WDR Corridor Mode			2MP HD ColorHunter Mini IR Fixed Bullet Network Camera High quality image with 2MP, 1/2.8"CMOS sensor 2MP (1920*1080) @30/25fps; 720P (1280*720) @30/25fps; Ultra 265, H.265, H.264, MJPEG 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic & Speaker Smart IR, up to 30m (98ft) IR distance White Light, up to 30m (98ft) white light distance Supports 128 G Micro SD card IP67 protection Support PoE power supply 3-Axis		110,40	92,00
I1028						

BULLET IP KAMERE 3MPX

IPC2123LB-AF28KM-G

  3MP Built-In Mic Edge Storage MIC Smart IR IP 67 Ultra H.265 Corridor Mode			3MP HD Fixed IR Bullet Network Camera High quality image with 3MP, 1/2.7"CMOS sensor 3MP (2304*1296)@30/25fps; 2MP (1920*1080)@30/25fps; Ultra 265, H.265, H.264, MJPEG Support 9:16 Corridor Mode Built-in Mic Smart IR, up to 30m (98ft) IR distance Supports 128 G Micro SD card IP67 protection Support PoE power supply 3-Axis		86,40	72,00
I1037						

DOME IP KAMERE 4MPX

IPC3614LB-SF28-A

  4MP H.265 Smart IR IP 67 POE MIC Smart Search			4MP Fixed Dome Network Camera High quality image with 4MP, 1/3"CMOS sensor 4MP (2560*1440)@25/20fps; 3MP (2304*1296)@30/25fps; 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps Ultra 265, H.265, H.264, MJPEG Smart IR, up to 30m (98ft) IR distance Support PoE power supply 3-Axis		81,60	68,00
I1030						

IPC3614LB-AF28K-A2

 NOVO  4MP Built-In Mic Edge Storage IP 67 POE MIC Human Body Detection 2.0 Smart IR			4MP IR Eyeball Network Camera High quality image with 4 MP, 1/3.0" CMOS sensor 4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps Supports accurate human body detection 2.0 Ultra 265, H.265, H.264 Built-in mic Smart IR, up to 30 m (98.4 ft) IR distance Day/night functionality 2D/3D DNR (digital noise reduction) MicroSD, up to 512 GB DC 12 V, PoE (IEEE 802.3af) power supply IP67 protection 3-axis		86,40	72,00
I1178						

IPC324LB-AF28K-A2 NOVO EASY  4MP Built-in Mic Edge Storage IP 67 POE IK 10 Human body detection 2.0 Smart IR	4MP Fixed IR Dome Network Camera High quality image with 4 MP, 1/3.0" CMOS sensor 4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps Supports accurate human body detection 2.0 Ultra 265, H.265, H.264 Built-in mic Smart IR, up to 30 m (98.4 ft) IR distance Day/night functionality 2D/3D DNR (digital noise reduction) MicroSD, up to 512 GB DC 12 V, PoE (IEEE 802.3af) power supply IP67 protection IK10 vandal resistant 2-axis 11010 86,40 72,00
IPC3624LE-ADF28K-WP EASYSSTAR  4MP Wise-ISP Ultra Motion Detection Built-in Mic Edge Storage IP 67 F1.0 Large Aperture 1/1.8" Large Sensor	4MP ColorHunter Wise-ISP Fixed Warm Light Turret Network Camera High quality image with 4MP, 1/1.8"CMOS sensor and F1.0 large aperture lens 4MP (2688 × 1520)@ 25/20fps; 4MP (2560 × 1440)@ 25/20fps; 3MP (2304 × 1296) @30/25fps; 2MP (1920 × 1080) @30/25fps Ultra 265, H.265, H.264, MJPEG Support ColorHunter with Wise-ISP technology, deeply optimizing color, detail, And smear effects in extremely low-light scenes 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic White Light, up to 30m (98ft) warm light distance Supports 512 GB Micro SD card IP67 protection Support PoE power supply 3-Axis 11086 128,40 107,00
IPC3524LE-ADF28K-WP EASYSSTAR  4MP Wise-ISP 1/1.8" Large Sensor F1.0 Large Aperture Ultra Motion Detection Built-in Mic IP 67 IK 10	4MP ColorHunter Wise-ISP Fixed Dome Network Camera High quality image with 4MP, 1/1.8"CMOS sensor and F1.0 large aperture lens 4MP (2688 × 1520)@ 25/20fps; 4MP (2560 × 1440)@ 25/20fps; 3MP (2304 × 1296) @30/25fps; 2MP (1920 × 1080) @30/25fps Ultra 265, H.265, H.264, MJPEG Support ColorHunter with Wise-ISP technology, deeply optimizing color, detail, and smear effects in extremely low-light scenes 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic Supports 512 GB Micro SD card IP67 protection IK10 protection Support PoE power supply 3-Axis 11084 128,40 107,00
IPC3614LE-ADF28K-H EASYSSTAR  4MP Edge Storage Built-in Mic Ultra Motion Detection WDR Intruder detection Cross Line Detection IP 67	4MP EasyStar Fixed IR Turret Network Camera High quality image with 4MP, 1/3" CMOS sensor 4MP (2688 × 1520)@25/20 fps; 4MP (2560 × 1440)@25/20 fps; 3MP (2304 × 1296)@30/25 fps; 2MP (1920 × 1080)@30/25 fps Ultra 265, H.265, H.264, MJPEG Easystar technology ensures high image quality in low illumination environment 120 dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic Smart IR, up to 30 m (98 ft) IR distance Supports up to 512 GB Micro SD Card IP67 protection Support PoE power supply 3-Axis 11137 147,60 123,00
IPC3614LE-ADF28KC-WL EASYSSTAR  4MP Speaker Built-in Mic ColorHunter Edge Storage IP 67 WDR Corridor Mode	4MP HD ColorHunter IR Fixed Eyeball Network Camera High quality image with 4MP, 1/3"CMOS sensor 4MP (2688 × 1520)@ 25/20fps; 4MP (2560 × 1440)@ 25/20fps; 3MP (2304 × 1296) @30/25fps; 2MP (1920 × 1080) @30/25fps; Ultra 265, H.265, H.264, MJPEG 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic & Speaker Smart IR, up to 30m (98ft) IR distance White Light, up to 30m (98ft) white light distance Supports 128 G Micro SD card IP67 protection Support PoE power supply 3-Axis 11040 150,00 125,00

IPC3614SB-ADF28KMC-10




i1194

4MP HD Intelligent Light and Audible Warning Fixed Eyeball Network Camera
High quality image with 4MP, 1/2.7"CMOS sensor
4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Supports sound and light alarm linkage.When Smart intrusion prevention is triggered
The camera links sound alarm and light linkage.
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic and Speaker
Smart IR, up to 30m (98ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply

156,00 130,00

IPC3614SB-ADF40KMC-10

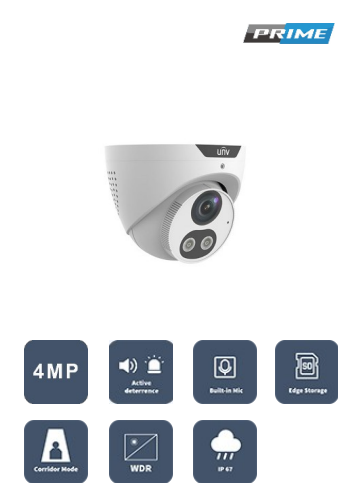

i1094

4MP HD Intelligent Light and Audible Warning Fixed Eyeball Network Camera
High quality image with 4MP, 1/2.7"CMOS sensor
4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Supports sound and light alarm linkage.When Smart intrusion prevention is triggered , the camera links sound alarm and light linkage.
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic and Speaker
Smart IR, up to 30m (98ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply

156,00 130,00

IPC354SB-ADNF28K-10




i1087

4MP LightHunter Fixed IR Dome Network Camera
High quality image with 4MP, 1/2.7"CMOS sensor
4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps;
3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and,
Motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 30m (98 ft) IR distance
Supports 512 G Micro SD card
Cable-free
Support PoE power supply

180,00 150,00

IPC3534LB-ADZK-G

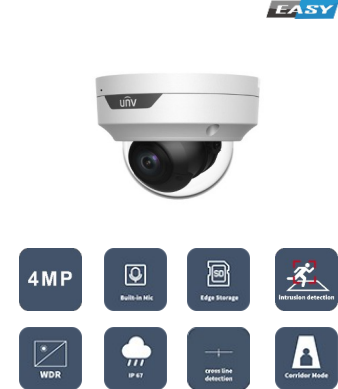

i1166

4MP HD IR VF (2.8 ~ 12mm) Dome Network Camera
High quality image with 4MP, 1/3"CMOS sensor
4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296)@ 30/25fps;2MP (1920*1080)@30/25fps
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 40m (131ft) IR distance
Supports 256 G Micro SD card
IK10 vandal resistant
IP67 protection
Support PoE power supply
3-Axis

180,00 150,00

BULLET IP KAMERE 4MPX

IPC2124LB-SF28-A



4MP Fixed IR Mini Bullet Network Camera
High quality image with 4MP, 1/3.0"CMOS sensor
4MP (2560*1440)@25/20fps; 3MP (2304*1296)@25/20fps; 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
H.265, H.264
Smart IR, up to 30m (98ft) IR distance
Day/night functionality
2D/3D DNR (Digital Noise Reduction)
IP67 protection
DC12V or PoE(IEEE 802.3af) power supply
3-Axis

I1011 81,60 68,00

IPC2124LB-SF40-A



4MP Fixed IR Mini Bullet Network Camera
High quality image with 4MP, 1/3.0"CMOS sensor
4MP (2560*1440)@25/20fps; 3MP (2304*1296)@25/20fps; 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
H.265, H.264
Smart IR, up to 30m (98ft) IR distance
Day/night functionality
2D/3D DNR (Digital Noise Reduction)
IP67 protection
DC12V or PoE(IEEE 802.3af) power supply
3-Axis

I1081 84,00 70,00

IPC2124LB-AF28K-A2



4MP Fixed IR Bullet Network Camera
High quality image with 4 MP, 1/3.0" CMOS sensor
4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
Supports accurate human body detection 2.0
Ultra 265, H.265, H.264
Built-in mic
Smart IR, up to 30 m (98.4 ft) IR distance
Day/night functionality
2D/3D DNR (digital noise reduction)
MicroSD, up to 512 GB
DC 12 V, PoE (IEEE 802.3af) power supply
IP67 protection
3-axis

I1155 86,40 72,00

IPC2124LB-ADF28KM-H



4MP Mini Fixed Bullet Network Camera
High quality image with 4MP, 1/2.9"CMOS sensor
4MP (2560*1440)@25/20fps; 3MP (2304*1296)@30/25fps;
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
Support PoE power supply
120dB WDR
3-Axis

I1068 114,00 95,00

IPC2124LB-ADF40KM-H



4MP Mini Fixed Bullet Network Camera
High quality image with 4MP, 1/2.9"CMOS sensor
4MP (2560*1440)@25/20fps; 3MP (2304*1296)@30/25fps;
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Built-in Mic
Ultra 265, H.265, H.264, MJPEG
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
Support PoE power supply
120dB WDR
3-Axis

I1075 116,40 97,00

IPC2314LE-ADF28KM-WP   4MP Wise-ISP Built-in Mic Edge Storage 1/1.8" Large Sensor F1.0 Large Aperture Ultra Motion Detection IP 67		4MP ColorHunter with Wise-ISP Fixed Bullet Network Camera High quality image with 4MP, 1/1.8" CMOS sensor and F1.0 large aperture lens 4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps; Ultra 265, H.265, H.264, MJPEG Colorhunter with Wise-ISP technology ensures 24-hour full-color images 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic White Light, up to 30m warm light distance Supports 512 GB Micro SD card IP67 protection Support PoE power supply 3-Axis	11085	128,40	107,00
IPC2314LE-ADF40KM-WP    4MP Wise-ISP Built-in Mic Edge Storage 1/1.8" Large Sensor F1.0 Large Aperture Ultra Motion Detection IP 67		4MP ColorHunter with Wise-ISP Fixed Bullet Network Camera High quality image with 4MP, 1/1.8" CMOS sensor and F1.0 large aperture lens 4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps; Ultra 265, H.265, H.264, MJPEG Colorhunter with Wise-ISP technology ensures 24-hour full-color images 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic White Light, up to 30m warm light distance Supports 512 GB Micro SD card IP67 protection Support PoE power supply 3-Axis	11184	128,40	107,00
IPC2124LE-ADF28KMC-WL   4MP Built-in Mic Edge Storage Speaker Corridor Mode WDR IP 67 ColorHunter		4MP ColorHunter Fixed Bullet Network Camera High quality image with 4 MP, 1/3.0" CMOS sensor 4 MP (2688 × 1520)@25/20 fps; 4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps Ultra 265, H.265, H.264, MJPEG 120 dB true WDR technology enables clear image in strong light scene Supports 9:16 corridor mode Built-in mic and speaker Smart IR, up to 30 m (98.4 ft) IR distance White light, up to 30 m (98.4 ft) white light distance MicroSD, up to 512 GB IP67 protection Supports PoE power supply 3-axis	11148	132,00	110,00
IPC2124LE-ADF28KM-G   4MP Edge Storage Built-in Mic Intrusion Detection Cross Line Detection Loositer WDR IP 67		4MP HD Mini IR Fixed Bullet Network Camera High quality image with 4MP, 1/3" CMOS sensor 4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps; Ultra 265, H.265, H.264, MJPEG Easystar technology ensures high image quality in low illumination environment 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic Smart IR, up to 50m (164ft) IR distance Supports 256 G Micro SD card IP67 protection Support PoE power supply 3-Axis	11027	147,60	123,00
IPC2314LE-ADF28KM-WL   4MP Edge Storage ColorHunter Built-in Mic WDR Intrusion Detection Cross Line Detection IP 67		4MP HD ColorHunter Fixed Bullet Network Camera High quality image with 4MP, 1/1.8" CMOS sensor and F1.0 large aperture lens 4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps; Ultra 265, H.265, H.264, MJPEG Colorhunter technology ensures 24-hour full-color images 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic White Light, up to 30m white light distance Supports 128 GB Micro SD card IP67 protection Support PoE power supply 3-Axis	11029	159,60	133,00

IPC2124SB-ADF28KM-IO





4MP

Built-in Mic

IP 67

Edge Storage

Intrusion Detection

Ultra Motion Detection

WDR

LightHunter

	4MP HD Intelligent LightHunter IR Fixed Bullet Network Camera High quality image with 4MP, 1/3"CMOS sensor 4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps Ultra 265, H.265, H.264, MJPEG Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle Intelligent People Flow Counting and Crowd Density Monitoring LightHunter technology ensures ultra-high image quality in low illumination environment 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic Smart IR, up to 40m (131ft) IR distance Supports 512 G Micro SD card IP67 protection Support PoE power supply	162,00	135,00
11088			

IPC2314SB-ADF60KM-IO





4MP

Built-in Mic

90 IR distance

IP 67

WDR

Smart Intrusion Prevention

LightHunter

	4MP HD Intelligent 80m IR Fixed Bullet Network Camera High quality image with 4MP, 1/2.7"CMOS sensor 4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps; Ultra 265, H.265, H.264, MJPEG Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle And non-motor vehicle Intelligent People Flow Counting and Crowd Density Monitoring 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in 2 Mic Smart IR, up to 80m (262 ft) IR distance Supports 256 G Micro SD card IP67 protection	192,00	160,00
11097			

IPC2314SB-ADF40KM-IO





4MP

Built-in Mic

LightHunter

POE

WDR

Ultra Motion Detection

Intrusion Detection

IP 67

	4MP LightHunter Fixed IR Bullet Network Camera High quality image with 4MP, 1/2.7"CMOS sensor 4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps Ultra 265, H.265, H.264, MJPEG Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle Intelligent People Flow Counting and Crowd Density Monitoring 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in 2 Mic Smart IR, up to 80m (262 ft) IR distance Supports 512 G Micro SD card IP67 protection	192,00	160,00
11167			

IPC2324LE-ADZK-DL3







4MP

Wise-ISP

Smart Light

Built-in Mic

120 dB WDR

Ultra Motion Detection

Corridor Mode

IP 67

	4MP WDR Bullet Varifocal Network Camera High quality image with 4 MP, 1/3.0" CMOS sensor 4 MP (2688 × 1520)@25/20 fps; 4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps Ultra 265, H.265, H.264, MJPEG (Sub Stream Only) Wise-ISP technology ensures 24-hour full-color images Support cross line, intrusion detection (based on human body detection) Support ultra motion detection (human/ vehicle detection) 120 dB true WDR technology enables clear image in strong light scene Built in mic Supports 9:16 corridor mode Smart IR, up to 50 m (164.0 ft) IR distance Warm light, up to 50 m (164.0 ft) warm light distance IP67 protection MicroSD, up to 512 G	198,00	165,00
11193			

4MP Recognition Of Vehicle License Plate Bullet IP Camera (2.8 ~ 12mm)

Features

Optics

Built-in lens supports motorized zoom to adapt to different scenes and allows for easy installation.

Automatic gain control, white balance, and WDR for various light conditions.

Compression

Supports triple streams.

Advanced H.265 encoding technology improves compression efficiency.

Custom OSD allows various vehicle information to be overlaid on the video image.

Functions

Built-in vehicle and license plate recognition algorithm can recognize

standard license plates of multiple countries.

Supports capturing vehicle head only.

Supports plate allowlist and blacklist configuration.

Supports vehicle access control when connected to a barrier.

Supports Micro SD cards of up to 256GB.

Automatic network replenishment (ANR) allows to automatically

store video to SD card in case of network disconnection.

Supports audio collection and intercom.

I1120

Network

Network auto-adaptability ensures smooth live video in relatively bad

network conditions such as packet loss.

Supports SNMP.

Supports UNP for NAT traversal between public and private networks.

Supports integration with the third party via SDK or HTTP.

Network Security

Supports authorized user access by password. Weak password detection and account lock-up when failed login attempts reach the Upper limit enhance password security.

Supports Web access via HTTPS.

RTSP authentication prevents unauthorized video stream requests.

IP address filtering prevents illegal access from untrusted IP addresses.

Gateway ARP protection prevents MAC address spoofing.

Structure

Supports DC 12V and PoE (802.3at) power supplies.

Cast aluminum body offers excellent heat dissipation.

3-axis mounting bracket for various installation scenarios.

A junction box on the mounting bracket is convenient for storing tail cables.

IP67 and IK10 protection.

840,00 700,00



4MP

Edge Storage

IP 67

50 IR distance

H.265

H.265

POE

DOME IP KAMERE 5MPX**IPC3615LB-SF28-A**

EASY



5MP

IP 67

HLC

H.265

Smart IR

IP 67

Smart Search

POE

5MP Fixed IR Turret Network Camera

High quality image with 5 MP, 1/3.0" CMOS sensor

5 MP (2592 × 1944)@20 fps; 4 MP (2560 × 1440)@20 fps;

3 MP (2304 × 1296)@20 fps; 1080P (1920 × 1080)@30/25 fps

Ultra 265, H.265, H.264, MJPEG

I1147

Smart IR, up to 30 m (98.4 ft) IR distance

86,40 72,00

Day/night functionality

2D/3D DNR (digital noise reduction)

IP67 protection

DC 12 V, PoE (IEEE 802.3af) power supply

3-axis

IPC3635LB-ADZK-G

EASY



5MP

Built-in Mic

Edge Storage

WDR

Corridor Mode

Cross Line Detection

Intrusion Detection

IP 67

5MP HD IR VF Eyeball Network Camera

High quality image with 5MP, 1/2.7" CMOS sensor

5MP (2880 × 1620)@ 25/20fps; 4MP (2560 × 1440)@ 25/20fps;

3MP (2304 × 1296)@ 30/25fps; 2MP (1920 × 1080)@30/25fps

Ultra 265, H.265, H.264, MJPEG

120dB true WDR technology enables clear image in strong light scene

I1139

Support 9:16 Corridor Mode

192,00 160,00

Built-in Mic

Smart IR, up to 40m (131ft) IR distance

Supports 256 G Micro SD card

IP67 protection

Support PoE power supply

3-Axis

IPC3615SS-ADF28K-I1

         	5MP HD Intelligent LightHunter IR Fixed Turret Dome Network Camera High quality image with 5MP, 1/2.7"CMOS sensor 5MP (2880*1620)@ 30/25(default)fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps Ultra 265, H.265, H.264, MJPEG Intelligent perimeter protection, include cross line, intrusion, enter area, leave area detection Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle Intelligent People Flow Counting and Crowd Density Monitoring Auto Scene Match (ASM) (WDR only) LightHunter technology ensures ultra-high image quality in low illumination environment 130dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic Smart IR, up to 40m (131ft) IR distance Supports 256 G Micro SD card IP67 protection	11105	192,00	160,00

IPC3615SE-ADF28KM-WL-I0

        	5MP HD Intelligent ColorHunter Fixed Eyeball Network Camera High quality image with 5MP, 1/2.7"CMOS sensor 5MP (2880*1620)@30/25fps; 4MP (2560*1440)@30/25fps;3MP (2304*1296)@30/25fps; 2MP (1920*1080)@30/25fps; Ultra 265, H.265, H.264, MJPEG Intelligent perimeter protection, include cross line, intrusion, enter area, leave area detection Based on target classification, smart intrusion prevention significantly reduce False alarm caused by leaves, Birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle Intelligent People Flow Counting and Crowd Density Monitoring Colorhunter technology ensures 24-hour full-color images 120dB true WDR technology enables clear image in strong light scene Support 9:16 corridor Mode Support built-in Mic Support 256 G Micro SD card IP67 protection Support PoE power supply	11161	232,00	197,50

BULLET IP KAMERA 5MPX

IPC2125LB-SF28-A

        	5MP Fixed IR Bullet Network Camera High quality image with 5 MP, 1/3.0" CMOS sensor 5 MP (2592 × 1944)@20 fps; 4 MP (2560 × 1440)@20 fps; 3 MP (2304 × 1296)@20 fps; 1080P (1920 × 1080)@30/25 fps Ultra 265, H.265, H.264, MJPEG Smart IR, up to 30 m (98.4 ft) IR distance Day/night functionality 2D/3D DNR (digital noise reduction) IP67 protection DC 12 V, PoE (IEEE 802.3af) power supply 3-axis	11145	86,40	72,00


IPC2125LB-SF40-A

        	5MP Fixed IR Bullet Network Camera High quality image with 5 MP, 1/3.0" CMOS sensor 5 MP (2592 × 1944)@20 fps; 4 MP (2560 × 1440)@20 fps; 3 MP (2304 × 1296)@20 fps; 1080P (1920 × 1080)@30/25 fps Ultra 265, H.265, H.264, MJPEG Smart IR, up to 30 m (98.4 ft) IR distance Day/night functionality 2D/3D DNR (digital noise reduction) IP67 protection DC 12 V, PoE (IEEE 802.3af) power supply 3-axis	11146	86,40	72,00

IPC2125LE-ADF28KM-G  		5MP HD Mini IR Fixed Bullet Network Camera High quality image with 5MP, 1/2.7"CMOS sensor 5MP (2880*1620)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps; Ultra 265, H.265, H.264, MJPEG IC domet: do 50m Easystar technology ensures high image quality in low illumination environment 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic Smart IR, up to 50m (164ft) IR distance Supports 256 G Micro SD card IP67 protection Support PoE power supply 3-Axis		11041	159,60	133,00
       						
IPC2125SB-ADF40KMC-IO  		5MP HD Intelligent Light and Audible Warning Fixed Bullet Network Camera High quality image with 5MP, 1/2.7"CMOS sensor 5MP (2880*1620)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps Ultra 265, H.265, H.264, MJPEG Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle Supports sound and light alarm linkage.When Smart intrusion prevention is triggered, The camera links sound alarm and light linkage. 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic and Speaker Smart IR, up to 30m (98ft) IR distance Supports 256 G Micro SD card IP67 protection Support PoE power supply		11095	168,00	140,00
      						
IPC2125SB-ADF28KM-IO  		5MP LightHunter Fixed IR Bullet Network Camera High quality image with 5MP, 1/2.7"CMOS sensor 5MP (2880*1620)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps Ultra 265, H.265, H.264, MJPEG Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle Intelligent People Flow Counting and Crowd Density Monitoring LightHunter technology ensures ultra-high image quality in low Illumination environment 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic Smart IR, up to 40m (131ft) IR distance Supports 512 G Micro SD card IP67 protection Support PoE power supply		11110	168,00	140,00
       						
IPC2125SB-ADF28KM-IO BLACK  		5MP LightHunter Fixed IR Bullet Network Camera High quality image with 5MP, 1/2.7"CMOS sensor 5MP (2880*1620)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps Ultra 265, H.265, H.264, MJPEG Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle Intelligent People Flow Counting and Crowd Density Monitoring LightHunter technology ensures ultra-high image quality in low Illumination environment 120dB true WDR technology enables clear image in strong light scene Support 9:16 Corridor Mode Built-in Mic Smart IR, up to 40m (131ft) IR distance Supports 512 G Micro SD card IP67 protection Support PoE power supply		11106	168,00	140,00
       						

IPC2125SB-ADF28KMC-IO

PRIME



5MP Tri-Guard Fixed Dual-light Bullet Network Camera

High quality image with 5 MP, 1/2.7" CMOS sensor

5 MP (2880 × 1620)@30/25 fps; 4 MP (2560 × 1440)@30/25 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps

Ultra 265, H.265, H.264, MJPEG

Smart intrusion prevention, including cross line, intrusion, enter area, leave area detection

Intelligent intrusion prevention system based on target classification significantly reduces false alarms caused by leaves, birds, and lights, accurately focusing on humans, vehicles, and non-motor vehicles

11156 Supports sound and light alarm linkage. When smart intrusion prevention is triggered, the camera links sound alarm and light linkage

168,00 140,00

120 dB true WDR technology enables clear image in strong light scene

Supports 9:16 corridor mode

Built-in mic and speaker

Smart IR, up to 30 m (98.4 ft) IR distance

MicroSD, up to 512 GB

IP67 protection

Supports PoE power supply

IPC2325LB-ADZK-H

EASY



5MP HD IR VF (2.8 ~ 12mm) Bullet Network Camera

High quality image with 5MP, 1/2.7" CMOS sensor

5MP (2880*1620)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296)@30/25fps; 2MP (1920*1080) @30/25fps;

Built-in Mic

Ultra 265, H.265, H.264, MJPEG

11069 120dB true WDR technology enables clear image in strong light scene

192,00 160,00

Support 9:16 Corridor Mode

Smart IR, up to 50m (164ft) IR distance

Supports 256 G Micro SD card


IP67 protection

Support PoE power supply

3-Axis

IPC2315SB-ADF40KM-IO

PRIME



5MP LightHunter Fixed IR Bullet Network Camera

High quality image with 5MP, 1/2.7" CMOS sensor

5MP (2880*1620)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296)@30/25fps; 2MP (1920*1080) @30/25fps

Ultra 265, H.265, H.264, MJPEG

Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection

Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor

11096 Vehicle and non-motor vehicle

198,00 165,00

Intelligent People Flow Counting and Crowd Density Monitoring

120dB true WDR technology enables clear image in strong light scene

Support 9:16 Corridor Mode


Built-in 2 Mic

Smart IR, up to 80m (262 ft) IR distance

Supports 512 G Micro SD card

IP67 protection

IPC2225SE-DF40K-WL-IO



5MP ColorHunter Fixed Warm Light Bullet Network Camera

High quality image with 5 MP, 1/2.7" CMOS sensor

5 MP (2880 × 1620)@30/25 fps; 4 MP (2560 × 1440)@30/25 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps

Ultra 265, H.265, H.264, MJPEG

Intelligent perimeter protection, including cross line, intrusion, enter area, leave area detection

Based on target classification, smart intrusion prevention significantly reduces false alarm caused by leaves, birds and lights, accurately focusing on human, motor vehicle and non-motor vehicle

11158 Intelligent people flow counting and crowd density monitoring

261,60 218,00

ColorHunter technology ensures 24-hour full-color images

120 dB true WDR technology enables clear image in strong light scene

Supports 9:16 corridor mode

Alarm I/O: 1/1, audio I/O: 1/1

MicroSD, up to 512 GB

IK10 vandal resistant and IP67 protection

Supports PoE power supply

DOME IP KAMERE 8MPX

IPC328SB-ADF28K-10




4K

Built-in Mic

Edge Storage

Light Hunter

Deep Face Capture

Deep Perimeter

Ultra Motion Detection

IK 10

11043

8MP HD Intelligent IR Fixed Dome Network Camera

High quality image with 8MP, 1/2.7"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps;
4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Intelligent perimeter protection, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Alarm:1 in/1 out, Audio: 1 in/1 out
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 256 G Micro SD card
IK10 vandal resistant and IP67 protection

229,20191,00

IPC3618LE-ADF28K-G




4K

Intrusion detection

Cross Line detection

Anti-star

Built-in Mic

Edge Storage

WDR

IP 67

11162

4K HD IR Fixed Eyeball Network Camera

High quality image with 8MP, 1/2.7"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps; 4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Easystar technology ensures high image quality in low illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

216,00180,00

BULLET IP KAMERE 8MPX

IPC2318LE-ADF28KM-WP




4K

Built-in Mic

Edge Storage

Ultra Motion Detection

Wide-ISP

5.1/8" Large Sensor

F1.0 Large Aperture

IP 67

11113

8MP ColorHunter Wise-ISP Warm Light Bullet Network Camera

High quality image with 8MP, 1/1.8"CMOS sensor and F1.0 large aperture lens
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps; 4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Colorhunter with Wise-ISP technology ensures 24-hour full-color images
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
White Light, up to 30m warm light distance
Supports 512 GB Micro SD card
IP67 protection
Support PoE power supply
3-Axis

210,00175,00

IPC2128LE-ADF28KM-G




4K

Built-in Mic

Edge Storage

Intrusion detection

WDR

IP 67

Cross Line detection

EasyStar

11012

4K 8MP Mini Fixed Bullet Network Camera

High quality image with 8MP, 1/2.7"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps; 4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Easystar technology ensures high image quality in low illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 50m (164ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

211,20176,00

IPC2128SB-ADF28KMC-IO



11090

8MP Tri-Guard Fixed Dual-Light Bullet Network Camera

High quality image with 8MP, 1/2.7"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps; 4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Built-in Speaker
Smart IR, up to 30m (98ft) IR distance
Supports 512 G Micro SD card
IP67 protection

245,00 205,00

IPC2328SB-DZK-IO



11138

8MP HD Intelligent LighterHunter IR VF (2.8 ~ 12mm) Bullet Network Camera

High quality image with 8MP, 1/2.8"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps;
4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, Birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
LightHunter technology ensures ultra-high image Quality in low illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Alarm:1 in/1 out, Audio: 1 in/1 out
Smart IR, up to 50m (164ft) IR distance
Supports 256 G Micro SD card
IK10 vandal resistant
IP67 protection
Support PoE power supply

264,00 220,00

IPC2328SB-ADZKM-DL-11



11192


8MP Dual-Light Varifocal Bullet Network Camera

High quality image with 8 MP, 1/2.7" CMOS sensor
8 MP (3840 × 2160)@25/24 fps; 5 MP (3072 × 1728)@30/25 fps; 4 MP (2560 × 1440)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, including cross line, intrusion, enter area, leave area detection
Intelligent intrusion prevention system based on target classification significantly reduces false alarms caused by leaves, birds, and lights, accurately focusing on humans, vehicles, and non-motor vehicles
Support ultra motion detection
Intelligent people flow counting and crowd density monitoring
120 dB true WDR technology enables clear image in strong light scene
Supports 9:16 corridor mode
Alarm I/O: 1/1, audio I/O: 1/1
MicroSD, up to 512 GB
IK10 vandal resistant and IP67 protection

420,00 350,00

Uniarch

Uho-S2




11091

High quality image with 2MP, 1/3"CMOS sensor
2MP (1920*1080)@25/20fps; 720P (1280*720) @25/20fps
Ultra 265, H.265, H.264
Built-in Mic & Speaker, support two-way audio, offer better interaction
IR night vision, up to 10m (33ft) IR distance
Support 256 G Micro SD card
Wi-Fi connection and easy installation

36,00 30,00

Uho-S3E-M3




I1051	High quality image with 3MP, 1/3" CMOS sensor		
	3MP (2304*1296)@25/20fps; 2MP (1920*1080)@30/25fps;720P (1280*720) @30/25/fps		
	Ultra 265, H.265, H.264		
	Built-in Mic & Speaker, support two-way audio,offer better interaction	42,00	35,00
	IR night vision, up to 10m (33ft) IR distance		
	Support 256 G Micro SD card		
	Wi-Fi connection and easy installation		

IPC-B122-APF28




I1140	High quality image with 1080P, 1/2.9" CMOS sensor		
	1080P (1920 × 1080)@25/20 fps; 720P (1280 × 720)@25/20 fps		
	Ultra 265, H.265, H.264		
	2D/3D DNR (digital noise reduction)		
	ROI (region of interest) ensures image quality in areas of interest	43,20	36,00
	With low bandwidth		
	Smart IR, up to 30 m (98.4 ft.) IR distance		
	Built-in mic		
	Wide temperature range: -30 °C to 60 °C (-22 °F to 140 °F)		
	DC 12 V, PoE (IEEE 802.3af) power supply		

IPC-T122-APF28



I1141	High quality image with 1080P, 1/2.8" CMOS sensor		
	1080P (1920 × 1080)@25 fps; 720P (1280 × 720)@25 fps		
	Ultra 265, H.265, H.264		
	2D/3D DNR (digital noise reduction)		
	ROI (region of interest) ensures image quality in areas of	43,20	36,00
	Interest with low bandwidth		
	Smart IR, up to 30 m (98.4 ft.) IR distance		
	Built-in mic		
	Wide temperature range: -30 °C to 60 °C (-22 °F to 140 °F)		
	DC 12 V, PoE (IEEE 802.3af) power supply		

Uho-B1R-M2F3



I1127	High quality image with 2MP, 1/2.9" CMOS sensor		
	2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps		
	Ultra 265, H.265, H.264, MJPEG		
	Built-in Mic	51,60	43,00
	Smart IR, up to 30m (98ft) IR distance		
	Supports 128 G Micro SD card		
	IP67 protection		
	3-Axis		

IPC-B125-APF28

	High quality image with 5 MP, 1/3.0" CMOS sensor 5 MP (2592 × 1944)@20 fps; 4 MP (2560 × 1440)@20 fps; 3 MP (2304 × 1296)@20 fps; 1080P (1920 × 1080)@30 fps; 720P (1280 × 720)@30 fps; D1 (720 × 576)@30 fps Ultra 265, H.265, H.264 2D/3D DNR (digital noise reduction) ROI (region of interest) ensures image quality in areas of interest with low bandwidth Smart IR, up to 30 m (98.4 ft.) IR distance Built-in mic Wide temperature range: -30 °C to 60 °C (-22 °F to 140 °F) DC 12 V, PoE (IEEE 802.3af) power supply		
       		11142	60,0050,00

Uho-P1A-M3F4D

	High quality image with 3MP, 1/2.8" CMOS sensor 2304*1296@20fps in the main stream Ultra 265, H.265, H.264 Support digital WDR (Wide Dynamic Range) Built-in Mic & Speaker, support two-way audio, offer better interaction Support sound and light warning, makes warning and alarming more noticeable Smart IR, up to 30 m (98 ft) IR and 10m (33 ft) warm light distance, suitable for more scenes Self-contained bracket, support two kinds of mounting Supports 256 GB Micro SD card Wi-Fi connection and easy installation IP66 ingress protection The front face is made of grapheme, which has better heat dissipation and more Environmental protection		
       		11052	68,4057,00

Uho-P2S-M33F34

	Fixed camera and PTZ camera integration, dual channels with one IP, Look at overall situation and consider details at the same time Ultra 265, H.265, H.264 Support digital WDR (Wide Dynamic Range) Built in Mic Speaker, support two way audio, offer better interaction Support sound and light warning, makes warning and alarming more noticeable Smart IR, up to 30 m (98 ft) IR and 10m (33ft) warm light distance, suitable for more scenes IR warm light illumination to deal with different scenes and achieve full color illumination Supports 512 GB Micro SD card Wi Fi connection and easy installation IP66 ingress protection		
      		11128	118,8099,00

PTZ IP KAMERE

IPC6312LR-AX4-VG

	2MP LightHunter IR Network PTZ Camera High quality image with 2MP, 1/2.7" CMOS sensor Ultra 265, H.265, H.264, MJPEG Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection People Counting, support people flow counting and crowd density monitoring, suitable for different statistical scenarios LightHunter technology ensures ultra-high image quality in Low illumination environment Up to 120 dB Optical WDR (Wide Dynamic Range) Built-in Mic & Speaker Smart IR, Up to 50 m (164 ft) IR distance Micro SD, up to 256GB IP66 protection DC12V or PoE (IEEE 802.3af) power supply		
       		11073	255,00212,50

IPC675LFW-AX4DUPKC-VG



11109	5MP LightHunter Active Deterrence Mini PTZ Camera		
	High quality image with 5MP, 1/2.7" CMOS sensor		
	Ultra 265, H.265, H.264, MJPEG		
	LightHunter technology ensures ultra-high image quality in low illumination environment		
	Up to 120 dB Optical WDR (Wide Dynamic Range)	270,00	225,00
	Built-in Mic & Speaker		
	Smart IR, Up to 50 m (164 ft) IR distance and 10m (33 ft) warm light distance		
	Micro SD, up to 256GB		
	IP66 protection		
	DC12V or PoE (IEEE 802.3af) power supply		

IPC6412LR-X5UPW-VG



11157	2MP 5X LightHunter Wi-Fi IR Network Mini PTZ Camera		
	High quality image with 1080P, 1/2.7" CMOS sensor		
	1920 × 1080@30 fps in the main stream		
	Ultra 265, H.265, H.264, MJPEG		
	5X optical zoom allows for closer viewing of subjects		
	Smart intrusion prevention, supports false alarm filtering, including cross line, intrusion, enter area, leave area detection	228,00	190,00
	automatic selection of best snapshots		
	LightHunter technology ensures ultra-high image quality in low illumination environment		
	Up to 120 dB optical WDR (wide dynamic range)		
	Wi-Fi connection and easy installation		
	Built-in mic and speaker, supports two-way audio		
	Alarm I/O: 1/1		
	Smart IR, up to 30 m (98.4 ft) IR distance		

IPC6412LR-X16-VG



11074	2MP 16x LightHunter Network PTZ Dome Camera		
	High quality image with 2MP, 1/2.8" CMOS sensor		
	1920*1080@30fps in the main stream		
	Ultra 265, H.265, H.264, MJPEG		
	16X optical zoom allows for closer viewing of subjects		
	LightHunter technology ensures ultra-high image quality	396,00	330,00
	In low illumination environment		
	Smart IR, up to 100m (328ft) IR distance		
	Micro SD, up to 256GB		
	DC 12V±25% or PoE+ (IEEE 802.3at)		
	IP66 ingress protection		

IPC6424SR-X25--B



11152	4MP 25x LightHunter IR Network PTZ Camera		
	High quality image with 4 MP, 1/2.8" CMOS sensor		
	2688 × 1520@30 fps in the main stream		
	Ultra 265, H.265, H.264, MJPEG		
	25X optical zoom		
	Smart intrusion prevention, supports false alarm filtering, including cross line, intrusion, enter area, leave area detection		
	automatic selection of best snapshots, supports face detection masked area	636,00	530,00
	People counting, supports people flow counting and crowd density monitoring, suitable for different statistical scenarios		
	LightHunter technology ensures ultra-high image quality in low illumination environment		
	Smart IR, up to 100 m (328 ft) IR distance		
	DC 12 V±25%, PoE+ (IEEE 802.3at)		
	Alarm I/O: 2/1, audio I/O: 1/1		
	IP67 ingress protection		
	IK10 vandal resistant		

	4MP 33X LightHunter IR Network PTZ Camera High quality image with 4 MP, 1/2.8" CMOS sensor 2688 × 1520@30 fps in the main stream Ultra 265, H.265, H.264, MJPEG 33X optical zoom Smart intrusion prevention, supports false alarm filtering, including cross line, intrusion, enter area, leave area detection automatic selection of best snapshots, supports face detection masked area People counting, supports people flow counting and crowd density monitoring, Suitable for different statistical scenarios LightHunter technology ensures ultra-high image quality in low illumination environment AC 24 V±25%, DC 24 V±25%, PoE+ (IEEE802.3 at) Alarm I/O: 7/2, audio I/O: 1/1 IP67 ingress protection IK10 vandal resistant		
	I1153	1320,00	1100,00

VIDEO INTERFONI

OEU-201B-HMK-W

	Outdoor Station Front panel: Plastic cement Supports batch configuration Supports intercom calls to associated indoor units or APPs Support monitoring function, security alarm, tamper alarm Support Wi-Fi Built-in IC card reader Card Capacity 2000 IP65(Apply silica gel to gaps between the device and the wall)		
	I1201	216,00	180,00



OEU-202S-HMK2

	Outdoor Station Front panel: Metal Vandal-resistant: IK08 Supports batch configuration WDR: Digital Built-in IC card reader Card Capacity 10000 IP65(Apply silica gel to gaps between the device and the wall)		
	I1202	252,00	210,00



OEU-202S-HMK4

	Outdoor Station Front panel: Metal Vandal-resistant: IK08 Supports batch configuration WDR: Digital Built-in IC card reader Card Capacity 10000 IP65(Apply silica gel to gaps between the device and the wall)		
	I1204	276,00	230,00



OEU-301S-HMKA

	Outdoor Station Front panel: Metal Vandal-resistant: IK08 Supports batch configuration WDR: Digital Built-in IC card reader Card Capacity 10000 Alarm Output: 2 IP65(Apply silica gel to gaps between the device and the wall)		
	I1301	420,00	350,00





I1203	Wall Mount Sunshield Compatible with OEU-201B-HMK-W, OEU-201B-HMK-W-NB, OEU-201S-HMK-W, And OEU-201S-HMK-W-NB villa door stations	18,00	15,00
-------	---	-------	-------



I1372	Indoor Station Rugged ABS casing and glass panel. 1024*600 HD touch screen. Batch configuration transfer. Remote opening of linked door stations, one-key opening. Network camera monitoring, security alarm	192,00	160,00
-------	---	--------	--------



I1205	OEU-201S-HMK-W Metal casing. Supports call and intercom with the connected indoor station and app. Supports security protection alarm and tamper alarm triggered by door magnet, infrared, etc. Supports Wi-Fi. Built-in IC card reader. OEI-372S-H-W ABS casing and glass panel, solid and durable. Supports Wi-Fi. Supports touchscreen operation. 1024 x 600 HD screen. Supports remote door opening by sending signal to the door station. Allows to view live video of connected door stations and network cameras. NSW2020-6T-POE-IN Allows to switch operating modes, including Default, VLAN, and Extend. Supports VLAN isolation. All PoE ports are isolated from each other and only able to communicate with uplink ports. Supports network extension. With a high-quality network cable and IPC, the network transmission distance can reach up to 250 meters by lowering the network port rate to 10Mbps. Supports port priority. Packets from high-priority ports will be forwarded first. Supports flow control. When there is data congestion in the uplink ports, the switch will actively send flow control frames to PoE ports. Plug-and-play, simple and convenient. All metal casing, secure and reliable.	360,00	300,00
-------	--	--------	--------

HARD DISK0V1

WD GREEN 320 GB



Western Digital, 320GB GREEN, 7200RPM, SATA III, 32MB	KONTAKT
---	---------

WD GREEN 500 GB



Western Digital, 500GB GREEN, 7200RPM, SATA III, 32MB	KONTAKT
---	---------

WD GREEN 1 TB



Western Digital, 1 TB GREEN, 7200RPM, SATA III, 32MB	KONTAKT
--	---------

HDD 1TB WD11PURZ-85C5HY0



I1100	Western Digital, 1TB Purple, IntelliPower, SATA III, 64MB	178,80	149,00
-------	---	--------	--------

HDD 2TB WD23PURZ-85C5HY0



I1200	Western Digital, 2TB Purple, IntelliPower, SATA III, 64MB	208,80	174,00
-------	---	--------	--------

HDD 4TB WD44PURZ-85CPDY0



I1400	Western Digital, 4TB Purple, IntelliPower, SATA III, 64MB	298,80	249,00
-------	---	--------	--------

HDD 6TB WD64PURZ-74BWUY0



I1600	Western Digital, 6TB Purple, IntelliPower, SATA III, 64MB	434,40	362,00
-------	---	--------	--------

HDD 8TB WD64PURZ-85BWUY0



6250	Western Digital, 8TB Purple, IntelliPower, SATA III, 5400RPM, 256MB	594,00	495,00
------	---	--------	--------

TF-64G-T-L



I1021	Uniview memorijska kartica Kapacitet: 64GB Maksimalna brzina čitanja: 90MB/s Maksimalna brzina pisanja: 65MB/s Dimenzije: 11mm x 15mm x 1mm Težina: 0,33g	27,60	23,00
-------	--	-------	-------

TF-128G-T-L



I1022	Uniview memorijska kartica Kapacitet: 128GB Maksimalna brzina čitanja: 100MB/s Maksimalna brzina pisanja: 80MB/s Dimenzije: 11mm x 15mm x 1mm Težina: 0,33g	45,60	38,00
-------	--	-------	-------

TF-256G-T-L



I1123	Uniview memorijska kartica Kapacitet: 256GB Maksimalna brzina čitanja: 90MB/s Maksimalna brzina pisanja: 65MB/s Dimenzije: 11mm x 15mm x 1mm Težina: 0,33g	108,00	90,00
-------	---	--------	-------

Uniview SVIČEVI					
NSW1010-5T-IN					
	I1130	5-Port 100 Megabit Plastic Shell Switch Supports IEEE802.3 and IEEE802.3u standards. Supports 10/100Mbps or 10/100/1000Mbps self-adaptive Ethernet port. Supports auto MDI/MDIX. Supports IEEE802.3 flow control for full-duplex mode and backpressure For half-duplex mode.	8,40	7,00	
NSW1010-8T-IN					
	I1131	8-Port 100 Megabit Plastic Shell Switch Supports IEEE802.3 and IEEE802.3u standards. Supports 10/100Mbps or 10/100/1000Mbps self-adaptive Ethernet port. Supports auto MDI/MDIX. Supports IEEE802.3 flow control for full-duplex mode and backpressure For half-duplex mode.	12,00	10,00	
NSW1010-5GT-IN					
	I1132	5-Port Gigabit Plastic Shell Switch Supports IEEE802.3 and IEEE802.3u standards. Supports 10/100Mbps or 10/100/1000Mbps self-adaptive Ethernet port. Supports auto MDI/MDIX. Supports IEEE802.3 flow control for full-duplex mode and backpressure For half-duplex mode	14,40	12,00	
NSW1010-8GT-IN					
	I1133	8-Port Gigabit Plastic Shell Switch Supports IEEE802.3 and IEEE802.3u standards. Supports 10/100Mbps or 10/100/1000Mbps self-adaptive Ethernet port. Supports auto MDI/MDIX. Supports IEEE802.3 flow control for full-duplex mode and backpressure For half-duplex mode.	24,00	20,00	
NSW3000-25GT16P16C-IN					
	I1189	NOVO Gigabit Cloud Management Switch Ports Type: 24 x 10/100/1000Mbps port (RJ45) 1 x 10/100/1000Mbps port (RJ45) 1 x Gigabit SFP 1 x Gigabit Combo Supports unified configuration, management, and search on the software, convenient for rapid operation and maintenance of multiple devices; supports automatically discovering the connected video devices and generating a network topology on the software. Supports Web login, and device configuration and management on the Web interface; Supports visiting the cloud by scanning the QR code. Allows to view the device status and network topology in real time on the app. Supports the extend mode for up to 250m communication range and 10Mbps auto-negotiation rate. Allows to report port abnormal alarms to the software for realtime monitoring. Supports port priority. The packets received by the priority port will be forwarded first when the switch is fully loaded. All metal casing, secure and reliable.	192,00	160,00	
Uniview POE SVIČEVI					
NSW2020-6T-POE-IN					
	I1023	6×100Mbps network ports (RJ45), od toga 4 PoE porta Podržava: IEEE802.3,IEEE802.3u, IEEE802.3az,IEEE802.3x,IEEE802.3af,IEEE802.3at Modovi rada: Default(Normal mode): Svi portovi komuniciraju normalno međusobno EXTEND(Surveillance mode): Distanca prenosa do 250 metara uz brzinu 10Mb/s. 6kV zaštita od prenapona PoE Budžet: 60W Maksimalna snaga porta: 30W Dimenzije: 108mm x 100mm x 25.5mm	54,00	45,00	

NSW2100-6GT-POE-IN



	4 Port Gigabits PoE Switch Ports Type: 4x 10/100/1000Mbps PoE port (RJ45) 2 x 10/100/1000Mbps port (RJ45) Supports Web login, and device configuration and management on the Web interface. Supports visiting the cloud by scanning the QR code. Allows to view the device status in real time on the app, and remotely restart the PoE power supply. Supports PoE power supply ; allows to enable or disable PoE power supply for the powered device; allows up to 250m power supply using a standard network cable. Supports the extend mode for up to 250m communication range and 10Mbps auto-negotiation rate. Supports port priority. The priority port will be powered first when the PoE power supply is full. All metal casing, secure and reliable. Max capacity:65W Maximum PoE power for single port: 30W		
I1188		60,00	50,00

NSW2010-5GT-POE-IN



	4 Port GigabitPoE Switch 1 Port Gigabit Uplink PoE Power up to 30W Each Port Supports IEEE802.3 at Standard, compatible with IEEE802.3af by electrical equipment (PD) Auto Detect Power Device Power Port Supply prioritization, guarantees the continuous power supply of key nodes IEEE802.3 X full duplex flow control and Backpressure half duplex flow control Line Speed Forwarding, intelligent identification Up to 250m transmission distance on surveillance mode		
I1059		78,00	65,00

NSW2020-10T-POE-IN



	10x100Mbps network ports (RJ45), od toga 8 PoE porta Podržava: IEEE802.3,IEEE802.3u, IEEE802.3az,IEEE802.3x,IEEE802.3af,IEEE802.3at Modovi rada: Default(Normal mode); Svi portovi komuniciraju normalno međusobno EXTEND(Surveillance mode); Distanca prenosa do 250 metara uz brzinu 10Mb/s. VLAN(Secure mode); 8 Downlink portova mogu komunicirati samo sa uplink portovima. 6kV zaštita od prenapona PoE Budžet: 88W Maksimalna snaga porta: 30W Dimenzije: 171mm x 101mm x 25.5mm		
I1024		90,00	75,00

NSW2010-10GT-POE-IN



	8 Port Gigabit PoE Switch 2 Port Gigabit Uplink PoE Power up to 30W Each Port Supports IEEE802.3 at Standard, compatible with IEEE802.3af by electrical equipment (PD) Auto Detect Power Device Power Port Supply prioritization, guarantees the continuous power supply of key nodes IEEE802.3 X full duplex flow control and Backpressure half duplex flow control Line Speed Forwarding, intelligent identification Up to 250m transmission distance on surveillance mode		
I1060			

NEMA NA STANJU

NSW2100-9GT16P-LPOE-IN



	8 Port Gigabits PoE Switch Ports Type: 8x 10/100/1000Mbps PoE port (RJ45) 1 x 10/100/1000Mbps port (RJ45) 1 x Gigabit SFP Supports Web login, and device configuration and management on the Web interface. Supports visiting the cloud by scanning the QR code. Allows to view the device status in real time on the app, and remotely restart the PoE power supply. Supports PoE power supply ; allows to enable or disable PoE power supply for the powered device; allows up to 250m power supply using a standard network cable. Supports the extend mode for up to 250m communication range and 10Mbps auto-negotiation rate. Supports port priority. The priority port will be powered first when the PoE power supply is full. All metal casing, secure and reliable.		
I1179		96,00	80,00

NSW3000-8T2GT-POE-IN

I1134

Cloud Managed Ethernet Switch(PoE)
8 x 10/100Mbps POE port (RJ45) ,2 x Gigabit port (RJ45)
Supports unified configuration, management, and search on the software, convenient for rapid operation and maintenance of multiple devices; supports automatically discovering the connected video devices and generating a network topology on the software.
Supports Web login, and device configuration and management on the Web interface; supports visiting the cloud by scanning the QR code.
Allows to view the device status and network topology in real time on the app, and remotely restart the PoE power supply.
Allows up to 250m power supply using a standard network cable.
Supports the extend mode for up to 250m communication range and 10Mbps auto-negotiation rate.
Allows to report port abnormal alarms to the software for realtime monitoring.
Supports port priority. The packets received by the priority port will be forwarded first when the switch is fully loaded and the priority port will be powered first when the PoE power supply is full.
All metal casing, secure and reliable.
Maximum total power: 120W
Maximum PoE power for single port: 30W

96,00 80,00

NSW2020-16T2GC-POE-IN

I1067

16x100Mbps network ports (RJ45), 2x1000Mbps uplink porta (RJ45), 2x1000Mbps SFP porta, od toga 16x PoE porta
Podrška: IEEE802.3,IEEE802.3u,IEEE802.3az, IEEE802.3x,IEEE802.3af,IEEE802.3at
Modovi rada: Default(Normal mode):
Svi portovi komuniciraju normalno međusobno
EXTEND(Surveillance mode): Distanca prenosa do 250 metara uz brzinu 10Mb/s.
VLAN(Secure mode): 16 x Downlink portova mogu komunicirati samo sa uplink portovima.
6kV zaštita od prenapona PoE Budžet: 370W
Maksimalna snaga: 250W
Maksimalna PoE snaga porta: 30W
Dimenzije: 440mm x 207mm x 45mm
Moguća rek montaža 19" , dolazi uz switch

216,00 180,00

NSW3000-16T1GT1GC-LPOE-IN

I1135

Cloud Management Switch
16 x 10/100Mbps POE port (RJ45) + 1 x Gigabit port (RJ45)+ 1 x Gigabit Combo
Supports unified configuration, management, and search on the software, convenient for rapid operation and maintenance of multiple devices; supports automatically discovering the connected video devices and generating a network topology on the software.
Supports Web login, and device configuration and management on the Web interface
in real time on the app, and remotely restart the PoE power supply.
Supports PoE power supply and allows to view the power; allows to enable or disable PoE power supply for the powered device;
Allows up to 250m power supply using a standard network cable.
Supports the extend mode for up to 250m communication range and 10Mbps auto-negotiation rate.
Allows to report port abnormal alarms to the software for realtime monitoring.
Supports port priority. The packets received by the priority port will be forwarded first when the switch is fully loaded and the priority port will be powered first when the PoE power supply is full.
All metal casing, secure and reliable.
Maximum total power: 150W
Maximum PoE power for single port: 30W

192,00 160,00

NSW2020-24T1GT1GC-POE-IN

I1163

Unmanaged Ethernet Switch(PoE)
24x100Mbps PoE ports (RJ45) + 1x1000Mbps Gigaethernet ports +1x1000Mbps Combo ports
Multiple working modes to address your business needs: Default(Normal mode), VLAN(Secure mode), EXTEND(Surveillance mode)
Support port traffic control
Support for secure mode, all downlink ports can communicate only with uplink ports
Up to 250m transmission distance on surveillance mode
Support buffer optimization
All metal housing, safe and reliable
Max capacity:370W
Max capacity for single port: 30W

232,20 193,50

NSW2010-24T2GC-PoE-IN

	I1136	Ethernet Switch(PoE) 24×100Mbps PoE ports (RJ45)+2×1000Mbps Combo ports Multiple working modes to address your business needs: Default(Normal mode), VLAN(Secure mode), EXTEND(Surveillance mode) Support port traffic control Support for secure mode, all downlink ports can communicate Only with uplink ports Up to 250m transmission distance on surveillance mode Support buffer optimization All metal housing, safe and reliable Max power: 390W	288,00	240,00

NSW3000-25GT1GP1GC-LPOE-IN

	I1191	Gigabit Cloud Management PoE Switch Ports Type: 24 x 10/100/1000Mbps PoE port (RJ45) 1 x 10/100/1000Mbps port (RJ45) 1 x Gigabit SFP 1 x Gigabit Combo Supports unified configuration, management, and search on the software, convenient for rapid operation and maintenance of multiple devices; supports automatically discovering the connected video devices and generating a network topology on the software. Supports Web login, and device configuration and management on the Web interface; Supports visiting the cloud by scanning the QR code. Allows to view the device status and network topology in real time on the app, and remotely restart the PoE power supply. Supports PoE power supply and allows to view the power; allows to enable or disable PoE power supply for the powered device; allows up to 250m power supply using a standard network cable. Supports the extend mode for up to 250m communication range and 10Mbps auto-negotiation rate. Allows to report port abnormal alarms to the software for realtime monitoring. Supports port priority. The packets received by the priority port will be forwarded first when the switch is fully loaded and the priority port will be powered first when the PoE power supply is full. All metal casing, secure and reliable.	300,00	250,00

MONITORI





	I1164	UNV 24" LED Monitor Resolution 1920 × 1080 Color Support: 16.7 M Refresh Rate: 60 Hz Operation Hour: 24/7	120,00	100,00

DODATNA OPREMA

	I1101	UNV-Link Pro Connect Box Network: 4 x RJ45 10M/100M Base-TX EthernetNetwork Port 1 Support POE (IEEE802.3af) OutputNetwork Port 4 Support PSE Voltage Test Wi-Fi 2.4G Wi-Fi Battery: 7500mAH Power Input: 1 x DC 5V/2A max, type-c Power Output: 1 x DC 12V/1A output; 1 x DC 5V/1A output, type-A	78,00	65,00

PoE Extender

	2317	Model: ZX-14AF-S (HORACO) PoE Input Port (Uplink): 1x 10/100Mbps RJ45 PoE Output Ports: 4x 10/100Mbps RJ45 PoE Protocol: IEEE 802.3af / IEEE 802.3at Power Capacity: Supports up to 60W Total Input / Max 30W Output per port Transmission Distance: 100 meters (Standard) / Up to 250 meters (Extend Mode)	30,00	25,00

KABLOVI				
UNV Cat6 (UTP), CCA				
	i1044	CAB-LC3100B-CCA-IN Conductor material: CCA(Copper content: 27%) Insulation material: HDPE Packing length: 305±1 m Sheath material: PVC	0,30	0,250
UNV Cat5e (UTP), BC				
	i1045	CAB-LC2100A-E2-ECA-IN Conductor material: OFC (Oxygen free copper) Insulation material:HDPE Packing length: 305±1 m Sheath material: PVC (complies RoHS/REACH)	0,54	0,45
UNV Cat6 (UTP), BC				
	i1046	CAB-LC3100A-EC-ECA-IN Conductor material: OFC (Oxygen free copper) Insulation material: HDPE Packing length: 305±1 m Sheath material: PVC (complies RoHS/REACH)	0,78	0,65
CAB-LC3110B-E-IN				
	11186	Cat6 305m Outdoor UTP Network Cable (OFC 0.5mm Black) Packing length: 305±1m Material: Solid-Bare Copper Insulation material: HDPE Sheath material(IN Jacket): PVC(complies RoHS/REACH) Sheath material (OUT Jacket): LDPE Color: Black	0,84	0,70
KUČIŠTA I NOSAČI				
DOZNA ZA KAMERE BA-01				
	5633	Razvodna kutija za spoljašnu montažu kamere, 131x131x51 mm; Pogodna za direktnu montažu kamere na kutiju i smeštanje konektora za povezivanje.	3,60	3,00
DOZNA ZA KAMERE G153				
	8644	Razvodna kutija za spoljašnu montažu kamere, 115x115x55 mm; Pogodna za direktnu montažu kamere na kutiju i smeštanje konektora za povezivanje.	3,20	2,67
DOZNA ZA KAMERE BA-02				
	8645	Razvodna kutija za unutrašnju montažu kamere, 120/50mm; Pogodna za direktnu montažu kamere na kutiju i smeštanje konektora za povezivanje.	3,00	2,50

TR-JB05-B-IN



I1062	Nosač za Dome kamere serije IPC21XX Dimenzije: Φ104.4mm*54.5mm Težina: 0.36kg Materijal: Aluminijum	19,20	16,00
-------	--	-------	-------

TR-JB05-A-IN



I1061	Nosač za kamere Dimenzije: Φ93 × 93 × 39mm Težina: 0.2kg Materijal: Aluminijum	15,60	13,00
-------	---	-------	-------

TR-JB03-G-IN



I1064	Nosač za Dome kamere serije IPC32x i IPC31x Dimenzije: φ106.6mm*36mm Težina: 0.2kg Materijal: Aluminijum	13,20	11,00
-------	---	-------	-------

TR-JB03-I-IN



I1063	Nosač za Dome kamere serije IPC36XXL i IPCT1XX Dimenzije: Ø117.8 × 36mm Težina: 0.2kg Materijal: Aluminijum	15,60	13,00
-------	--	-------	-------

TR-JB03-H-IN



I1171	Nosač za Dome kamere serije IPC363X, IPC36XXS/E i 4MP fisheye Dimenzije: Φ126mm*36mm (4.96" x1.42") Težina: 0.24kg Materijal: Aluminijum legura	14,40	12,00
-------	--	-------	-------

TR-JB04-C-IN



I1172	Nosač za Dome kamere serije 323 Dimenzije: Φ144.8 mm × 42.5 mm (5.7" × 1.7") Težina: 0.3kg Materijal: Aluminijum legura	15,60	13,00
-------	--	-------	-------

TR-JB07-D-IN



I1170	Bullet Junction Box(Support wiring from behind)	30,00	25,00
-------	---	-------	-------

TR-JB07/WM03-G-IN



I1165	Wall Mounting Assembling Bracket For 32 Fix-dome &Mini Fix-dome&Plastic Turret Camera	36,00	30,00
-------	---	-------	-------

TR-WM07P-B



Dome Wall Mounting Plastic Bracket
Application: IPC32X Series, IPC361XX Series (Plastic)
Bracket Weight: 0,10kg

7,20 6,00

UNV TR-UP06-C-IN-V2



Pole Mounting Bracket for Bullet Junction Box Only
Application: Outdoor, pole or rail installation for
Bullet camera of IPC23XX OEM IPC23XX/22X、IPC74X and IPC252/26X series
Bracket Dimensions: 136.0 mm × 127.0 mm × 63.6 mm (5.4" × 5.0" × 2.5")
Bracket Weight: 0.34kg
Bracket Material: Aluminum alloy

14,40 12,00

KONEKTORI

BNC NA LEMLJENJE
SA ŠRAFOM



3299 BNC konektor muški sa šrafom.
Pakovanje 100 kom.

0,54 0,45

BNC NA LEMLJENJE



2560 BNC konektor muški na lemljenje.
Pakovanje 100 kom.

0,54 0,45

BNC KONEKTOR



30020 BNC konektor muški na šraf.

0,50 0,42

BNC NA KRIMP RG59



2534 BNC konektor za RG59 kabl na krimp.
Pakovanje 100 kom.

0,60 0,50

BNC MUŠKI- F ŽENSKI



1795 BNC konektor muški F ženski.
Pakovanje 100 kom.

0,70 0,58

BNC NASTAVAK



4447 BNC konektor. Nastavak ženski-ženski.
Pakovanje 100 kom.

0,54 0,45

F KONEKTOR na krimp
RG6



2559 F konektor za RG6 kabl.
Pakovanje 100 kom.

0,14 0,12

F KONEKTOR na krimp RG59



1796 F konektor za RG59 kabl.
Pakovanje 100 kom.

0,14 0,12

RF METALNI G MUŠKI



4448 RF metalni G muški (UGAONI) konektor
Pakovanje 100 kom.

0,35 0,29

RCA MUŠKI-F ŽENSKI					
	4446	RCA muški - F ženski konektor Pakovanje 100 kom.		0,53	0,44
F NASTAVAK					
	3300	F nastavak ženski - ženski Pakovanje 100 kom		0,22	0,18
F KONEKTOR KOMPRESIONI RG6 XL					
	1625	Profesionalni PPC F konektor za RG6 kabl. Pakovanje 50 kom.		0,44	0,37
F KONEKTOR KOMPRESIONI RG11 XL					
	1627	Profesionalni PPC F konektor za RG11 kabl.		2,96	2,47
F KONEKTOR KOMPRESIONI RG59 XL					
	1624	Profesionalni PPC F konektor za RG59 kabl. Pakovanje 50 kom.		0,47	0,39
DC KABL-MUŠKI					
	1387	DC utikač-muški		0,47	0,39
DC KABL-ŽENSKI					
	1391	DC utikač-ženski		0,47	0,39
DC KONEKTOR MUŠKI					
	3425	DC konektor Muški		0,37	0,31
DC KONEKTOR ŽENSKI					
	4197	DC konektor ženski.		0,38	0,32
DC RAZDELNIK 1-4					
	1388	1 DC utičnica - 4 DC utikača		1,99	1,66
DC RAZDELNIK 1-8					
	1389	1 DC utičnica - 8 DC utikača		3,97	3,31
CAT7 RJ45					
		Mrežni konektor RJ45 kategorija 7		0,50	0,42

CAT6 UNV RJ45 GC-RJ6-IN					
	i1182	Cat6 Unshielded Crystal Head 3μ inches gold-plated for excellent contact performance Stable data transmission with up to 750 plugs and unplugs Highly transparent PC material support RoHS standards, Wear-resistant and durable 8 pins × 8 conductors, support 1000Bas-T Ethernet	0,12	0,10	
CAT5 UNV GC-RJ5e-IN					
	i1183	Cat5e Unshielded Crystal Head 3μ inches gold-plated for excellent contact performance Stable data transmission with up to 750 plugs and unplugs Highly transparent PC material support RoHS standards, wear-resistant and durable 8 pins × 8 conductors, support 1000Base-T Ethernet	0,10	0,08	
CAT5 RJ45					
	0067	Mrežni konektor RJ45	0,05	0,04	
Telefonski konektor RJ11					
	0066	Telefonski konektor RJ11	0,02	0,02	
DODATNA OPREMA					
ŠTAMPAČ P-TOUCH E100					
	4663	Širina TZ trake: 6, 9 i 12mm ABC Tastatura LCD displej sa 16 karaktera u jednoj liniji Ispis u najviše 2 linije Najveća visina slova za štampanje: 9mm Brzina štampe: 20mm/s Rezolucija štampe: 180 dpi Serijsko numerisanje 1-9 Podešavanje dužine etikete 30-300mm 9 različitih vrsta fontova, veličine 15 Horizontalni ili vertikalni ispis Manuali sekač Napajanje: 6 AAA baterija *dolazi u kompletu sa praktičnim koferom, trakom za ruku, jednom TZe trakom kao uzorkom i uputstvom za upotrebu	106,56	88,80	
MIKROFON LY-501C					
	2584	Audio modul sa izvedenim konektorima. Napajanje 12 V DC	3,97	3,31	
MIKROFON LY-502B					
	2583	Audio modul plastični sa trimerom. Napajanje 12 V DC	6,00	5,00	
MIKROFON LY-506					
	1937	Audio modul metalni sa trimerom. Napajanje 12 V DC	10,00	8,33	
DS-2FP2020					
	5222	Viisoko osetljivi omnidirekcionni mikrofoni. Osetljivost -34 dB. Prenos zvuka do 3.000 metara. SNR: 60dB. Nivo signala 2Vpp, 12Vdc. Dimenzije 78 x 28mm. Napajanje 12 VDC (9 V to 15 V).	36,00	30,00	
DH-PFM800-4K (par)					
	3632	One (1) Channel Balun Real-time Transmission over UTP CAT5E/6 Cable Compatible with HDCVI, TVI, AHD, and CVBS Video Formats Transmission Distance at 4K: 200 m (656 ft) External Power Supply not Required	7,80	6,50	

OG razvodna kutija 100x100				
	00091	Razvodna kutija 100x100	1,80	1,50
OG razvodna kutija 80x80				
	00092	Razvodna kutija 80x80	1,10	0,92
OG razvodna kutija 160x100x74				
	00093	Razvodna kutija 160x100x74	3,00	2,50
OG razvodna kutija 160x100x48				
	00094	Razvodna kutija 160x100x48	2,64	2,20
ALAT ZA KRIMP RG6, RG11,RG59				
	3302	Alat za krimpovanje RG6, RG11,RG59 konektora	48,00	40,00
STRIPER ZA KABLOVE RG59,RG6				
	3301	Alat za stripovanje RG59,RG6 kablova	20,40	17,00
ALAT KOMPRESIONI ZA RG59, RG6				
	1629	Profesionalni PPC alat za kompresovanje kompresionih F konektora RG59,RG6 XL oznake.	37,92	31,60
ALAT KOMPRESIONI, ZA RG6,RG11,RG59				
	3796	Profesionalni PPC alat za kompresovanje kompresionih F konektora RG6,RG11,RG59 XL oznake.	54,34	45,28
KLEŠTA ZA KRIMPOVANJE KOMPLET				
	5790	Komplet sadrži: - LAN Tester RJ11, 12 i 45 - LSA Punch Down Tool sa sečicom za kabl - Alat za krimpovanje RJ11, 12 i 45 - Alat za sečenje i skidanje izolacije - Torbica Ne sadrži bateriju za Network Tester (9V block cell)	28,68	23,90
NAPAJANJA				
XED-1212S				
	1633	Ulaz: 90V-264V Izlaz: 12V , 1A Snaga: 12W Dimenzije: 74 (D) x 46 (Š) x 30 (V) mm Dužina izlaznog kablo: 110cm, 10.5x5,5x2mm konektor	6,00	5,00
XED-2012S				
	1382	Ulaz: 90V-264V Izlaz: 12V , 2A Snaga: 24W Dimenzije: 98 (D) x 52 (Š) x 35 (V) mm Dužina izlaznog kablo: 110cm, 10.5x5,5x2mm konektor	8,04	6,70

XED-3013S			1383	Ulaz: 90V-264V Izlaz: 12V , 3A Snaga: 36W Dimenzije: 98 (D) x 52 (Š) x 35 (V) mm Dužina izlaznog kabla: 110cm, 10.5x5,5x2mm konektor	12,60	10,50
XED-5013S			1384	Ulaz: 100V-240V Izlaz: 12V , 5A Snaga: 60W Dimenzije: 126 (D) x 57 (Š) x 32 (V) mm Dužina izlaznog kabla: 110cm, 10.5x5,5x2mm konektor	16,20	13,50
XED-6013B			3509	Ulaz: 100V-240V Izlaz: 12V , 6A Snaga: 72W Dimenzije: 126 (D) x 57 (Š) x 32 (V) mm Dužina izlaznog kabla: 110cm, 10.5x5,5x2mm konektor	20,40	17,00
9-KANALNO NAPAJANJE XED-10A12VX-9L			5435	Snaga: 120W Ulaz: 100~240V 50~60Hz Izlaz: 12V 10A 9 kanala Dimenzije: 237*213*70mm Neto težina: 1800g Napomena: Sadrži AC kabl	82,80	69,00
18-KANALNO NAPAJANJE XED-15A12VX-18L			5114	Snaga: 180W Ulaz: 100~240V 50~60Hz Izlaz: 12V 15A 18 kanala Dimenzije: 240*218*70mm Neto težina: 2300g Napomena: Sadrži AC kabl	94,80	79,00

Sve cene su iskazane u EUR sa obračunatim PDV-om, podložne su promenama i zavisne od odnosa DIN/EUR/USD. Plaćanje se vrši u dinarima po važećem prodajnom kursu poslovne banke. ISEC zadržava pravo izmene cena bez prethodne najave. Dostupna i oprema koje nema u cenovniku! Za detaljnije informacije, molimo kontaktirajte nas na gore navedene brojeve telefona ili posetite www.isec.rs