ISEC

Arhiepiskopa Danila II 18 , 18000 Niš
Tel: 018 574 048
Mob: 060 339 79 09 | 060 339 79 59
www.isec.rs | office@isec.rs
Licenca MUP-a za privatno obezbedjenje : 18737

# CENOVNIK UNIVIEW VIDEO NADZORA – 10.11.2026.




| NAZIV | ŠIFRA | OPIS | CENA | |
|---|---|---|---|---|
| DVR UREDJAJI | | | sa PDV | bez PDV |
| 4 KANALNI | | | | |
| XVR301-04G3 | | | | |
|   | I1031 | **4-CH Hybrid DVR**<br>Podrzan video ulaz: 5MP @ 20fps ( Prvi kanal 20fps, ostali 12fps ) 5MP @ 12fps, 4MP @ 30fps ( Prvi kanal ) 4MP @ 15fps,1080P @ 30fps, 720P @ 60fps<br>Podrzan video ulaz IP kamere: do 4MP (2 IP kamere ili svih 6)<br>Rezolucija snimanja encoding: 5MP Lite/4MP Lite /1080P/720P/960H/D1/CIF<br>Video kompresija: H.265, H.264<br>Video/audio ulazi: 4ch BNC, 1ch audio, RCA<br>Video/audio izlazi: HDMI/VGA (FULL HD), 1ch audio<br>Ulazno/Izlazni saobraćaj: 16/48 Mbps<br>Smart funkcije: Detekcija pokreta, video loss detection<br>Dodatni ulazi: RJ45 mrežni ulaz, 2xUSB 2.0 interfejs<br>Mrežni protokoli: TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE<br>Hard disk prostor: 1 sata HDD do 8TB kapaciteta<br>Opšte: Napajanje 12V DC, Potrošnja 8W bez HDD, Podržava audio over coaxial cable<br>Radna temperatura: -10 °C ~ +55 °C,<br>Dimenzije: 260mm ×226mm× 47mm (10.2" × 8,9"×1.8"), 1.1kg | 69,60 | 58,00 |
| XVR301-04Q3 | | | | |
|  | I1032 | **4-CH Hybrid DVR**<br>Rezolucija snimanja: 8MP Lite/5MP/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF<br>Podržava TVI,AHD, CVI,CVBS<br>Rezolucija snimanja IP kamera: do 8mp (2 IP kamere ili svih 6)<br>Video kompresija: H.265, H.264<br>Video/audio ulazi: 4ch BNC, 1ch audio<br>Video/audio izlazi: HDMI/VGA (FULL HD), CVBS (960x576), 1ch audio<br>Ulazno/Izlazni saobraćaj: 48/60 Mbps<br>Smart funkcije: Motion detection, video loss detection, audio detection,<br>Dodatni ulazi: RJ45 mrežni ulaz, 2xUSB 2.0 interfejs, 1xRS485<br>Mrežni protokoli: TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP<br>Hard disk: 1 sata HDD do 8TB kapaciteta<br>Napajanje 12V DC, Potrošnja 10W bez HDD,<br>Radna temperatura: -10 °C ~ +55 °C,<br>Dimenzije: 260mm ×226mm× 47mm | 86,40 | 72,00 |

## XVR301-04U3



I1129

**4-ch 1U Digital Video Recorder**
Recording Resolution: 8MP/5MP/4MP/1080P/720P/D1
Support Ultra 265/H.265/H.264 video formats
Support audio over coaxial cable (TVI cameras)
Control the dual-light of UNV analog cameras under TVI
Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
Support 1-ch CVBS output, 1-ch VGA output,
1-ch HDMI output at up to 4K (3840 x 2160)
HDMI and VGA simultaneous output
Long transmission distance over coaxial cable
Support mainstream cameras of ONVIF and RTSP protocols
1HDD Up to 16 TB

132,00 110,00

## 8 KANALNI

## XVR301-08G



I1176

**8-Ch Digital Video Recorder**
Support H.265/H.264 video formats
Recording Resolution: 5MP Lite/4MP Lite /1080P/720P/960H/D1/CIF
Support audio over coaxial cable (only for TVI cameras)
Control the dual-light of UNV analog cameras under TVI
Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
4/8/16-channel BNC input
Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080
HDMI and VGA simultaneous output
Long transmission distance over coaxial cable
Support mainstream cameras of ONVIF and RTSP protocols
1 SATA interface up to 6 TB

84,00 70,00

## XVR301-08G3



I1025

**8-CH Hybrid DVR**
Podržava: TVI,AHD, CVI, CVBS
Rezolucija snimanja: 5MP Lite/4MP Lite /1080P/1080P Lite/720P/CIF
Rezolucija snimanja IP kamera: do 4mp (4 IP kamere ili svih 8)
Video/audio ulazi: 8-ch (BNC) / 1-ch (RCA)
Video/audio izlazi: HDMI/VGA (FULL HD), CVBS, 1ch audio
Ulazno/Izlazni saobraćaj: 32/64 Mbps
Dodatni ulazi: RJ45 mrežni ulaz, 2xUSB 2.0 interfejs
Mrežni protokoli: TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP
Hard disk: 1 sata HDD do 8TB
Napajanje 12V DC, Potrošnja 8W bez HDD
Radna temperatura: -10 °C ~ +55 °C
Dimenzije: 260mm ×226mm× 47mm

91,20 76,00

## XVR301-08Q3



I1033

**8-CH Hybrid DVR**
Rezolucija snimanja: 8MP Lite/5MP/ 5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF
Podržava TVI,AHD, CVI,CVBS
Rezolucija snimanja IP kamera: do 8mp (4 IP kamere ili svih 12)
Video kompresija: H.265, H.264
Video/audio ulazi: 8ch BNC, 1ch audio
Video/audio izlazi: HDMI/VGA (FULL HD), CVBS (960x576), 1ch audio
Ulazno/Izlazni saobraćaj: 40/64 Mbps
Smart funkcije: Motion detection, video loss detection, audio detection,
Dodatni ulazi: RJ45 mrežni ulaz, 2xUSB 2.0 interfejs, 1xRS485, Alarmni ulaz/izlaz 4/1
Mrežni protokoli: TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP
Hard disk: 1 sata HDD do 8TB kapaciteta
Napajanje 12V DC,
Potrošnja 10W bez HDD,
Radna temperatura: -10 °C ~ +55 °C,
Dimenzije: 260mm ×226mm× 47mm

129,60 108,00

## XVR301-08U3



| | | | |
|---|---|---|---|
| I1080 | **8-Ch 1U Digital Video Recorder**<br>Recording Resolution: 8MP/5MP/4MP/1080P/720P/D1<br>Support Ultra 265/H.265/H.264 video formats<br>Support audio over coaxial cable (TVI cameras)<br>Control the dual-light of UNV analog cameras under TVI<br>Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access<br>8-channel BNC input<br>Support 1-ch CVBS output, 1-ch VGA output, 1-ch HDMI output at up to 4K (3840 x 2160)<br>HDMI and VGA simultaneous output<br>Long transmission distance over coaxial cable<br>Support mainstream cameras of ONVIF and RTSP protocols | 210,00 | 175,00 |

## 16 KANALNI

## XVR301-16G3



| | | | |
|---|---|---|---|
| I1026 | **16-CH Hybrid DVR**<br>Podržava: TVI, AHD, CVI, CVBS, IP cameras<br>Rezolucija snimanja: 5MP Lite/4MP Lite /1080P/1080P Lite/720P/D1/CIF<br>IP kamere: do 8 IP kamere ili svih 16<br>Video/audio ulazi: 16-ch BNC / 1-ch RCA<br>Video/audio izlazi: VGA, HDMI, CVBS, 1ch audio<br>Ulazno/Izlazni saobraćaj: 40/64 Mbps<br>Dodatni ulazi: RJ45 mrežni ulaz, 2x USB, 1x RS485<br>Mrežni protokoli: TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP<br>Hard disk: 1 SATA HDD do 8TB<br>Napajanje 12V DC, Potrošnja 10W bez HDD<br>Radna temperatura: -10 °C ~ +55 °C<br>Dimenzije: 260mm ×226mm× 47mm | 150,00 | 125,00 |

## XVR302-16Q3



| | | | |
|---|---|---|---|
| I1034 | **16-CH Hybrid DVR**<br>Rezolucija snimanja: 8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF<br>Podržava 8MP@15fps na prva 4 kanala<br>Rezolucija snimanja IP kamera: 8IP kamera (isključivanjem analognih kanala 24IP), svaki kanal do 8mpx.<br>Ulazno/Izlazni saobraćaj: 72/80 Mbps<br>Video kompresija: H.265/H.264 video kompresija,<br>Video/audio ulazi: 16ch BNC, 1ch RCA<br>Video/audio izlazi: HDMI/VGA (FULL HD), 1ch RCA<br>Smart funkcije: Motion detection, tampering, video loss detection, face detection, instrusion detection, cross line detection, audio detection, defocus detection, scene change detection<br>Dodatni ulazi: RJ45 mrežni ulaz, 1xUSB 3.0 interfejs (pozadi) 1xUSB 2.0 (napred), 1x RS485<br>Mrežni protokoli: TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE<br>Hard disk prostor: 2 sata HDD do 6TB kapaciteta<br>Opšte: Napajanje 12V DC, Potrošnja 12W bez HDD,<br>Radna temperatura: -10 °C ~ +55 °C,<br>Dimenzije: 380mm ×315mm× 53mm, Težina 1.9Kg | 273,60 | 228,00 |

## KIT/XVR 301-04G3/4*UAC-T112-F28



| | | | |
|---|---|---|---|
| I1065 | **UNV KIT/XVR 301-04G3/4*UAC-T112-F28**<br>Kompet sadrži:<br>1x XVR 04G3<br>4x UAC-T112-F28<br>1x Napajanje 2A<br>4x 20m Koaksijalni kabl + napajanje (sa konektorima)<br>1x Razdelnik 1 /4 | 150,00 | 125,00 |

## ANALOGNE DOME KAMERE 2MP

## UAC-T112-AF28



| | | | |
|---|---|---|---|
| I1066 | **2MP HD Fixed IR Turret Analog Camera**<br>2MP high quality image<br>TVI/AHD/CVI/CVBS<br>IR-cut filter with auto switch (ICR)<br>Built-in microphone<br>Supports 180° horizontal flip, 180° vertical flip<br>OSD configuration menu, easy to operate<br>IP67 waterproof and dustproof design, high reliability<br>OSD configuration menu in 11 languages | 19,20 | 16,00 |

| | | | | |
|---|---|---|---|---|
| UAC-T122-AF28LM<br> | I1054 | **2MP LightHunter HD IR Fixed Turret Analog Camera**<br>High quality imaging with 2MP resolution<br>TVI/AHD/CVI/CVBS<br>Supports IR-cut filter with auto-switch (ICR)<br>LightHunter monitoring with high-sensitivity sensor<br>3D noise reduction technology delivers clean and sharp images<br>Supports 180° horizontal flip, 180° vertical flip<br>OSD configuration menu, easy to operate<br>IP67 waterproof and dustproof design, high reliability<br>OSD configuration menu in 11 languages<br>Built-in microphone for high quality audio transmission via coaxial cables<br>Supports digital defog<br>3-Axis | 28,80 | 24,00 |
| UAC-T122-AF40LM<br> | I1099 | **2MP LightHunter HD IR Fixed Turret Analog Camera**<br>High quality imaging with 2MP resolution<br>TVI/AHD/CVI/CVBS<br>Supports IR-cut filter with auto-switch (ICR)<br>LightHunter monitoring with high-sensitivity sensor<br>3D noise reduction technology delivers clean and sharp images<br>Supports 180° horizontal flip, 180° vertical flip<br>OSD configuration menu, easy to operate<br>IP67 waterproof and dustproof design, high reliability<br>OSD configuration menu in 11 languages<br>Built-in microphone for high quality audio transmission via coaxial cables<br>Supports digital defog<br>3-Axis | 25,20 | 21,00 |
| UAC-T122-AF28M-W<br> | I1016 | **2MP ColorHunter HD Fixed Turret Analog Camera**<br>2MP high quality imaging<br>TVI/AHD/CVI/CVBS<br>Supports white light illumination, 24/7 color images<br>Supports 180° horizontal flip, 180° vertical flip<br>OSD configuration menu, easy to operate<br>IP67 waterproof and dustproof design, high reliability<br>OSD configuration menu in 11 languages<br>Built-in microphone for high quality audio transmission via coaxial cables<br>Supports digital defog<br>Metal front face and housing<br>3-Axis | 32,40 | 27,00 |
| UAC-T142-AF28LM-DL<br> | I1077 | **2MP ColorHunter Fixed Dual-light Turret Analog Camera**<br>High quality imaging with 2MP resolution<br>TVI/AHD/CVI/CVBS<br>Supports IR-cut filter with auto-switch (ICR)<br>Smart Dual Light (only TVI)<br>3D noise reduction technology delivers clean and sharp images<br>Supports 180° horizontal flip, 180° vertical flip<br>OSD configuration menu, easy to operate<br>IP67 waterproof and dustproof design, high reliability<br>OSD configuration menu in 11 languages<br>Built-in microphone for high quality audio transmission via coaxial cables | 43,20 | 36,00 |
| **ANALOGNE BULLET KAMERE 2MP** | | | | |
| UAC-B112-AF28<br> | I1121 | **2MP Fixed IR Bullet Analog Camera**<br>2MP high quality image<br>TVI/AHD/CVI/CVBS<br>Supports IR-cut filter with auto-switch (ICR)<br>3D noise reduction technology delivers clean and sharp images<br>Supports 180° horizontal flip, 180° vertical flip<br>OSD configuration menu, easy to operate<br>IP67 waterproof and dustproof design, high reliability<br>OSD configuration menu in 11 languages<br>Built-in microphone for high quality audio transmission via coaxial cables | 19,20 | 16,00 |
| UAC-B122-AF28LM<br> | I1053 | **2MP LightHunter HD IR Fixed Mini Bullet Analog Camera**<br>High quality imaging with 2MP resolution<br>TVI/AHD/CVI/CVBS<br>Supports IR-cut filter with auto-switch (ICR)<br>LightHunter monitoring with high-sensitivity sensor<br>3D noise reduction technology delivers clean and sharp images<br>Supports 180° horizontal flip, 180° vertical flip<br>OSD configuration menu, easy to operate<br>IP67 waterproof and dustproof design, high reliability<br>OSD configuration menu in 11 languages<br>Built-in microphone for high quality audio transmission via coaxial cables<br>Supports digital defog | 28,80 | 24,00 |

## UAC-B122-AF40LM



I1098

**2MP LightHunter HD IR Fixed Mini Bullet Analog Camera**
High quality imaging with 2MP resolution
TVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
LightHunter monitoring with high-sensitivity sensor
3D noise reduction technology delivers clean and sharp images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables
Supports digital defog

28,80 | 24,00

## UAC-B122-AF28M-W



I1014

**2MP ColorHunter HD Fixed Mini Bullet Analog Camera**
2MP high quality imaging
TVI/AHD/CVI/CVBS
Supports white light illumination, 24/7 color images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
SD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables
Supports digital defog
Metal front face and housing

32,40 | 27,00

## UAC-B122-AF28M-W-Black

NOVO



I1214

**2MP ColorHunter HD Fixed Mini Bullet Analog Camera**
2MP high quality imaging
TVI/AHD/CVI/CVBS
Supports white light illumination, 24/7 color images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
SD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables
Supports digital defog
Metal front face and housing

32,40 | 27,00

## UAC-B122-AF40M-W



I1015

**2MP ColorHunter HD Fixed Mini Bullet Analog Camera**
2MP high quality imaging
TVI/AHD/CVI/CVBS
Supports white light illumination, 24/7 color images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables
Supports digital defog
Metal front face and housing

32,40 | 27,00

## UAC-B142-AF28LM-DL



I1076

**2MP ColorHunter Fixed Dual-light Bullet Analog Camera**
High quality imaging with 2MP resolution
TVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
Smart Dual Light (only TVI)
3D noise reduction technology delivers clean and sharp images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables

43,20 | 36,00

| | | | | |
|---|---|---|---|---|
| UAC-B142-AF40LM-DL<br> | I1122 | **2MP ColorHunter Fixed Dual-light Bullet Analog Camera**<br>High quality imaging with 2MP resolution<br>TVI/AHD/CVI/CVBS<br>Supports IR-cut filter with auto-switch (ICR)<br>Smart Dual Light (only TVI)<br>3D noise reduction technology delivers clean and sharp images<br>Supports 180° horizontal flip, 180° vertical flip<br>OSD configuration menu, easy to operate<br>IP67 waterproof and dustproof design, high reliability<br>OSD configuration menu in 11 languages<br>Built-in microphone for high quality audio transmission via coaxial cables | 43,20 | 36,00 |
| **ANALOGNE DOME KAMERE 5MP** | | | | |
| UAC-T115-AF28<br> | I1126 | **5MP Fixed IR Turret Analog Camera**<br>5MP high quality image<br>TVI/AHD/CVI/CVBS<br>Supports IR-cut filter with auto-switch (ICR)<br>Supports 180° horizontal flip, 180° vertical flip<br>OSD configuration menu, easy to operate<br>IP67 waterproof and dustproof design, high reliability<br>OSD configuration menu in 11 languages<br>Built-in microphone for high quality audio transmission via coaxial cables | 25,20 | 21,00 |
| UAC-T125-AF28LM<br> | I1056 | **5MP LightHunter HD IR Fixed Turret Analog Camera**<br>High quality imaging with 5MP resolution<br>TVI/AHD/CVI/CVBS<br>Supports IR-cut filter with auto-switch (ICR)<br>LightHunter monitoring with high-sensitivity sensor<br>Supports 180° horizontal flip, 180° vertical flip<br>OSD configuration menu, easy to operate<br>IP67 waterproof and dustproof design, high reliability<br>OSD configuration menu in 11 languages<br>Built-in microphone for high quality audio transmission via coaxial cables<br>3-Axis | 38,40 | 32,00 |
| UAC-T125-AF28M-W<br> | I1020 | **5MP ColorHunter HD Fixed Turret Analog Camera**<br>5MP high quality imaging<br>TVI/AHD/CVI/CVBS<br>Supports white light illumination, 24/7 color images<br>Supports 180° horizontal flip, 180° vertical flip<br>OSD configuration menu, easy to operate<br>IP67 waterproof and dustproof design, high reliability<br>OSD configuration menu in 11 languages<br>Built-in microphone for high quality audio transmission via coaxial cables<br>Metal front face and housing<br>3-Axis | 40,80 | 34,00 |
| UAC-T145-AF28LM-DL<br> | I1079 | **5MP ColorHunter Fixed Dual-light Turret Analog Camera**<br>High quality imaging with 5MP resolution<br>TVI/AHD/CVI/CVBS<br>Supports IR-cut filter with auto-switch (ICR)<br>Smart Dual Light (only TVI)<br>Supports 180° horizontal flip, 180° vertical flip<br>OSD configuration menu, easy to operate<br>IP67 waterproof and dustproof design, high reliability<br>OSD configuration menu in 11 languages<br>Built-in microphone for high quality audio transmission via coaxial cables | 50,40 | 42,00 |
| **ANALOGNE BULLET KAMERE 5MP** | | | | |
| UAC-B115-F28<br> | I1002 | **5MP HD Fixed IR Mini Bullet Analog Camera**<br>5MP high quality image<br>TVI/AHD/CVI/CVBS<br>IR-cut filter with auto switch (ICR)<br>Supports 180° horizontal flip, 180° vertical flip<br>OSD configuration menu, easy to operate<br>IP67 waterproof and dustproof design, high reliability<br>OSD configuration menu in 11 languages | 24,00 | 20,00 |

## UAC-B115-AF28



I1125

**5MP Fixed IR Bullet Analog Camera**
5MP high quality imageTVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables

25,20 21,00

## UAC-B125-AF28LM



I1055

**5MP LightHunter HD IR Fixed Mini Bullet Analog Camera**
High quality imaging with 5MP resolution
TVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
LightHunter monitoring with high-sensitivity sensor
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables

38,40 32,00

## UAC-B125-AF40LM



I1124

**5MP LightHunter HD IR Fixed Mini Bullet Analog Camera**
High quality imaging with 5MP resolution
TVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
LightHunter monitoring with high-sensitivity sensor
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables

38,40 32,00

## UAC-B125-AF28M-W



I1018

**5MP ColorHunter HD Fixed Mini Bullet Analog Camera**
5MP high quality imaging
TVI/AHD/CVI/CVBS
Supports white light illumination, 24/7 color images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables
Metal front face and housing

40,80 34,00

## UAC-B125-AF40M-W



I1019

**5MP ColorHunter HD Fixed Mini Bullet Analog Camera**

5MP high quality imaging
TVI/AHD/CVI/CVBS
Supports white light illumination, 24/7 color images
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables
Metal front face and housing

40,80 34,00

## UAC-B145-AF28LM-DL



I1078

**5MP ColorHunter Fixed Dual-light Bullet Analog Camera**
High quality imaging with 5MP resolution
TVI/AHD/CVI/CVBS
Supports IR-cut filter with auto-switch (ICR)
Smart Dual Light (only TVI)
Supports 180° horizontal flip, 180° vertical flip
OSD configuration menu, easy to operate
IP67 waterproof and dustproof design, high reliability
OSD configuration menu in 11 languages
Built-in microphone for high quality audio transmission via coaxial cables

50,40 42,00

## UAC-B315-ADZLM



| | | | | |
|---|---|---|---|---|
| I1185 | **5MP LightHunter VARIFOCAL IR Bullet Analog Camera**<br>High quality imaging with 5MP resolution<br>2.8mm-12mm motorized lens<br>TVI/AHD/CVI/CVBS<br>Illumination Distance: 50m<br>Supports IR cut filter with auto switch (ICR)<br>LightHunter monitoring with high sensitivity sensor<br>3D noise reduction technology delivers clean and sharp images<br>Supports 180° horizontal flip, 180° vertical flip<br>OSD configuration menu, easy to operate<br>IP67 waterproof and dustproof design, high reliability<br>OSD configuration menu in 11 languages<br>Built in microphone for high quality audio transmission via coaxial cables | | 90,00 | 75,00 |

## NVR UREDJAJI

### NVR301-04S3



| | | | | |
|---|---|---|---|---|
| I1049 | **4-ch NVR**<br>Rezolucija snimanja: 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p<br>Ulazno/Izlazni saobraćaj: 64/48Mbps<br>Video kompresija: Ultra 265, H.265, H.264 video kompresija,<br>Video/audio izlazi: HDMI 4K resolution /VGA (FULL HD),<br>Smart Funkcije:Face detection, Intrusion detection, Cross line detection,<br>Audio detection<br>ONVIF conformance: Profile S, Profile G, Profile T<br>Pretraga snimka po smart funkcijama: Face search, Behavior search,<br>Human Body search<br>Dodatni ulazi: RJ45 mrežni ulaz, 2 x USB2.0,Audio out 3.5mm<br>Mrežni protokoli: TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE<br>Hard disk prostor: 1 sata HDD do 6TB kapaciteta<br>Opšte: Napajanje 12V DC, Potrošnja 5W bez HDD,<br>Radna temperatura: -10 °C ~ +55 °C,<br>Dimenzije: 260mm × 240mm × 46mm (10.2"×9.4"×1.8 "), 1kg | | 98,40 | 82,00 |

### NVR301-04B-IQ



| | | | | |
|---|---|---|---|---|
| I1115 | **4-ch NVR**<br>Decoding Capability: Smart Off： 2 x 12MP@30, 2 x 4K@30, 4 x<br>4MP@30, 8 x 1080P@30<br>Smart On： 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30<br>Support Ultra 265/H.265/H.264 video formats<br>Support mainstream cameras of ONVIF conformance(Profile S,<br>Profile G, Profile T ) and RTSP protocols<br>Support HDMI and VGA simultaneous output<br>Up to 12 Megapixels resolution recording<br>ANR technology to enhance the storage reliability when the network is disconnected<br>Support cloud upgrade<br>1x HDD, up to 10TB | | 114,00 | 95,00 |

### NVR501-04B-IQ



| | | | | |
|---|---|---|---|---|
| I1150 | **4-ch NVR**<br>Decoding Capability:<br>Smart Off: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30<br>Smart On: 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30<br>Support Ultra H.265/H.265/H.264 video formats<br>Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution<br>Support HDMI and VGA simultaneous output<br>Up to 16 Megapixels resolution recording<br>ANR technology to enhance the storage reliability when the network is disconnected<br>Support cloud upgrade<br>1 SATA Interface, up to 16 TB | | 144,00 | 120,00 |

### NVR301-08S3



| | | | | |
|---|---|---|---|---|
| I1048 | **8-ch NVR**<br>Rezolucija snimanja: 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF<br>Ulazno/Izlazni saobraćaj: 64/48 Mbps<br>Video kompresija: Ultra 265, H.265, H.264 video kompresija,<br>Video/audio izlazi: 1-ch HDMI, 1-ch VGA, HDMI do 4K(3840x2160) rezolucije<br>Smart Funkcije: Face detection, Intrusion detection, Cross line detection, Audio detection<br>Pretraga snimka po smart funkcijama: Face search, Behavior search, Human Body search<br>ONVIF conformance: Profile S, Profile G, Profile T<br>Dodatni ulazi: RJ45 mrežni ulaz, 2xUSB 2.0,.<br>Mrežni protokoli: P2P, UPnP, NTP, DHCP, PPPoE<br>Hard disk prostor: 1 sata HDD do 6TB kapaciteta<br>Opšte: Napajanje 12V DC, Potrošnja 5W bez HDD,<br>Radna temperatura: -10 °C ~ +55 °C,<br>Dimenzije: 260mm × 240mm × 46mm, Težina 1Kg | | 108,00 | 90,00 |

## NVR301-08B-IQ



I1117

**8-ch NVR**

Decoding Capability: Smart Off： 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30
Smart On： 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30
Support Ultra 265/H.265/H.264 video formats
4/8/16 channel input
Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
Support HDMI and VGA simultaneous output
Up to 12 Megapixels resolution recording
ANR technology to enhance the storage reliability when the network is disconnected
Support cloud upgrade
1x HDD, up to 10TB

126,00 105,00

## NVR501-08B-IQ



I1118

**8-ch NVR**

Decoding Capability: Smart Off: Smart Off: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30
Smart On: 2 x 12MP@30, 2 x 4K@30, 6 x 4MP@30, 8 x 3MP@30
Smart On: 2 x 12MP@30, 2 x 4K@30, 6 x 4MP@30, 8 x 3MP@30, 12 x 1080P@30, 16 x 720P@30
Support Ultra H.265/H.265/H.264 video formats
Supports mainstream cameras of ONVIF conformance (Profile S, Profile G, Profile T ) and RTSP protocols
Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
Support HDMI and VGA simultaneous output
Up to 16 Megapixels resolution recording
ANR technology to enhance the storage reliability When the network is disconnected
Support cloud upgrade
1 SATA Interface, up to 16 TB

168,00 140,00

## NVR301-16S3



I1116

**16-ch NVR**

Rezolucija snimanja: 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p
Ulazno/Izlazni saobraćaj: 64/48Mbps
Video kompresija: Ultra 265, H.265, H.264 video kompresija,
Video/audio izlazi: HDMI 4K resolution /VGA (FULL HD),
Smart Funkcije:Face detection, Intrusion detection, Cross line detection, Audio detection
ONVIF conformance: Profile S, Profile G, Profile T
Pretraga snimka po smart funkcijama: Face search, Behavior search, Human Body search
Dodatni ulazi: RJ45 mrežni ulaz, 2 x USB2.0,Audio out 3.5mm
Mrežni protokoli: TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Hard disk prostor: 1 sata HDD do 6TB kapaciteta
Opšte: Napajanje 12V DC, Potrošnja 5W bez HDD,
Radna temperatura: -10 °C ~ +55 °C,
Dimenzije: 260mm × 240mm × 46mm (10.2"×9.4"×1.8 "), 1kg

128,40 107,00

## NVR301-16B-IQ



I1151

**16-ch NVR**

Decoding Capability – Smart Off： 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 10 x 1080P@30, 16 x 720P@30
Smart On： 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30, 16 x 720P@30
Support Ultra 265/H.265/H.264 video formats
Support mainstream cameras of ONVIF conformance (Profile S, Profile G, Profile T ) and RTSP protocols
Support HDMI and VGA simultaneous output
Up to 12 Megapixels resolution recording
ANR technology to enhance the storage reliability when the network is disconnected
Support cloud upgrade

177,60 148,00

## NVR501-16B



I1047

**16-ch NVR**
Rezolucija snimanja: 16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Ulazno/Izlazni saobraćaj: 80/64 Mbps
Video kompresija: Ultra 265/H.265/H.264
Video/audio izlazi: HDMI (4K) / HD, VGA
Smart Funkcije: Intrusion Detection, Cross Line Detection,Enter Area, Leave Area, Defocus Detection,Scene Change Detection, Object Left Behind, Object Removed,Auto Tracking, UMD(Ultra Motion Detection)
Statisticke analize: People counting
Dodatni ulazi: 1xRJ45 mrežni ulaz, 1xUSB 2.0, 1x USB 3.0
Mrežni protokoli: TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP,HTTPS, DNS, DDNS, SNMP, SMTP
Hard disk prostor: 1 sata HDD do 8TB kapaciteta
Opšte: Napajanje 12V DC, Potrošnja 15W bez HDD,
Radna temperatura: -10 °C ~ +55 °C,
Dimenzije: 260mm × 222mm × 47mm, Težina 0,98Kg

228,00 | 190,00

## NVR501-16B-IQ



I1119

**16-ch NVR**
Decoding Capability: Smart Off: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
Smart On: 2 x 12MP@30, 2 x 4K@30, 6 x 4MP@30, 8 x 3MP@30, 12 x 1080P@30, 16 x 720P@30
Support Ultra H.265/H.265/H.264 video formats
Supports mainstream cameras of ONVIF conformance (Profile S, Profile G, Profile T ) and RTSP protocols
Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
Support HDMI and VGA simultaneous output
Up to 16 Megapixels resolution recording
ANR technology to enhance the storage reliability When the network is disconnected
Support cloud upgrade
1 SATA Interface, up to 16 TB

276,00 | 230,00

## NVR502-16B-IQ

NOVO



I1180

**16-ch NVR**
Decoding Capability: Smart Off: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30
Smart On: 2 x 12MP@30, 2 x 4K@30, 6 x 4MP@30, 8 x 3MP@30, 12 x 1080P@30, 16 x 720P@30
Support Ultra H.265/H.265/H.264 video formats
Supports mainstream cameras of ONVIF conformance (Profile S, Profile G, Profile T ) and RTSP protocols
Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
Support HDMI and VGA simultaneous output
Up to 16 Megapixels resolution recording
ANR technology to enhance the storage reliability When the network is disconnected
Support cloud upgrade
2 SATA Interface, up to 16 TB per HDD

392,40 | 327,00

## NVR304-32X



I1154

**32-ch NVR**
32-KANALNI MREŽNI SNIMAČ
Rezolucija snimanja:
12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Ulazno/Izlazni saobraćaj: 384/384 Mbps
Video kompresija: Ultra 265, H.265, H.264 video kompresija,
Video/audio izlazi: HDMI1 (4K) / VGA I HDMI2 nezavisni izlazi, 1ch RCA
Smart Funkcije: Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking, Object left behind, Object removed, Face search, Behavior search
Statisticke analize: People counting
ONVIF conformance: Profile S, Profile G, Profile T
Dodatni ulazi: 2xRJ45 mrežni ulaz, 2xUSB 2.0, 1x USB 3.0, 1 x RS485, 1 x RS232, 16 x Alarmnih ulaza, 4 x Alarmnih izlaza
Mrežni protokoli: P2P, UPnP, NTP, DHCP, PPPoE
Hard disk prostor: 4 sata HDD do 10TB kapaciteta, RAID 1, 5
Opšte: Napajanje 12V DC, Potrošnja 25W bez HDD,
Radna temperatura: -10 °C ~ +55 °C,
Dimenzije: 442mm ×426mm× 89mm, Težina 5,7Kg

576,00 | 480,00

NVR502-32E-IX-G



1187

**2 HDDs 32-Ch Network Video Recorder**
Support Ultra H.265/H.265/H.264 video formats
Support 32-channel input
Support 2-ch HDMI, 2-ch VGA. HDMI up to 4K (3840x2160) resolution
Support HDMI and VGA independent output
Support up to 16 Megapixels resolution recording
Support ANR technology to enhance the storage reliability when the network is disconnected
Support SeekFree function: up to 16-ch with 3rd party IPC, up to 32-ch
With UNV SIP/UMD IPC
Support external USB keyboards
Support Video Metadata, Diverse Algorithms by NVR
Support cloud upgrade

1080,00 900,00

## DOME IP KAMERE 2MPX

IPC3612LB-SF28-A






I1144

**2MP Fixed IR Turret Network Camera**
High quality image with 1080P, 1/2.8" CMOS sensor
1080P (1920 × 1080)@30/25 fps; 720P (1280 × 720)@30/25 fps
Ultra 265, H.265, H.264
Smart IR, up to 30 m (98.4 ft) IR distance
Day/night functionality
2D/3D DNR (digital noise reduction)
IP67 protection
Supports PoE power supply
3-axis

52,80 44,00

IPC322LB-SF28-A







I1174

**2MP Vandal-resistant Network IR Fixed Dome Camera**
High quality image with 2MP, 1/2.8"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264
Smart IR, up to 30m (98ft) IR distance
Day/night functionality
2D/3D DNR (Digital Noise Reduction)
IP67 protection
IK10 vandal resistant
Support PoE power supply
2-Axis

52,80 44,00

IPC322LB-AF28WK-G






I1008

**2MP WIFI Fixed Dome Network Camera**
High quality image with 2MP, 1/2.9"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
IK10 vandal resistant
IP67 protection
3-Axis

68,40 57,00

IPC322LB-DSF28K-G



I1177

**High quality image with 2MP, 1/2.7"CMOS sensor**
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
IK10 vandal resistant
IP67 protection
Support PoE power supply

66,00 55,00

IPC3622LE-ADF28K-WP



I1112

**2MP ColorHunter Wise-ISP Fixed Warm Light Turret Network Camera**
High quality image with 2MP, 1/2.7" CMOS sensor and F1.0 large aperture lens
2MP (1920 × 1080)@30/25 fps; 720P (1280 × 720)@30/25 fps
Ultra 265, H.265, H.264, MJPEG
Support ColorHunter with Wise-ISP technology, deeply optimizing color,
Detail, and smear effects in extremely low-light scenes
120 dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
White Light, up to 30 m (98 ft) warm light distance
Supports up to 512 GB Micro SD Card
IP67 protection
Support PoE power supply
3-Axis

102,00 85,00

IPC3612LE-ADF28KC-WL



I1038

**2MP HD ColorHunter IR Fixed Eyeball Network Camera**
High quality image with 2MP, 1/2.8"CMOS sensor
2MP (1920*1080) @30/25fps; 720P (1280*720) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic & Speaker
Smart IR, up to 30m (98ft) IR distance
White Light, up to 30m (98ft) white light distance
Supports 128 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

105,60 88,00

IPC3532LB-ADZK-G-BLACK



I1092

**2MP HD IR VF (2.8 ~ 12mm) Dome Network Camera**
High quality image with 2MP, 1/2.7"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 40m (131ft) IR distance
Supports 128 G Micro SD card
IK10 vandal resistant
IP67 protection
Support PoE power supply
3-Axis

108,00 90,00

## BULLET IP KAMERE 2MPX

IPC2122LB-SF28-A



I1143

**2MP Mini Fixed Bullet Network Camera**
High quality image with 2MP, 1/2.8"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264
Smart IR, up to 30m (98ft) IR distance
Day/night functionality
2D/3D DNR (Digital Noise Reduction)
IP67 protection
Support PoE power supply
3-Axis

52,80 44,00

IPC2122LB-SF40-A






I1173

**2MP Mini Fixed Bullet Network Camera**
High quality image with 2MP, 1/2.8"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264
Smart IR, up to 30m (98ft) IR distance
Day/night functionality
2D/3D DNR (Digital Noise Reduction)
IP67 protection
Support PoE power supply
3-Axis

52,80 44,00

IPC2122LB-AF28WK-G






I1009

**2MP HD WIFI Bullet Network Camera**
High quality image with 2MP, 1/2.9"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
IP67 protection
3-Axis

66,00 55,00

IPC2122LB-AF40WK-G BLACK






I1093

**2MP HD WIFI Bullet Network Camera**
High quality image with 2MP, 1/2.9"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
IP67 protection
3-Axis

66,00 55,00

IPC2122LB-ADF40KM-G






I1175

**2MP HD WDR Fixed IR Bullet Network Camera**
High quality image with 2MP, 1/2.7"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
Support PoE power supply
3-Axis

60,00 50,00

IPC2122LB-AF28K-WL






I1050

**2MP HD ColorHunter Mini Fixed Bullet Network Camera**
High quality image with 2MP, 1/2.9"CMOS sensor
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra H.265,H.265, H.264
Built-in Mic
Warm Light, up to 30m (98ft) warm light distance
2D/3D DNR (Digital Noise Reduction)
Support 128GB Micro SD card
IP67 protection
Support PoE power supply
3-Axis

90,00 75,00

IPC2312LE-ADF28KM-WP




I1111

**2MP ColorHunter with Wise-ISP Fixed Bullet Network Camera**
High quality image with 2MP, 1/2.7"CMOS sensor and F1.0 large aperture lens
2MP (1920*1080) @30/25fps; 720P (1280*720) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
Colorhunter with Wise-ISP technology ensures 24-hour full-color images
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
White Light, up to 30m warm light distance
Supports 512 GB Micro SD card
IP67 protection
Support PoE power supply
3-Axis

102,00 85,00

IPC2122LE-ADF28KMC-WL




I1028

**2MP HD ColorHunter Mini IR Fixed Bullet Network Camera**
High quality image with 2MP, 1/2.8"CMOS sensor
2MP (1920*1080) @30/25fps; 720P (1280*720) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic & Speaker
Smart IR, up to 30m (98ft) IR distance
White Light, up to 30m (98ft) white light distance
Supports 128 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

103,20 86,00

## BULLET IP KAMERE 3MPX

IPC2123LB-AF28KM-G




I1037

**3MP HD Fixed IR Bullet Network Camera**
High quality image with 3MP, 1/2.7"CMOS sensor
3MP (2304*1296)@30/25fps; 2MP (1920*1080)@30/25fps;
Ultra 265, H.265, H.264, MJPEG
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

72,00 60,00

## DOME IP KAMERE 4MPX

IPC3614LB-SF28-A




I1030

**4MP Fixed Dome Network Camera**
High quality image with 4MP, 1/3"CMOS sensor
4MP (2560*1440)@25/20fps; 3MP (2304*1296)@30/25fps; 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart IR, up to 30m (98ft) IR distance
Support PoE power supply
3-Axis

69,60 58,00

IPC3614LB-SF28-A Black




I1058

**4MP Fixed Dome Network Camera**
High quality image with 4MP, 1/3"CMOS sensor
4MP (2560*1440)@25/20fps; 3MP (2304*1296)@30/25fps; 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart IR, up to 30m (98ft) IR distance
Support PoE power supply
3-Axis

69,60 58,00

IPC3614LB-AF28K-A2




| | | | |
|---|---|---|---|
| I1178 | **4MP IR Eyeball Network Camera**<br>High quality image with 4 MP, 1/3.0" CMOS sensor<br>4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps<br>Supports accurate human body detection 2.0<br>Ultra 265, H.265, H.264<br>Built-in mic<br>Smart IR, up to 30 m (98.4 ft) IR distance<br>Day/night functionality<br>2D/3D DNR (digital noise reduction)<br>MicroSD, up to 512 GB<br>DC 12 V, PoE (IEEE 802.3af) power supply<br>IP67 protection<br>3-axis | 75,60 | 63,00 |

IPC324LB-AF28K-A2




| | | | |
|---|---|---|---|
| I1010 | **4MP Fixed IR Dome Network Camera**<br>High quality image with 4 MP, 1/3.0" CMOS sensor<br>4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps<br>Supports accurate human body detection 2.0<br>Ultra 265, H.265, H.264<br>Built-in mic<br>Smart IR, up to 30 m (98.4 ft) IR distance<br>Day/night functionality<br>2D/3D DNR (digital noise reduction)<br>MicroSD, up to 512 GB<br>DC 12 V, PoE (IEEE 802.3af) power supply<br>IP67 protection<br>IK10 vandal resistant<br>2-axis | 75,60 | 63,00 |

IPC3624LE-ADF28K-WP




| | | | |
|---|---|---|---|
| I1086 | **4MP ColorHunter Wise-ISP Fixed Warm Light Turret Network Camera**<br>High quality image with 4MP, 1/1.8"CMOS sensor and F1.0 large aperture lens<br>4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps<br>Ultra 265, H.265, H.264, MJPEG<br>Support ColorHunter with Wise-ISP technology, deeply optimizing color, detail,<br>And smear effects in extremely low-light scenes<br>120dB true WDR technology enables clear image in strong light scene<br>Support 9:16 Corridor Mode<br>Built-in Mic<br>White Light, up to 30m (98ft) warm light distance<br>Supports 512 GB Micro SD card<br>IP67 protection<br>Support PoE power supply<br>3-Axis | 120,00 | 100,00 |

IPC3524LE-ADF28K-WP




| | | | |
|---|---|---|---|
| I1084 | **4MP ColorHunter Wise-ISP Fixed Dome Network Camera**<br>High quality image with 4MP, 1/1.8"CMOS sensor and F1.0 large aperture lens<br>4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps;<br>3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps<br>Ultra 265, H.265, H.264, MJPEG<br>Support ColorHunter with Wise-ISP technology, deeply optimizing color,<br>detail, and smear effects in extremely low-light scenes<br>120dB true WDR technology enables clear image in strong light scene<br>Support 9:16 Corridor Mode<br>Built-in Mic<br>Supports 512 GB Micro SD card<br>IP67 protection<br>IK10 protection<br>Support PoE power supply<br>3-Axis | 120,00 | 100,00 |

IPC3614LE-ADF28K-H




| | | | |
|---|---|---|---|
| I1137 | **4MP EasyStar Fixed IR Turret Network Camera**<br>High quality image with 4MP, 1/3" CMOS sensor<br>4MP (2688 × 1520)@25/20 fps; 4MP (2560 × 1440)@25/20 fps; 3MP (2304 × 1296)@30/25 fps; 2MP (1920 × 1080)@30/25 fps<br>Ultra 265, H.265, H.264, MJPEG<br>Easystar technology ensures high image quality in low illumination environment<br>120 dB true WDR technology enables clear image in strong light scene<br>Support 9:16 Corridor Mode<br>Built-in Mic<br>Smart IR, up to 30 m (98 ft) IR distance<br>Supports up to 512 GB Micro SD Card<br>IP67 protection<br>Support PoE power supply<br>3-Axis | 102,00 | 85,00 |

| | | | | | |
|---|---|---|---|---|---|
| IPC3614LE-ADF28KC-WL<br>EASYSTAR<br><br> | I1040 | **4MP HD ColorHunter IR Fixed Eyeball Network Camera**<br>High quality image with 4MP, 1/3"CMOS sensor<br>4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps;<br>3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;<br>Ultra 265, H.265, H.264, MJPEG<br>120dB true WDR technology enables clear image in strong light scene<br>Support 9:16 Corridor Mode<br>Built-in Mic & Speaker<br>Smart IR, up to 30m (98ft) IR distance<br>White Light, up to 30m (98ft) white light distance<br>Supports 128 G Micro SD card<br>IP67 protection<br>Support PoE power supply<br>3-Axis | 138,00 | 115,00 |
| IPC3614SB-ADF28KMC-I0<br>PRIME<br><br> | I1194 | **4MP HD Intelligent Light and Audible Warning Fixed Eyeball Network Camera**<br>High quality image with 4MP, 1/2.7"CMOS sensor<br>4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;<br>Ultra 265, H.265, H.264, MJPEG<br>Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection<br>Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle<br>Supports sound and light alarm linkage.When Smart intrusion prevention is triggered The camera links sound alarm and light linkage.<br>Intelligent People Flow Counting and Crowd Density Monitoring<br>120dB true WDR technology enables clear image in strong light scene<br>Support 9:16 Corridor Mode<br>Built-in Mic and Speaker<br>Smart IR, up to 30m (98ft) IR distance<br>Supports 256 G Micro SD card<br>IP67 protection<br>Support PoE power supply | 120,00 | 100,00 |
| IPC3614SB-ADF40KMC-I0<br>PRIME<br><br> | I1094 | **4MP HD Intelligent Light and Audible Warning Fixed Eyeball Network Camera**<br>High quality image with 4MP, 1/2.7"CMOS sensor<br>4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;<br>Ultra 265, H.265, H.264, MJPEG<br>Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection<br>Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle<br>Supports sound and light alarm linkage.When Smart intrusion prevention is triggered , the camera links sound alarm and light linkage.<br>Intelligent People Flow Counting and Crowd Density Monitoring<br>120dB true WDR technology enables clear image in strong light scene<br>Support 9:16 Corridor Mode<br>Built-in Mic and Speaker<br>Smart IR, up to 30m (98ft) IR distance<br>Supports 256 G Micro SD card<br>IP67 protection<br>Support PoE power supply | 120,00 | 100,00 |
| IPC354SB-ADNF28K-I0<br>PRIME<br><br> | i1087 | **4MP LightHunter Fixed IR Dome Network Camera**<br>High quality image with 4MP, 1/2.7"CMOS sensor<br>4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps;<br>3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps<br>Ultra 265, H.265, H.264, MJPEG<br>Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection<br>Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and,<br>Motor vehicle and non-motor vehicle<br>Intelligent People Flow Counting and Crowd Density Monitoring<br>120dB true WDR technology enables clear image in strong light scene<br>Support 9:16 Corridor Mode<br>Built-in Mic<br>Smart IR, up to 30m (98 ft) IR distance<br>Supports 512 G Micro SD card<br>Cable-free<br>Support PoE power supply | 180,00 | 150,00 |

IPC3534LB-ADZK-G



I1166

**4MP HD IR VF (2.8 ~ 12mm) Dome Network Camera**
High quality image with 4MP, 1/3"CMOS sensor
4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296)@ 30/25fps;2MP (1920*1080)@30/25fps
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 40m (131ft) IR distance
Supports 256 G Micro SD card
IK10 vandal resistant
IP67 protection
Support PoE power supply
3-Axis

168,00 | 140,00

## BULLET IP KAMERE 4MPX

IPC2124LB-SF28-A




I1011

**4MP Fixed IR Mini Bullet Network Camera**
High quality image with 4MP, 1/3.0"CMOS sensor
4MP (2560*1440)@25/20fps; 3MP (2304*1296)@25/20fps; 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
H.265, H.264
Smart IR, up to 30m (98ft) IR distance
Day/night functionality
2D/3D DNR (Digital Noise Reduction)
IP67 protection
DC12V or PoE(IEEE 802.3af) power supply
3-Axis

69,60 | 58,00

IPC2124LB-SF40-A

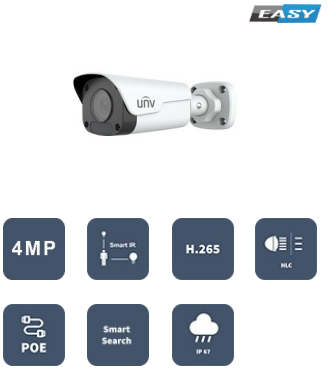

I1081

**4MP Fixed IR Mini Bullet Network Camera**
High quality image with 4MP, 1/3.0"CMOS sensor
4MP (2560*1440)@25/20fps; 3MP (2304*1296)@25/20fps; 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
H.265, H.264
Smart IR, up to 30m (98ft) IR distance
Day/night functionality
2D/3D DNR (Digital Noise Reduction)
IP67 protection
DC12V or PoE(IEEE 802.3af) power supply
3-Axis

69,60 | 58,00

IPC2124LB-AF28K-A2



I1155

**4MP Fixed IR Bullet Network Camera**
High quality image with 4 MP, 1/3.0" CMOS sensor
4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
Supports accurate human body detection 2.0
Ultra 265, H.265, H.264
Built-in mic
Smart IR, up to 30 m (98.4 ft) IR distance
Day/night functionality
2D/3D DNR (digital noise reduction)
MicroSD, up to 512 GB
DC 12 V, PoE (IEEE 802.3af) power supply
IP67 protection
3-axis

75,60 | 63,00

IPC2124LB-ADF40KM-H



I1075


**4MP Mini Fixed Bullet Network Camera**
High quality image with 4MP, 1/2.9"CMOS sensor
4MP (2560*1440)@25/20fps; 3MP (2304*1296)@30/25fps;
2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
Built-in Mic
Ultra 265, H.265, H.264, MJPEG
Smart IR, up to 30m (98ft) IR distance
Supports 128 G Micro SD card
Support PoE power supply
120dB WDR
3-Axis

108,00 | 90,00

| | | | | | |
|---|---|---|---|---|---|
| IPC2314LE-ADF28KM-WP<br>EASYSTAR<br><br> | I1085 | **4MP ColorHunter with Wise-ISP Fixed Bullet Network Camera**<br>High quality image with 4MP, 1/1.8"CMOS sensor and F1.0 large aperture lens<br>4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;<br>Ultra 265, H.265, H.264, MJPEG<br>Colorhunter with Wise-ISP technology ensures 24-hour full-color images<br>120dB true WDR technology enables clear image in strong light scene<br>Support 9:16 Corridor Mode<br>Built-in Mic<br>White Light, up to 30m warm light distance<br>Supports 512 GB Micro SD card<br>IP67 protection<br>Support PoE power supply<br>3-Axis | 120,00 | 100,00 |
| IPC2314LE-ADF40KM-WP<br>NOVO<br>EASYSTAR<br><br> | I1184 | **4MP ColorHunter with Wise-ISP Fixed Bullet Network Camera**<br>High quality image with 4MP, 1/1.8"CMOS sensor and F1.0 large aperture lens<br>4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;<br>Ultra 265, H.265, H.264, MJPEG<br>Colorhunter with Wise-ISP technology ensures 24-hour full-color images<br>120dB true WDR technology enables clear image in strong light scene<br>Support 9:16 Corridor Mode<br>Built-in Mic<br>White Light, up to 30m warm light distance<br>Supports 512 GB Micro SD card<br>IP67 protection<br>Support PoE power supply<br>3-Axis | 120,00 | 100,00 |
| IPC2124LE-ADF28KMC-WL<br>EASYSTAR<br><br> | I1148 | **4MP ColorHunter Fixed Bullet Network Camera**<br>High quality image with 4 MP, 1/3.0" CMOS sensor<br>4 MP (2688 × 1520)@25/20 fps; 4 MP (2560 × 1440)@25/20 fps;<br>3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps<br>Ultra 265, H.265, H.264, MJPEG<br>120 dB true WDR technology enables clear image in strong light scene<br>Supports 9:16 corridor mode<br>Built-in mic and speaker<br>Smart IR, up to 30 m (98.4 ft) IR distance<br>White light, up to 30 m (98.4 ft) white light distance<br>MicroSD, up to 512 GB<br>IP67 protection<br>Supports PoE power supply<br>3-axis | 128,40 | 107,00 |
| IPC2314LE-ADF28KM-WL<br>EASYSTAR<br><br> | I1029 | **4MP HD ColorHunter Fixed Bullet Network Camera**<br>High quality image with 4MP, 1/1.8"CMOS sensor and F1.0 large aperture lens<br>4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;<br>Ultra 265, H.265, H.264, MJPEG<br>Colorhunter technology ensures 24-hour full-color images<br>120dB true WDR technology enables clear image in strong light scene<br>Support 9:16 Corridor Mode<br>Built-in Mic<br>White Light, up to 30m white light distance<br>Supports 128 GB Micro SD card<br>IP67 protection<br>Support PoE power supply<br>3-Axis | 159,60 | 133,00 |
| IPC2124SB-ADF28KM-I0<br>PRIME<br><br> | I1088 | **4MP HD Intelligent LightHunter IR Fixed Bullet Network Camera**<br>High quality image with 4MP, 1/3"CMOS sensor<br>4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps<br>Ultra 265, H.265, H.264, MJPEG<br>Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection<br>Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle<br>Intelligent People Flow Counting and Crowd Density Monitoring<br>LightHunter technology ensures ultra-high image quality in low illumination environment<br>120dB true WDR technology enables clear image in strong light scene<br>Support 9:16 Corridor Mode<br>Built-in Mic<br>Smart IR, up to 40m (131ft) IR distance<br>Supports 512 G Micro SD card<br>IP67 protection<br>Support PoE power supply | 162,00 | 135,00 |

IPC2314SB-ADF60KM-I0





I1097

**4MP HD Intelligent 80m IR Fixed Bullet Network Camera**
High quality image with 4MP, 1/2.7"CMOS sensor
4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle And non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in 2 Mic
Smart IR, up to 80m (262 ft) IR distance
Supports 256 G Micro SD card
IP67 protection

144,00 120,00

IPC2314SB-ADF40KM-I0





I1167


**4MP LightHunter Fixed IR Bullet Network Camera**
High quality image with 4MP, 1/2.7"CMOS sensor
4MP (2688*1520)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in 2 Mic
Smart IR, up to 80m (262 ft) IR distance
Supports 512 G Micro SD card
IP67 protection

144,00 120,00

IPC2324LE-ADZK-DL3








I1193

**4MP WDR Bullet Varifocal Network Camera**
High quality image with 4 MP, 1/3.0" CMOS sensor
4 MP (2688 × 1520)@25/20 fps; 4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG (Sub Stream Only)
Wise-ISP technology ensures 24-hour full-color images
Support cross line, intrusion detection (based on human body detection)
Support ultra motion detection (human/ vehicle detection)
120 dB true WDR technology enables clear image in strong light scene
Built in mic
Supports 9:16 corridor mode
Smart IR, up to 50 m (164.0 ft) IR distance
Warm light, up to 50 m (164.0 ft) warm light distance
IP67 protection
MicroSD, up to 512 G

198,00 165,00

PKC2640@Z28-IR-P






Built-in lens supports motorized zoom to adapt to different scenes and allows for easy installation.
Automatic gain control, white balance, and WDR for various light conditions.
Compression
Supports triple streams.
Advanced H.265 encoding technology improves compression efficiency.
Custom OSD allows various vehicle information to be overlaid on the video image.
Functions
Built-in vehicle and license plate recognition algorithm can recognize
standard license plates of multiple countries.
Supports capturing vehicle head only.
Supports plate allowlist and blocklist configuration.
Supports vehicle access control when connected to a barrier.
Supports Micro SD cards of up to 256GB.
Automatic network replenishment (ANR) allows to automatically
store video to SD card in case of network disconnection.
Supports audio collection and intercom.


| | | | |
|---|---|---|---|
| I1120 | Network | 840,00 | 700,00 |

Network auto-adaptability ensures smooth live video in relatively bad
network conditions such as packet loss.
Supports SNMP.
Supports UNP for NAT traversal between public and private networks.
Supports integration with the third party via SDK or HTTP.
Network Security
Supports authorized user access by password. Weak password
detection and account lock-up when failed login attempts reach the
Upper limit enhance password security.
Supports Web access via HTTPS.
RTSP authentication prevents unauthorized video stream requests.
IP address filtering prevents illegal access from untrusted IP addresses.
Gateway ARP protection prevents MAC address spoofing.
Structure
Supports DC 12V and PoE (802.3at) power supplies.
Cast aluminum body offers excellent heat dissipation.

## DOME IP KAMERE 5MPX

IPC3615LB-SF28-A






**5MP Fixed IR Turret Network Camera**
High quality image with 5 MP, 1/3.0" CMOS sensor
5 MP (2592 × 1944)@20 fps; 4 MP (2560 × 1440)@20 fps;
3 MP (2304 × 1296)@20 fps; 1080P (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG

| | | | |
|---|---|---|---|
| I1147 | Smart IR, up to 30 m (98.4 ft) IR distance | 78,00 | 65,00 |

Day/night functionality
2D/3D DNR (digital noise reduction)
IP67 protection
DC 12 V, PoE (IEEE 802.3af) power supply
3-axis

IPC3635LB-ADZK-G






**5MP HD IR VF Eyeball Network Camera**
High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 25/20fps; 4MP (2560*1440)@ 25/20fps;
3MP (2304*1296)@ 30/25fps;2MP (1920*1080)@30/25fps
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene


| | | | |
|---|---|---|---|
| I1139 | Support 9:16 Corridor Mode | 168,00 | 140,00 |

Built-in Mic
Smart IR, up to 40m (131ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

IPC3615SS-ADF28K-I1

PRIME






I1105

**5MP HD Intelligent LightHunter IR Fixed Turret Dome Network Camera**
High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 30/25(default)fps; 4MP (2560*1440)@ 30/25fps;
3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Intelligent perimeter protection, include cross line, intrusion, enter area,
leave area detection
Based on target classification, smart intrusion prevention significantly
reduce false alarm caused by leaves, birds and lights etc., accurately
focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
Auto Scene Match (ASM) (WDR only)
LightHunter technology ensures ultra-high image quality in low
Illumination environment
130dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 40m (131ft) IR distance
Supports 256 G Micro SD card
IP67 protection

192,00 160,00

IPC3615SE-ADF28KM-WL-I0

PRIME






I1161

**5MP HD Intelligent ColorHunter Fixed Eyeball Network Camera**
High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@30/25fps; 4MP (2560*1440)@30/25fps;3MP (2304*1296)@30/25fps; 2MP
(1920*1080)@30/25fps;
Ultra 265, H.265, H.264, MJPEG
Intelligent perimeter protection, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce
False alarm caused by leaves,
Birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
Colorhunter technology ensures 24-hour full-color images
120dB true WDR technology enables clear image in strong light scene
Support 9:16 corridor Mode
Support built-in Mic
Support 256 G Micro SD card
IP67 protection
Support PoE power supply

168,00 140,00

## BULLET IP KAMERE 5MPX

IPC2125LB-SF28-A

EASY






I1145

5MP Fixed IR Bullet Network Camera
High quality image with 5 MP, 1/3.0" CMOS sensor
5 MP (2592 × 1944)@20 fps; 4 MP (2560 × 1440)@20 fps;
3 MP (2304 × 1296)@20 fps; 1080P (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG
Smart IR, up to 30 m (98.4 ft) IR distance
Day/night functionality
2D/3D DNR (digital noise reduction)
IP67 protection
DC 12 V, PoE (IEEE 802.3af) power supply
3-axis

78,00 65,00

IPC2125LB-SF40-A

EASY






I1146

5MP Fixed IR Bullet Network Camera
High quality image with 5 MP, 1/3.0" CMOS sensor
5 MP (2592 × 1944)@20 fps; 4 MP (2560 × 1440)@20 fps;
3 MP (2304 × 1296)@20 fps; 1080P (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG
Smart IR, up to 30 m (98.4 ft) IR distance
Day/night functionality
2D/3D DNR (digital noise reduction)
IP67 protection
DC 12 V, PoE (IEEE 802.3af) power supply
3-axis

78,00 65,00

IPC2125LE-ADF28KM-G







I1041

**5MP HD Mini IR Fixed Bullet Network Camera**
High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 25/20fps; 4MP (2560*1440)@ 25/20fps;
3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;
Ultra 265, H.265, H.264, MJPEG
IC domet: do 50m
Easystar technology ensures high image quality in low illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 50m (164ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

132,00 110,00

IPC2125SB-ADF40KMC-I0






I1095

**5MP HD Intelligent Light and Audible Warning Fixed Bullet Network Camera**
High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Supports sound and light alarm linkage.When Smart intrusion prevention is triggered, The camera links sound alarm and light linkage.
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic and Speaker
Smart IR, up to 30m (98ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply

156,00 130,00

IPC2125SB-ADF28KM-I0








I1110


**5MP LightHunter Fixed IR Bullet Network Camera**
High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 30/25fps; 4MP (2560*1440)@ 30/25fps;
3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
LightHunter technology ensures ultra-high image quality in low Illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 40m (131ft) IR distance
Supports 512 G Micro SD card
IP67 protection
Support PoE power supply

150,00 125,00

IPC2125SB-ADF28KM-I0 BLACK









I1106

**5MP LightHunter Fixed IR Bullet Network Camera**
High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 30/25fps; 4MP (2560*1440)@ 30/25fps;
3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
LightHunter technology ensures ultra-high image quality in low Illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 40m (131ft) IR distance
Supports 512 G Micro SD card
IP67 protection
Support PoE power supply

150,00 125,00

IPC2125SB-ADF28KMC-I0






**5MP Tri-Guard Fixed Dual-light Bullet Network Camera**

I1156

High quality image with 5 MP, 1/2.7" CMOS sensor
5 MP (2880 × 1620)@30/25 fps; 4 MP (2560 × 1440)@30/25 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, including cross line, intrusion, enter area, leave area detection
Intelligent intrusion prevention system based on target classification significantly reduces false alarms caused by leaves, birds, and lights, accurately focusing on humans, vehicles, and non-motor vehicles
Supports sound and light alarm linkage. When smart intrusion prevention is triggered, the camera links sound alarm and light linkage
120 dB true WDR technology enables clear image in strong light scene
Supports 9:16 corridor mode
Built-in mic and speaker
Smart IR, up to 30 m (98.4 ft) IR distance
MicroSD, up to 512 GB
IP67 protection
Supports PoE power supply

**168,00** **140,00**

IPC2325LB-ADZK-H






**5MP HD IR VF (2.8 ~ 12mm) Bullet Network Camera**


I1069

High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;
Built-in Mic
Ultra 265, H.265, H.264, MJPEG
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Smart IR, up to 50m (164ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

**174,00** **145,00**

IPC2315SB-ADF40KM-I0






**5MP LightHunter Fixed IR Bullet Network Camera**


I1096

High quality image with 5MP, 1/2.7"CMOS sensor
5MP (2880*1620)@ 30/25fps; 4MP (2560*1440)@ 30/25fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor Vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in 2 Mic
Smart IR, up to 80m (262 ft) IR distance
Supports 512 G Micro SD card
IP67 protection

**186,00** **155,00**

IPC2225SE-DF40K-WL-I0






**5MP ColorHunter Fixed Warm Light Bullet Network Camera**

I1158

High quality image with 5 MP, 1/2.7" CMOS sensor
5 MP (2880 × 1620)@30/25 fps; 4 MP (2560 × 1440)@30/25 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG
Intelligent perimeter protection, including cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduces false alarm caused by leaves, birds and lights, accurately focusing on human, motor vehicle and non-motor vehicle
Intelligent people flow counting and crowd density monitoring
ColorHunter technology ensures 24-hour full-color images
120 dB true WDR technology enables clear image in strong light scene
Supports 9:16 corridor mode
Alarm I/O: 1/1, audio I/O: 1/1
MicroSD, up to 512 GB
IK10 vandal resistant and IP67 protection
Supports PoE power supply

**168,00** **140,00**

## DOME IP KAMERE 8MPX

### IPC328LE-ADF28K-G



I1013

**4K HD Vandal-resistant IR Fixed Dome Network Camera**
High quality image with 8MP, 1/2.7"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps; 4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Easystar technology ensures high image quality in low illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 256 G Micro SD card
IK10 vandal resistant
IP67 protection
Support PoE power supply
3-Axis

162,00 | 135,00

### IPC328SB-ADF28K-I0



I1043

**8MP HD Intelligent IR Fixed Dome Network Camera**
High quality image with 8MP, 1/2.7"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps;
4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Intelligent perimeter protection, include cross line, intrusion,
enter area, leave area detection
Based on target classification, smart intrusion prevention significantly
reduce false alarm caused by leaves, birds and lights etc., accurately
focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Alarm:1 in/1 out, Audio: 1 in/1 out
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 256 G Micro SD card
IK10 vandal resistant and IP67 protection

216,00 | 180,00

### IPC3618LE-ADF28K-G



I1162

**4K HD IR Fixed Eyeball Network Camera**
High quality image with 8MP, 1/2.7"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps; 4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Easystar technology ensures high image quality in low illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 30m (98ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

162,00 | 135,00

## BULLET IP KAMERE 8MPX

### IPC2318LE-ADF28KM-WP



I1113

**8MP ColorHunter Wise-ISP Warm Light Bullet Network Camera**
High quality image with 8MP, 1/1.8"CMOS sensor and F1.0 large aperture lens
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps; 4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Colorhunter with Wise-ISP technology ensures 24-hour full-color images
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
White Light, up to 30m warm light distance
Supports 512 GB Micro SD card
IP67 protection
Support PoE power supply
3-Axis

192,00 | 160,00

IPC2128LE-ADF28KM-G

EASYSTAR






I1012


**4K 8MP Mini Fixed Bullet Network Camera**
High quality image with 8MP, 1/2.7"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps; 4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Easystar technology ensures high image quality in low illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Smart IR, up to 50m (164ft) IR distance
Supports 256 G Micro SD card
IP67 protection
Support PoE power supply
3-Axis

162,00 135,00

IPC2128SB-ADF28KMC-I0

PRIME






I1090

**8MP Tri-Guard Fixed Dual-light Bullet Network Camera**
High quality image with 8MP, 1/2.7"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps; 4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Built-in Mic
Built-in Speaker
Smart IR, up to 30m (98ft) IR distance
Supports 512 G Micro SD card
IP67 protection

206,40 172,00

IPC2328SB-DZK-I0

PRIME






I1138

**8MP HD Intelligent LighterHunter IR VF (2.8 ~ 12mm) Bullet Network Camera**
High quality image with 8MP, 1/2.8"CMOS sensor
8MP (3840*2160)@20fps; 5MP (3072*1728)@30/25fps;
4MP (2560*1440)@30/25fps; 2MP (1920*1080) @30/25fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, include cross line, intrusion,
enter area, leave area detection
Based on target classification, smart intrusion prevention
significantly reduce false alarm caused by leaves,
Birds and lights etc., accurately focus on human and,
motor vehicle and non-motor vehicle
Intelligent People Flow Counting and Crowd Density Monitoring
LightHunter technology ensures ultra-high image
Quality in low illumination environment
120dB true WDR technology enables clear image in strong light scene
Support 9:16 Corridor Mode
Alarm:1 in/1 out, Audio: 1 in/1 out
Smart IR, up to 50m (164ft) IR distance
Supports 256 G Micro SD card
IK10 vandal resistant
IP67 protection
Support PoE power supply

240,00 200,00

IPC2328SB-ADZKM-DL-I1

NOVO






I1192


**8MP Dual-light Varifocal Bullet Network Camera**
High quality image with 8 MP, 1/2.7" CMOS sensor
8 MP (3840 × 2160)@25/24 fps; 5 MP (3072 × 1728)@30/25 fps; 4 MP (2560 × 1440)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
Ultra 265, H.265, H.264, MJPEG
Smart intrusion prevention, including cross line, intrusion, enter area, leave area detection
Intelligent intrusion prevention system based on target classification significantly reduces false alarms caused by leaves, birds, and lights, accurately focusing on humans, vehicles, and non-motor vehicles
Support ultra motion detection
Intelligent people flow counting and crowd density monitoring
120 dB true WDR technology enables clear image in strong light scene
Supports 9:16 corridor mode
Alarm I/O: 1/1, audio I/O: 1/1
MicroSD, up to 512 GB
IK10 vandal resistant and IP67 protection

312,00 260,00

## Uniarch

### Uho-S2







| | | | |
|---|---|---|---|
| I1091 | High quality image with 2MP, 1/3"CMOS sensor<br>2MP (1920*1080)@25/20fps; 720P (1280*720) @25/20fps<br>Ultra 265, H.265, H.264<br>Built-in Mic & Speaker, support two-way audio, offer better interaction<br>IR night vision, up to 10m (33ft) IR distance<br>Support 256 G Micro SD card<br>Wi-Fi connection and easy installation | 36,00 | 30,00 |

### Uho-S3E-M3






| | | | |
|---|---|---|---|
| I1051 | High quality image with 3MP, 1/3"CMOS sensor<br>3MP (2304*1296)@25/20fps; 2MP (1920*1080)@30/25fps;720P (1280*720) @30/25/fps<br>Ultra 265, H.265, H.264<br>Built-in Mic & Speaker, support two-way audio,offer better interaction<br>IR night vision, up to 10m (33ft) IR distance<br>Support 256 G Micro SD card<br>Wi-Fi connection and easy installation | 42,00 | 35,00 |

### IPC-B122-APF28






| | | | |
|---|---|---|---|
| I1140 | High quality image with 1080P, 1/2.9" CMOS sensor<br>1080P (1920 × 1080)@25/20 fps; 720P (1280 × 720)@25/20 fps<br>Ultra 265, H.265, H.264<br>2D/3D DNR (digital noise reduction)<br>ROI (region of interest) ensures image quality in areas of interest<br>With low bandwidth<br>Smart IR, up to 30 m (98.4 ft.) IR distance<br>Built-in mic<br>Wide temperature range: -30 ℃ to 60 ℃ (-22 °F to 140 °F)<br>DC 12 V, PoE (IEEE 802.3af) power supply | 43,20 | 36,00 |

### IPC-T122-APF28






| | | | |
|---|---|---|---|
| I1141 | High quality image with 1080P, 1/2.8" CMOS sensor<br>1080P (1920 × 1080)@25 fps; 720P (1280 × 720)@25 fps<br>Ultra 265, H.265, H.264<br>2D/3D DNR (digital noise reduction)<br>ROI (region of interest) ensures image quality in areas of<br>Interest with low bandwidth<br>Smart IR, up to 30 m (98.4 ft.) IR distance<br>Built-in mic<br>Wide temperature range: -30 ℃ to 60 ℃ (-22 °F to 140 °F)<br>DC 12 V, PoE (IEEE 802.3af) power supply | 43,20 | 36,00 |

### Uho-B1R-M2F3






| | | | |
|---|---|---|---|
| I1127 | High quality image with 2MP, 1/2.9"CMOS sensor<br>2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps<br>Ultra 265, H.265, H.264, MJPEG<br>Built-in Mic<br>Smart IR, up to 30m (98ft) IR distance<br>Supports 128 G Micro SD card<br>IP67 protection<br>3-Axis | 49,20 | 41,00 |

IPC-B125-APF28







| | | | |
|---|---|---|---|
| I1142 | High quality image with 5 MP, 1/3.0" CMOS sensor<br>5 MP (2592 × 1944)@20 fps; 4 MP (2560 × 1440)@20 fps; 3 MP<br>(2304 × 1296)@20 fps; 1080P (1920 × 1080)@30 fps; 720P<br>(1280 × 720)@30 fps; D1 (720 × 576)@30 fps<br>Ultra 265, H.265, H.264<br>2D/3D DNR (digital noise reduction)<br>ROI (region of interest) ensures image quality in areas<br>Of interest with low bandwidth<br>Smart IR, up to 30 m (98.4 ft.) IR distance<br>Built-in mic<br>Wide temperature range: -30 ℃ to 60 ℃ (-22 °F to 140 °F)<br>DC 12 V, PoE (IEEE 802.3af) power supply | 60,00 | 50,00 |

Uho-P1A-M3F4D






| | | | |
|---|---|---|---|
| I1052 | High quality image with 3MP, 1/2.8"CMOS sensor<br>2304*1296@20fps in the main stream<br>Ultra 265, H.265, H.264<br>Support digital WDR (Wide Dynamic Range)<br>Built-in Mic & Speaker, support two-way audio, offer better interaction<br>Support sound and light warning, makes warning and alarming<br>more noticeable<br>Smart IR, up to 30 m (98 ft) IR and 10m (33 ft) warm light distance,<br>Suitable for more scenes<br>Self-contained bracket, support two kinds of mounting<br>Supports 256 GB Micro SD card<br>Wi-Fi connection and easy installation<br>IP66 ingress protection<br>The front face is made of grapheme, which has better heat dissipation and more<br>Environmental protection | 66,00 | 55,00 |

Uho-P2S-M33F34







| | | | |
|---|---|---|---|
| I1128 | Fixed camera and PTZ camera integration, dual channels with one IP,<br>Look at overall situation and consider details at<br>the same time<br>Ultra 265, H.265, H.264<br>Support digital WDR (Wide Dynamic Range)<br>Built in Mic Speaker, support two way audio, offer better interaction<br>Support sound and light warning, makes warning and alarming<br>more noticeable<br>Smart IR, up to 30 m (98 ft) IR and 10m (33ft) warm light distance,<br>suitable for more scenes<br>IR warm light illumination to deal with different scenes and achieve<br>full color illumination<br>Supports 512 GB Micro SD card<br>Wi Fi connection and easy installation<br>IP66 ingress protection | 118,80 | 99,00 |

## PTZ IP KAMERE

IPC6312LR-AX4-VG






| | | | |
|---|---|---|---|
| I1073 | 2MP LightHunter IR Network PTZ Camera<br>High quality image with 2MP, 1/2.7"CMOS sensor<br>Ultra 265, H.265, H.264, MJPEG<br>Smart intrusion prevention, support false alarm filtering,<br>include Cross Line, Intrusion, Enter Area, Leave Area detection<br>People Counting, support people flow counting and crowd<br>density monitoring, suitable for different statistical scenarios<br>LightHunter technology ensures ultra-high image quality in<br>Low illumination environment<br>Up to 120 dB Optical WDR (Wide Dynamic Range)<br>Built-in Mic & Speaker<br>Smart IR, Up to 50 m (164 ft) IR distance<br>Micro SD, up to 256GB<br>IP66 protection<br>DC12V or PoE (IEEE 802.3af) power supply | 252,00 | 210,00 |

IPC675LFW-AX4DUPKC-VG






I1109

**5MP LightHunter Active Deterrence Mini PTZ Camera**
High quality image with 5MP, 1/2.7"CMOS sensor
Ultra 265, H.265, H.264, MJPEG
LightHunter technology ensures ultra-high image quality in low illumination environment
Up to 120 dB Optical WDR (Wide Dynamic Range)
Built-in Mic & Speaker
Smart IR, Up to 50 m (164 ft) IR distance and 10m (33 ft) warm light distance
Micro SD, up to 256GB
IP66 protection
DC12V or PoE (IEEE 802.3af) power supply

264,00 220,00

IPC6412LR-X5UPW-VG







I1157

**2MP 5X LightHunter Wi-Fi IR Network Mini PTZ Camera**
High quality image with 1080P, 1/2.7" CMOS sensor
1920 × 1080@30 fps in the main stream
Ultra 265, H.265, H.264, MJPEG
5X optical zoom allows for closer viewing of subjects
Smart intrusion prevention, supports false alarm filtering, including cross line, intrusion, enter area, leave area detection
automatic selection of best snapshots
LightHunter technology ensures ultra-high image quality in low illumination environment
Up to 120 dB optical WDR (wide dynamic range)
Wi-Fi connection and easy installation
Built-in mic and speaker, supports two-way audio
Alarm I/O: 1/1
Smart IR, up to 30 m (98.4 ft) IR distance

192,00 160,00

IPC6412LR-X16-VG







I1074

**2MP 16x LightHunter Network PTZ Dome Camera**
High quality image with 2MP,1/2.8" CMOS sensor
1920*1080@30fps in the main stream
Ultra 265, H.265, H.264, MJPEG
16X optical zoom allows for closer viewing of subjects
LightHunter technology ensures ultra-high image quality
In low illumination environment
Smart IR, up to 100m (328ft) IR distance
Micro SD, up to 256GB
DC 12V±25% or PoE+ (IEEE 802.3at)
IP66 ingress protection

360,00 300,00

IPC6424SR-X25--B






I1152

**4MP 25x LightHunter IR Network PTZ Camera**
High quality image with 4 MP, 1/2.8" CMOS sensor
2688 × 1520@30 fps in the main stream
Ultra 265, H.265, H.264, MJPEG
25X optical zoom
Smart intrusion prevention, supports false alarm filtering, including cross line, intrusion, enter area, leave area detection
automatic selection of best snapshots, supports face detection masked area
People counting, supports people flow counting and crowd density monitoring, suitable for different statistical scenarios
LightHunter technology ensures ultra-high image quality
In low illumination environment
Smart IR, up to 100 m (328 ft) IR distance
DC 12 V±25%, PoE+ (IEEE 802.3at)
Alarm I/O: 2/1, audio I/O: 1/1
IP67 ingress protection
IK10 vandal resistant

NEMA NA STANJU

IPC6634S-X33-VF



I1153

**4MP 33X LightHunter IR Network PTZ Camera**
High quality image with 4 MP, 1/2.8" CMOS sensor
2688 × 1520@30 fps in the main stream
Ultra 265, H.265, H.264, MJPEG
33X optical zoom
Smart intrusion prevention, supports false alarm filtering,
including cross line, intrusion, enter area, leave area detection
automatic selection of best snapshots, supports face detection masked area
People counting, supports people flow counting and crowd density monitoring,
Suitable for different statistical scenarios
LightHunter technology ensures ultra-high image quality in low illumination environment
AC 24 V±25%, DC 24 V±25%, PoE+ (IEEE802.3 at)
Alarm I/O: 7/2, audio I/O: 1/1
IP67 ingress protection
IK10 vandal resistant

1200,00 1000,00

## VIDEO INTERFONI

OEU-201B-HMK-W



I1201

Outdoor Station
Front panel: Plastic cement
Supports batch configuration
Supports intercom calls to associated indoor units or APPs
Support monitoring function, security alarm, tamper alarm
Support Wi-Fi
Built-in IC card reader
Card Capacity 2000
IP65(Apply silica gel to gaps between the device and the wall)

216,00 180,00

OEU-202S-HMK2



I1202

Outdoor Station
Front panel: Metal
Vandal-resistant: IK08
Supports batch configuration
WDR: Digital
Built-in IC card reader
Card Capacity 10000
IP65(Apply silica gel to gaps between the device and the wall)

252,00 210,00

OEU-202S-HMK4



I1204

Outdoor Station
Front panel: Metal
Vandal-resistant: IK08
Supports batch configuration
WDR: Digital
Built-in IC card reader
Card Capacity 10000
IP65(Apply silica gel to gaps between the device and the wall)

276,00 230,00

OEU-301S-HMKA



I1301

Outdoor Station
Front panel: Metal
Vandal-resistant: IK08
Supports batch configuration
WDR: Digital
Built-in IC card reader
Card Capacity 10000
Alarm Output: 2
IP65(Apply silica gel to gaps between the device and the wall)

420,00 350,00

EP-CS201



| | | | |
|---|---|---|---|
| I1203 | Wall Mount Sunshield<br>Compatible with OEU-201B-HMK-W, OEU-201B-HMK-W-NB, OEU-201S-HMK-W,<br>And OEU-201S-HMK-W-NB villa door stations | 18,00 | 15,00 |

OEI-372S-H-W



| | | | |
|---|---|---|---|
| I1372 | Indoor Station<br>Rugged ABS casing and glass panel.<br>1024*600 HD touch screen.<br>Batch configuration transfer.<br>Remote opening of linked door stations, one-key opening.<br>Network camera monitoring, security alarm | 192,00 | 160,00 |

KIT/201S/372S/NSW2020



| | | | |
|---|---|---|---|
| I1205 | OEU-201S-HMK-W<br>Metal casing.<br>Supports call and intercom with the connected indoor station and app.<br>Supports security protection alarm and tamper alarm triggered by door magnet, infrared, etc.<br>Supports Wi-Fi.<br>Built-in IC card reader.<br><br>OEI-372S-H-W<br>ABS casing and glass panel, solid and durable.<br>Supports Wi-Fi.<br>Supports touchscreen operation.<br>1024 x 600 HD screen.<br>Supports remote door opening by sending signal to the door station.<br>Allows to view live video of connected door stations and network cameras.<br><br>NSW2020-6T-POE-IN<br>Allows to switch operating modes, including Default, VLAN, and Extend.<br>Supports VLAN isolation. All PoE ports are isolated from each other and only able to communicate with uplink ports.<br>Supports network extension. With a high-quality network cable and IPC, the network transmission distance can reach up to 250 meters by lowering the network port rate to 10Mbps.<br>Supports port priority. Packets from high-priority ports will be forwarded first.<br>Supports flow control. When there is data congestion in the uplink ports, the switch will actively send flow control frames to PoE ports.<br>Plug-and-play, simple and convenient.<br>All metal casing, secure and reliable. | 360,00 | 300,00 |

## HARD DISKOVI

WD GREEN 320 GB



| | | |
|---|---|---|
| Western Digital, 320GB GREEN, 7200RPM, SATA III, 32MB | KONTAKT | |

WD GREEN 500 GB



| | | |
|---|---|---|
| Western Digital,500GB GREEN, 7200RPM, SATA III, 32MB | KONTAKT | |

WD GREEN 1 TB



| | | |
|---|---|---|
| Western Digital, 1 TB GREEN, 7200RPM, SATA III, 32MB | KONTAKT | |

HDD 1TB WD11PURZ-85C5HY0



| | | | | |
|---|---|---|---|---|
| I1100 | Western Digital, 1TB Purple, IntelliPower, SATA III, 64MB | 160,80 | 134,00 |

HDD 2TB WD23PURZ-85C5HY0



| | | | | |
|---|---|---|---|---|
| I1200 | Western Digital, 2TB Purple, IntelliPower, SATA III, 64MB | 198,00 | 165,00 |

HDD 4TB WD44PURZ-85CPDY0



| | | | | |
|---|---|---|---|---|
| I1400 | Western Digital, 4TB Purple, IntelliPower, SATA III, 64MB | 283,80 | 236,50 |

HDD 6TB WD64PURZ-74BWUY0



| | | | | |
|---|---|---|---|---|
| I1600 | Western Digital, 6TB Purple, IntelliPower, SATA III, 64MB | 434,40 | 362,00 |

HDD 8TB WD64PURZ-85BWUY0



| | | | | |
|---|---|---|---|---|
| 6250 | Western Digital, 8TB Purple, IntelliPower, SATA III, 5400RPM, 256MB | 594,00 | 495,00 |

TF-64G-T-L



| | | | | |
|---|---|---|---|---|
| I1021 | Uniview memorijska kartica<br>Kapacitet: 64GB<br>Maksimalna brzina čitanja: 90MB/s<br>Maksimalna brzina pisanja: 65MB/s<br>Dimenzije: 11mm x 15mm x 1mm<br>Težina: 0,33g | 27,60 | 23,00 |

TF-128G-T-L



| | | | | |
|---|---|---|---|---|
| I1022 | Uniview memorijska kartica<br>Kapacitet: 128GB<br>Maksimalna brzina čitanja: 100MB/s<br>Maksimalna brzina pisanja: 80MB/s<br>Dimenzije: 11mm x 15mm x 1mm<br>Težina: 0,33g | 45,60 | 38,00 |

TF-256G-T-L



| | | | | |
|---|---|---|---|---|
| I1123 | Uniview memorijska kartica<br>Kapacitet: 256GB<br>Maksimalna brzina čitanja: 90MB/s<br>Maksimalna brzina pisanja: 65MB/s<br>Dimenzije: 11mm x 15mm x 1mm<br>Težina: 0,33g | 108,00 | 90,00 |

## Uniview SVIČEVI

NSW1010-5T-IN



| | | | | |
|---|---|---|---|---|
| I1130 | 5-Port 100 Megabit Plastic Shell Switch<br>Supports IEEE802.3 and IEEE802.3u standards.<br>Supports 10/100Mbps or 10/100/1000Mbps self-adaptive Ethernet port.<br>Supports auto MDI/MDIX.<br>Supports IEEE802.3 flow control for full-duplex mode and backpressure<br>For half-duplex mode. | 8,40 | 7,00 |

NSW1010-8T-IN



I1131

8-Port 100 Megabit Plastic Shell Switch
Supports IEEE802.3 and IEEE802.3u standards.
Supports 10/100Mbps or 10/100/1000Mbps self-adaptive Ethernet port.
Supports auto MDI/MDIX.
Supports IEEE802.3 flow control for full-duplex mode and backpressure
For half-duplex mode.

12,00 10,00

NSW1010-5GT-IN



I1132

5-Port GIgabit Plastic Shell Switch
Supports IEEE802.3 and IEEE802.3u standards.
Supports 10/100Mbps or 10/100/1000Mbps self-adaptive Ethernet port.
Supports auto MDI/MDIX.
Supports IEEE802.3 flow control for full-duplex mode and backpressure
For half-duplex mode

14,40 12,00

NSW1010-8GT-IN



I1133

8-Port Gigabit Plastic Shell Switch
Supports IEEE802.3 and IEEE802.3u standards.
Supports 10/100Mbps or 10/100/1000Mbps self-adaptive Ethernet port.
Supports auto MDI/MDIX.
Supports IEEE802.3 flow control for full-duplex mode and backpressure
For half-duplex mode.

24,00 20,00

NSW3000-25GT1GP1GC-IN






I1190

Gigabit Cloud Management Switch
Ports Type:
24 x 10/100/1000Mbps port (RJ45)
1 x 10/100/1000Mbps port (RJ45)
1 x Gigabit SFP
1 x Gigabit Combo
Supports unified configuration, management, and search on the software, convenient for rapid operation and maintenance of multiple devices; supports automatically discovering the connected video devices and generating a network topology on the software.
Supports Web login, and device configuration and management on the Web interface;
Supports visiting the cloud by scanning the QR code. Allows to view the device status and network topology in real time on the app.
Supports the extend mode for up to 250m communication range and 10Mbps auto-negotiation rate.
Allows to report port abnormal alarms to the software for realtime monitoring.
Supports port priority. The packets received by the priority port will be forwarded first when the switch is fully loaded.
All metal casing, secure and reliable.

192,00 160,00

## Uniview POE SVIČEVI

**NSW2020-6T-POE-IN**



I1023

6×100Mbps network ports (RJ45), od toga 4 PoE porta Podržava:
IEEE802.3,IEEE802.3u, IEEE802.3az,IEEE802.3x,IEEE802.3af,IEEE802.3at
Modovi rada: Default(Normal mode):
Svi portovi komuniciraju normalno međusobno EXTEND(Surveillance mode):
Distanca prenosa do 250 metara uz brzinu 10Mb/s. 6kV zaštita od prenapona
PoE Budžet: 60W Maksimalna snaga porta: 30W Dimenzije: 108mm x 100mm x 25.5mm

54,00 45,00

**NSW2100-6GT-POE-IN**






I1188

4 Port Gigabits PoE Switch
Ports Type: 4x 10/100/1000Mbps PoE port (RJ45)
2 x 10/100/1000Mbps port (RJ45)
Supports Web login, and device configuration and management on the Web interface.
Supports visiting the cloud by scanning the QR code. Allows to view the device status in real time on the app, and remotely restart the PoE power supply.
Supports PoE power supply ; allows to enable or disable PoE power supply for the powered device; allows up to 250m power supply using a standard network cable.
Supports the extend mode for up to 250m communication range and 10Mbps auto-negotiation rate.
Supports port priority. The priority port will be powered first when the PoE power supply is full.
All metal casing, secure and reliable.
Max capacity:65W
Maximum PoE power for single port: 30W

60,00 50,00

**NSW2010-5GT-POE-IN**



I1059

4 Port GigabitPoE Switch
1 Port Gigabit Uplink
PoE Power up to 30W Each Port
Supports IEEE802.3 at Standard, compatible with IEEE802.3af by electrical equipment (PD)
Auto Detect Power Device
Power Port Supply prioritization, guarantees the continuous power supply of key nodes
IEEE802.3 X full duplex flow control and Backpressure half duplex flow control
Line Speed Forwarding, intelligent identification
Up to 250m transmission distance on surveillance mode

78,00 | 65,00

---

**NSW2020-10T-POE-IN**



I1024

10×100Mbps network ports (RJ45), od toga 8 PoE porta Podržava: IEEE802.3,IEEE802.3u,
IEEE802.3az,IEEE802.3x,IEEE802.3af,IEEE802.3at Modovi rada: Default(Normal mode):
Svi portovi komuniciraju normalno međusobno EXTEND(Surveillance mode):
Distanca prenosa do 250 metara uz brzinu 10Mb/s. VLAN(Secure mode):
8 Downlink portova mogu komunicirati samo sa uplink portovima. 6kV zaštita od prenapona
PoE Budžet: 88W Maksimalna snaga porta: 30W Dimenzije: 171mm x 101mm x 25.5mm

90,00 | 75,00

---

**NSW2100-9GT1GP-LPOE-IN**

NOVO



I1179

8 Port Gigabits PoE Switch
Ports Type:
8x 10/100/1000Mbps PoE port (RJ45)
1 x 10/100/1000Mbps port (RJ45)
1 x Gigabit SFP
Supports Web login, and device configuration and management on the Web interface.
Supports visiting the cloud by scanning the QR code.
Allows to view the device status in real time on the app,
and remotely restart the PoE power supply.
Supports PoE power supply ; allows to enable or disable
PoE power supply for the powered device; allows up to
250m power supply using a standard network cable.
Supports the extend mode for up to 250m
communication range and 10Mbps auto-negotiation rate.
Supports port priority. The priority port will be powered first when the
PoE power supply is full.
All metal casing, secure and reliable.

96,00 | 80,00

---

**NSW3000-8T2GT-POE-IN**



I1134

Cloud Managed Ethernet Switch(PoE)
8 x 10/100Mbps POE port (RJ45) ,2 x Gigabit port (RJ45)
Supports unified configuration, management, and search on the software,
convenient for rapid operation and maintenance of multiple devices;
supports automatically discovering the connected video devices and
generating a network topology on the software.
Supports Web login, and device configuration and management on the
Web interface; supports visiting the cloud by scanning the QR code.
Allows to view the device status and network topology in real time on the app,
and remotely restart the PoE power supply.
Allows up to 250m power supply using a standard network cable.
Supports the extend mode for up to 250m communication range and
10Mbps auto-negotiation rate.
Allows to report port abnormal alarms to the software for realtime monitoring.
Supports port priority. The packets received by the priority port will be forwarded first when the switch
is fully loaded and the priority port will be powered first when the PoE power supply is full.
All metal casing, secure and reliable.
Maximum total power: 120W
Maximum PoE power for single port: 30W

96,00 | 80,00

---

**NSW2020-16T2GC-POE-IN**



I1067

16×100Mbps network ports (RJ45), 2x1000Mbps
uplink porta (RJ45), 2x1000Mbps SFP porta,
od toga 16x PoE porta
Podržava: IEEE802.3,IEEE802.3u,IEEE802.3az,
IEEE802.3x,IEEE802.3af,IEEE802.3at
Modovi rada: Default(Normal mode):
Svi portovi komuniciraju normalno međusobno
EXTEND(Surveillance mode): Distanca prenosa do
250 metara uz brzinu 10Mb/s.
VLAN(Secure mode): 16 x Downlink portova mogu
komunicirati samo sa uplink portovima.
6kV zaštita od prenapona PoE Budžet: 370W
Maksimalna snaga: 250W
Maksimalna PoE snaga porta: 30W
Dimenzije: 440mm x 207mm x 45mm
Moguća rek montaža 19'' , dolazi uz switch

216,00 | 180,00

NSW3000-16T1GT1GC-LPOE-IN



I1135

**Cloud Management Switch**
16 x 10/100Mbps POE port (RJ45) + 1 x Gigabit port (RJ45)+ 1 x Gigabit Combo
Supports unified configuration, management,
and search on the software, convenient for rapid
operation and maintenance of multiple devices;
supports automatically discovering the connected
video devices and generating a network topology on the software.
Supports Web login, and device configuration and
management on the Web interface
in real time on the app, and remotely restart the PoE power supply.
Supports PoE power supply and allows to view the power;
allows to enable or disable PoE power supply for the powered device;
Allows up to 250m power supply using a standard network cable.
Supports the extend mode for up to 250m communication range and
10Mbps auto-negotiation rate.
Allows to report port abnormal alarms to the software for realtime monitoring.
Supports port priority. The packets received by the priority port will be forwarded first when the switch is fully loaded and the priority port will be powered first when the PoE power supply is full.
All metal casing, secure and reliable.
Maximum total power: 150W
Maximum PoE power for single port: 30W

**180,00** **150,00**

NSW2020-24T1GT1GC-POE-IN



I1163

**Unmanaged Ethernet Switch(PoE)**
24×100Mbps PoE ports (RJ45) + 1×1000Mbps Gigaethernet ports +1×1000Mbps Combo ports
Multiple working modes to address your business needs: Default(Normal mode), VLAN(Secure mode), EXTEND(Surveillance mode)
Support port traffic control
Support for secure mode, all downlink ports can communicate only with uplink ports
Up to 250m transmission distance on surveillance mode
Support buffer optimization
All metal housing, safe and reliable
Max capacity:370W
Max capacity for single port: 30W

**232,20** **193,50**

NSW2010-24T2GC-PoE-IN



I1136

**Ethernet Switch(PoE)**
24×100Mbps PoE ports (RJ45)+2×1000Mbps Combo ports
Multiple working modes to address your business needs:
Default(Normal mode), VLAN(Secure mode), EXTEND(Surveillance mode)
Support port traffic control
Support for secure mode, all downlink ports can communicate
Only with uplink ports
Up to 250m transmission distance on surveillance mode
Support buffer optimization
All metal housing, safe and reliable
Max power: 390W

**252,00** **210,00**

NSW3000-25GT1GP1GC-LPOE-IN

NOVO



I1191

**Gigabit Cloud Management PoE Switch**
Ports Type:
24 x 10/100/1000Mbps PoE port (RJ45)
1 x 10/100/1000Mbps port (RJ45)
1 x Gigabit SFP
1 x Gigabit Combo
Supports unified configuration, management, and search on the software, convenient for rapid operation and maintenance of multiple devices; supports automatically discovering the connected video devices and generating a network topology on the software.
Supports Web login, and device configuration and management on the Web interface;
Supports visiting the cloud by scanning the QR code. Allows to view the device status and network topology in real time on the app, and remotely restart the PoE power supply.
Supports PoE power supply and allows to view the power; allows to enable or disable PoE power supply for the powered device; allows up to 250m power supply using a standard network cable.
Supports the extend mode for up to 250m communication range and 10Mbps auto-negotiation rate.
Allows to report port abnormal alarms to the software for realtime monitoring.
Supports port priority. The packets received by the priority port will be forwarded first when the switch is fully loaded and the priority port will be powered first when the PoE power supply is full.
All metal casing, secure and reliable.

**300,00** **250,00**

## MONITORI

MW3224-V



| | | | |
|---|---|---|---|
| I1164 | UNV 24" LED Monitor<br>Resolution 1920 × 1080<br>Color Support: 16.7 M<br>Refresh Rate: 60 Hz<br>Operation Hour: 24/7 | 120,00 | 100,00 |

## DODATNA OPREMA

GCB01-B7



| | | | |
|---|---|---|---|
| I1101 | UNV-Link Pro Connect Box<br>Network: 4 x RJ45 10M/100M Base-TX EthernetNetwork<br>Port 1 Support POE (IEEE802.3af) OutputNetwork Port 4<br>Support PSE Voltage Test<br>Wi-Fi 2.4G Wi-Fi<br>Battery: 7500mAH<br>Power Input: 1 x DC 5V/2A max, type-c<br>Power Output: 1 x DC 12V/1A output; 1 x DC 5V/1A output, type-A | 78,00 | 65,00 |


PoE Extender



| | | | |
|---|---|---|---|
| 2317 | Model: ZX-14AF-S (HORACO)<br>PoE Input Port (Uplink): 1x 10/100Mbps RJ45<br>PoE Output Ports: 4x 10/100Mbps RJ45<br>PoE Protocol: IEEE 802.3af / IEEE 802.3at<br>Power Capacity: Supports up to 60W Total Input / Max 30W Output per port<br>Transmission Distance: 100 meters (Standard) / Up to 250 meters (Extend Mode) | 30,00 | 25,00 |


## KABLOVI

UNV Cat6 (UTP), CCA





| | | | |
|---|---|---|---|
| i1044 | **CAB-LC3100B-CCA-IN**<br>**Conductor material: CCA(Copper content: 27%)**<br>**Insulation material: HDPE**<br>**Packing length: 305±1 m**<br>**Sheath material: PVC** | **0,30** | **0,250** |

UNV Cat5e (UTP), BC




| | | | |
|---|---|---|---|
| i1045 | **CAB-LC2100A-E2-ECA-IN**<br>**Conductor material: OFC (Oxygen free copper)**<br>**Insulation material:HDPE**<br>**Packing length: 305±1 m**<br>**Sheath material: PVC (complies RoHS/REACH)** | **0,54** | **0,45** |

UNV Cat6 (UTP), BC




| | | | |
|---|---|---|---|
| i1046 | **CAB-LC3100A-EC-ECA-IN**<br>**Conductor material: OFC (Oxygen free copper)**<br>**Insulation material: HDPE**<br>**Packing length: 305±1 m**<br>**Sheath material: PVC (complies RoHS/REACH)** | **0,78** | **0,65** |

CAB-LC3110B-E-IN




| | | | |
|---|---|---|---|
| I1186 | Cat6 305m Outdoor UTP Network Cable (OFC 0.5mm Black)<br>Packing length: 305±1m<br>Material: Solid-Bare Copper<br>Insulation material: HDPE<br>Sheath material(IN Jacket): PVC(complies RoHS/REACH)<br>Sheath material (OUT Jacket): LDPE<br>Color: Black | 0,84 | 0,70 |


## KUĆIŠTA I NOSAČI

DOZNA ZA KAMERE BA-01



| | | | |
|---|---|---|---|
| 5633 | Razvodna kutija za spoljašnu montažu kamere, 131x131x51 mm; Pogodna za direktnu montažu kamere na kutiju i smeštanje konekotra za povezivanje. | 3,60 | 3,00 |

DOZNA ZA KAMERE G153



| | | | |
|---|---|---|---|
| 8644 | Razvodna kutija za spoljašnu montažu kamere, 115x115x55 mm; Pogodna za direktnu montažu kamere na kutiju i smeštanje konekotra za povezivanje. | 3,20 | 2,67 |

DOZNA ZA KAMERE BA-02



| | | | |
|---|---|---|---|
| 8645 | Razvodna kutija za unutrašnju montažu kamere, 120/50mm; Pogodna za direktnu montažu kamere na kutiju i smeštanje konekotra za povezivanje. | 3,20 | 2,67 |

TR-JB05-B-IN



| | | | |
|---|---|---|---|
| I1062 | Nosač za Dome kamere serije IPC21XX<br>Dimenzije: Φ104.4mm*54.5mm<br>Težina: 0.36kg<br>Materijal: Aluminijum | 19,20 | 16,00 |

TR-JB05-A-IN



| | | | |
|---|---|---|---|
| I1061 | Nosač za kamere<br>Dimenzije: Φ93 × 93 × 39mm<br>Težina: 0.2kg<br>Materijal: Aluminijum | 15,60 | 13,00 |

TR-JB03-G-IN



| | | | |
|---|---|---|---|
| I1064 | Nosač za Dome kamere serije IPC32x i IPC31x<br>Dimenzije: φ106.6mm*36mm<br>Težina: 0.2kg<br>Materijal: Aluminijum | 13,20 | 11,00 |

TR-JB03-I-IN



| | | | |
|---|---|---|---|
| I1063 | Nosač za Dome kamere serije IPC36XXL i IPCT1XX<br>Dimenzije: Ø117.8 × 36mm<br>Težina: 0.2kg<br>Materijal: Aluminijum | 15,60 | 13,00 |

TR-JB03-H-IN



| | | | |
|---|---|---|---|
| I1171 | Nosač za Dome kamere serije IPC363X, IPC36XXS/E i 4MP fisheye<br>Dimenzije: Φ126mm*36mm (4.96" x1.42")<br>Težina: 0.24kg<br>Materijal: Aluminijum legura | 14,40 | 12,00 |

TR-JB04-C-IN



| | | | |
|---|---|---|---|
| I1172 | Nosač za Dome kamere serije 323<br>Dimenzije: **Φ**144.8 mm × 42.5 mm (5.7" × 1.7")<br>Težina: 0.3kg<br>Materijal: Aluminijum legura | 15,60 | 13,00 |

TR-JB07-D-IN



| | | | |
|---|---|---|---|
| I1170 | Bullet Junction Box(Support wiring from behind) | 27,60 | 23,00 |

TR-JB07/WM03-G-IN



| | | | |
|---|---|---|---|
| I1165 | Wall Mounting Assembling Bracket For 32 Fix-dome<br>&Mini Fix-dome&Plastic Turret Camera | 36,00 | 30,00 |

TR-WM07P-B

NOVO



| | | | |
|---|---|---|---|
| I1181 | Dome Wall Mounting Plastic Bracket<br>Application: IPC32X Series, IPC361XX Series (Plastic)<br>Bracket Weight: 0,10kg | 7,20 | 6,00 |

UNV TR-UP06-C-IN-V2

NOVO



| | | | |
|---|---|---|---|
| I1169 | Pole Mounting Bracket for Bullet Junction Box Only<br>Application: Outdoor, pole or rail installation for<br>Bullet camera of IPC23XX OEM IPC23XX/22X、IPC74X and IPC252/26X series<br>Bracket Dimensions: 136.0 mm × 127.0 mm × 63.6 mm (5.4" × 5.0" × 2.5")<br>Bracket Weight: 0.34kg<br>Bracket Material: Aluminum alloy | 14,40 | 12,00 |

## KONEKTORI

BNC NA LEMLJENJE
SA ŠRAFOM



| | | | |
|---|---|---|---|
| 3299 | BNC konektor muški sa šrafom.<br>Pakovanje 100 kom. | 0,54 | 0,45 |

BNC NA LEMLJENJE



| | | | |
|---|---|---|---|
| 2560 | BNC konektor muški na lemljenje.<br>Pakovanje 100 kom. | 0,54 | 0,45 |

BNC KONEKTOR



| | | | |
|---|---|---|---|
| 30020 | BNC konektor muški na šraf. | 0,50 | 0,42 |

| | | | | |
|---|---|---|---|---|
| BNC NA KRIMP RG59 | | | | |
|  | 2534 | BNC konektor za RG59 kabl na krimp.<br>Pakovanje 100 kom. | 0,60 | 0,50 |
| BNC MUŠKI- F ŽENSKI | | | | |
|  | 1795 | BNC konektor muški F ženski.<br>Pakovanje 100 kom. | 0,70 | 0,58 |
| BNC NASTAVAK | | | | |
|  | 4447 | BNC konektor. Nastavak ženski-ženski.<br>Pakovanje 100 kom. | 0,54 | 0,45 |
| F KONEKTOR na krimp RG6 | | | | |
|  | 2559 | F konektor za RG6 kabl.<br>Pakovanje 100 kom. | 0,14 | 0,12 |
| F KONEKTOR na krimp RG59 | | | | |
|  | 1796 | F konektor za RG59 kabl.<br>Pakovanje 100 kom. | 0,14 | 0,12 |
| RF METALNI G MUŠKI | | | | |
|  | 4448 | RF metalni G muški (UGAONI) konektor<br>Pakovanje 100 kom. | 0,35 | 0,29 |
| RCA MUŠKI-F ŽENSKI | | | | |
|  | 4446 | RCA muški - F ženski konektor<br>Pakovanje 100 kom. | 0,53 | 0,44 |
| F NASTAVAK | | | | |
|  | 3300 | F nastavak Ženski - Ženski<br>Pakovanje 100 kom | 0,22 | 0,18 |
| F KONEKTOR KOMPRESIONI RG6 XL | | | | |
|  | 1625 | Profesionalni PPC F konektor za RG6 kabl.<br>Pakovanje 50 kom. | 0,44 | 0,37 |
| F KONEKTOR KOMPRESIONI RG11 XL | | | | |
|  | 1627 | Profesionalni PPC F konektor za RG11 kabl. | 2,96 | 2,47 |
| F KONEKTOR KOMPRESIONI RG59 XL | | | | |
|  | 1624 | Profesionalni PPC F konektor za RG59 kabl.<br>Pakovanje 50 kom. | 0,47 | 0,39 |
| DC KABL-MUŠKI | | | | |
|  | 1387 | DC utikač-muški | 0,47 | 0,39 |
| DC KABL-ŽENSKI | | | | |
|  | 1391 | DC utikač-ženski | 0,47 | 0,39 |

DC KONEKTOR MUŠKI



| | | | |
|---|---|---|---|
| 3425 | DC konektor Muški | 0,37 | 0,31 |

DC KONEKTOR ŽENSKI



| | | | |
|---|---|---|---|
| 4197 | DC konektor ženski. | 0,38 | 0,32 |

DC RAZDELNIK 1-4



| | | | |
|---|---|---|---|
| 1388 | 1 DC utičnica - 4 DC utikača | 1,99 | 1,66 |

DC RAZDELNIK 1-8



| | | | |
|---|---|---|---|
| 1389 | 1 DC utičnica - 8 DC utikača | 3,97 | 3,31 |

CAT7 RJ45



| | | | |
|---|---|---|---|
| | Mrežni konektor RJ45 kategorija 7 | 0,50 | 0,42 |

CAT6 UNV RJ45 GC-RJ6-IN




| | | | |
|---|---|---|---|
| I1182 | Cat6 Unshielded Crystal Head<br>3µ inches gold-plated for excellent contact performance<br>Stable data transmission with up to 750 plugs and unplugs<br>Highly transparent PC material support RoHS standards,<br>Wear-resistant and durable<br>8 pins × 8 conductors, support 1000Bas-T Ethernet | 0,12 | 0,10 |

CAT5 UNV GC-RJ5e-IN




| | | | |
|---|---|---|---|
| i1183 | Cat5e Unshielded Crystal Head<br>3µ inches gold-plated for excellent contact performance<br>Stable data transmission with up to 750 plugs and unplugs<br>Highly transparent PC material support RoHS standards, wear-resistant and durable<br>8 pins × 8 conductors, support 1000Base-T Ethernet | 0,10 | 0,08 |

CAT5 RJ45



| | | | |
|---|---|---|---|
| 0067 | Mrežni konektor RJ45 | 0,05 | 0,04 |

Telefonski konektor RJ11



| | | | |
|---|---|---|---|
| 0066 | Telefonski konektor RJ11 | 0,02 | 0,02 |

## DODATNA OPREMA

ŠTAMPAČ P-TOUCH E100



| | | | |
|---|---|---|---|
| 4663 | Širina TZ trake: 6, 9 i 12mm ABC Tastatura LCD displej sa 16 karaktera u jednoj liniji Ispis u najviše 2 linije Najveća visina slova za štampanje: 9mm Brzina štampe: 20mm/s Rezolucija štampe: 180 dpi Serijsko numerisanje 1-9 Podešavanje dužine etikete 30-300mm 9 različitih vrsta fontova, veličine 15 Horizontalni ili vertikalni ispis Manuali sekač Napajanje: 6 AAA baterija *dolazi u kompletu sa praktičnim koferom, trakom za ruku, jednom TZe trakom kao uzorkom i uputstvom za upotrebu | 106,56 | 88,80 |

| | | | | |
|---|---|---|---|---|
| MIKROFON LY-501C<br> | 2584 | Audio modul sa izvedenim konektorima.<br>Napajanje 12 V DC | 3,97 | 3,31 |
| MIKROFON LY-502B<br> | 2583 | Audio modul plastični sa trimerom.<br>Napajanje 12 V DC | 6,00 | 5,00 |
| MIKROFON LY-506<br> | 1937 | Audio modul metalni sa trimerom.<br>Napajanje 12 V DC | 10,00 | 8,33 |
| DS-2FP2020<br> | 5222 | Viisoko osetljivi omnidirekcioni mikrofon. Osetljivost -34 dB. Prenos zvuka do 3.000 metara. SNR: 60dB. Nivo signala 2Vpp, 12Vdc. Dimenzije 78 x 28mm. Napajanje 12 VDC (9 V to 15 V). | 36,00 | 30,00 |
| DH-PFM800-4K (par)<br> | 3632 | One (1) Channel Balun<br>Real-time Transmission over UTP CAT5E/6 Cable<br>Compatible with HDCVI, TVI, AHD, and CVBS Video Formats<br>Transmission Distance at 4K: 200 m (656 ft)<br>External Power Supply not Required | 7,80 | 6,50 |
| OG razvodna kutija 100x100<br> | 00091 | Razvodna kutija 100x100 | 1,80 | 1,50 |
| OG razvodna kutija<br>80x80<br> | 00092 | Razvodna kutija 80x80 | 1,10 | 0,92 |
| OG razvodna kutija 160x100x74<br> | 00093 | Razvodna kutija 160x100x74 | 3,00 | 2,50 |
| OG razvodna kutija 160x100x48<br> | 00094 | Razvodna kutija 160x100x48 | 2,64 | 2,20 |
| ALAT ZA KRIMP<br>RG6, RG11,RG59<br> | 3302 | Alat za krimpovanje RG6, RG11,RG59 konektora | 48,00 | 40,00 |
| STRIPER ZA KABLOVE RG59,RG6<br> | 3301 | Alat za stripovanje RG59,RG6 kablova | 20,40 | 17,00 |
| ALAT KOMPRESIONI<br>ZA RG59, RG6<br> | 1629 | Profesionalni PPC alat za kompresovanje kompresionih F konektora RG59,RG6 XL oznake. | 37,92 | 31,60 |

| | | | | |
|---|---|---|---|---|
| ALAT KOMPRESIONI, ZA RG6,RG11,RG59  | 3796 | Profesionalni PPC alat za kompresovanje kompresionih F konektora RG6,RG11,RG59 XL oznake. | 54,34 | 45,28 |
| KLEŠTA ZA KRIMPOVANJE KOMPLET  | 5790 | Komplet sadrži: - LAN Tester RJ11, 12 i 45 - LSA Punch Down Tool sa sečicom za kabl - Alat za krimpovanje RJ11, 12 i 45 - Alat za sečenje i skidanje izolacije - Torbica Ne sadrži bateriju za Network Tester (9V block cell) | 28,68 | 23,90 |

## NAPAJANJA

| | | | | |
|---|---|---|---|---|
| XED-1212S  | 1633 | Ulaz: 90V-264V<br>Izlaz: 12V , 1A<br>Snaga: 12W<br>Dimenzije: 74 (D) x 46 (Š) x 30 (V) mm<br>Dužina izlaznog kabla: 110cm, 10.5x5,5x2mm konektor | 5,70 | 4,75 |
| XED-2012S  | 1382 | Ulaz: 90V-264V<br>Izlaz: 12V , 2A<br>Snaga: 24W<br>Dimenzije: 98 (D) x 52 (Š) x 35 (V) mm<br>Dužina izlaznog kabla: 110cm, 10.5x5,5x2mm konektor | 7,68 | 6,40 |
| XED-3013S  | 1383 | Ulaz: 90V-264V<br>Izlaz: 12V , 3A<br>Snaga: 36W<br>Dimenzije: 98 (D) x 52 (Š) x 35 (V) mm<br>Dužina izlaznog kabla: 110cm, 10.5x5,5x2mm konektor | 12,00 | 10,00 |
| XED-5013S  | 1384 | Ulaz: 100V-240V<br>Izlaz: 12V , 5A<br>Snaga: 60W<br>Dimenzije: 126 (D) x 57 (Š) x 32 (V) mm<br>Dužina izlaznog kabla: 110cm, 10.5x5,5x2mm konektor | 16,20 | 13,50 |
| XED-6013B  | 3509 | Ulaz: 100V-240V<br>Izlaz: 12V , 6A<br>Snaga: 72W<br>Dimenzije: 126 (D) x 57 (Š) x 32 (V) mm<br>Dužina izlaznog kabla: 110cm, 10.5x5,5x2mm konektor | 20,40 | 17,00 |
| 9-KANALNO NAPAJANJE XED-10A12VX-9L  | 5435 | Snaga: 120W<br>Ulaz: 100~240V 50~60Hz<br>Izlaz: 12V 10A 9 kanala<br>Dimenzije: 237*213*70mm<br>Neto težina: 1800g<br>Napomena: Sadrži AC kabl | 82,80 | 69,00 |
| 18-KANALNO NAPAJANJE XED-15A12VX-18L  | 5114 | Snaga: 180W<br>Ulaz: 100~240V 50~60Hz<br>Izlaz: 12V 15A 18 kanala<br>Dimenzije: 240*218*70mm<br>Neto težina: 2300g<br>Napomena: Sadrži AC kabl | 94,80 | 79,00 |

Sve cene su iskazane u EUR sa obračunatim PDV-om, podložne su promenama i zavisne od odnosa DIN/EUR/USD. Plaćanje se vrši u dinarima po važećem prodajnom kursu poslovne banke. ISEC zadržava pravo izmene cena bez prethodne najave. Dostupna i oprema koje nema u cenovniku! Za detaljnije informacije, molimo kontakirajte nas na gore navedene brojeve telefona ili posetite www.isec.rs